


# artos<sup>®</sup>

## F901-3


## INSTALLATION GUIDE

microphone hand shower

BRUSHED NICKEL(BN)



CHROME(CH)



BLACK (BK)



# artos<sup>®</sup>

F901-3

## OPERATING SPECIFICATIONS

microphone hand shower



### FEATURES

Solid Brass

### OPERATING PRESSURE

Minimum: 15 psi

Maximum: 75 psi

Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°

### FLOW RATE

1.8 USGPM

### APPROVALS




# artos<sup>®</sup>


F901-3

**PRODUCT DIMENSIONS**

microphone hand shower

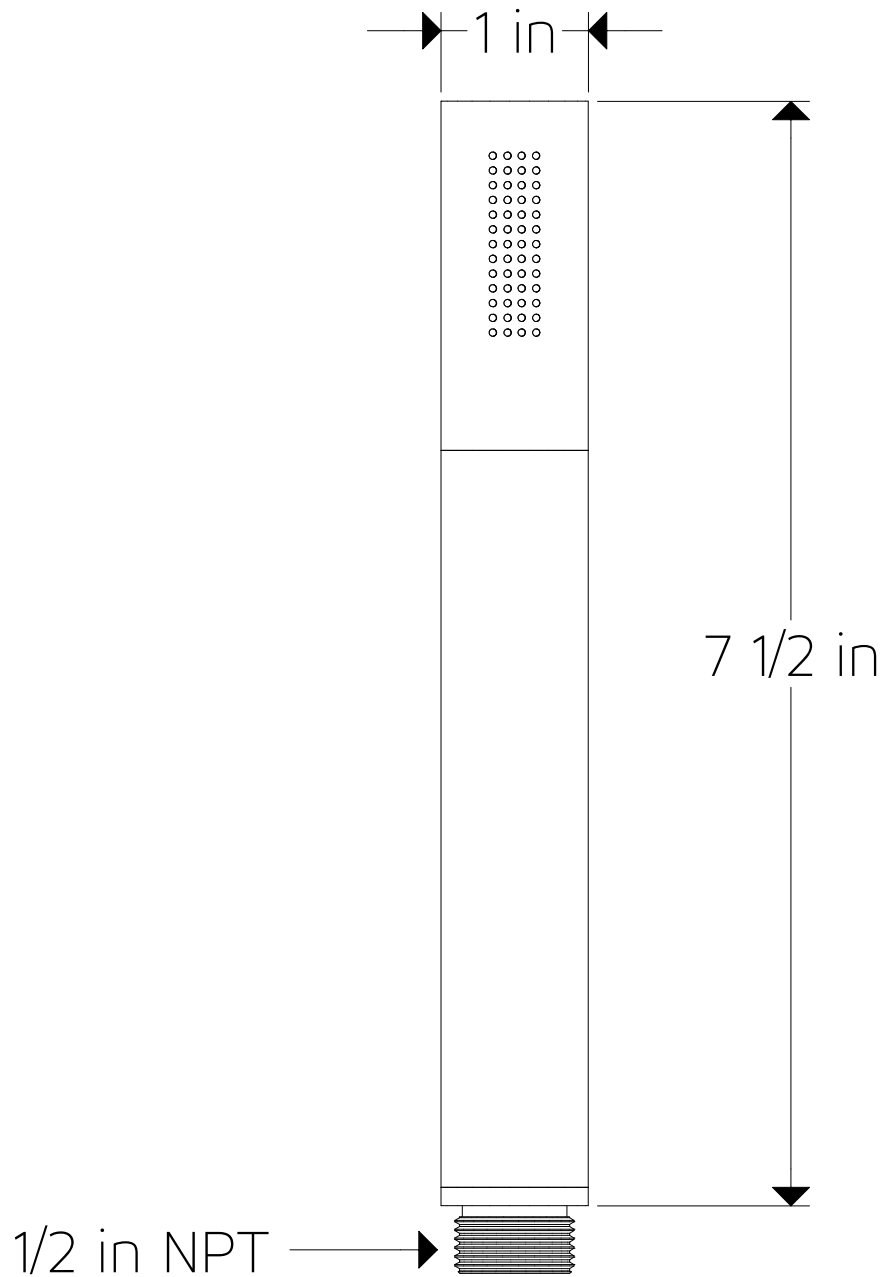

### STEP 1

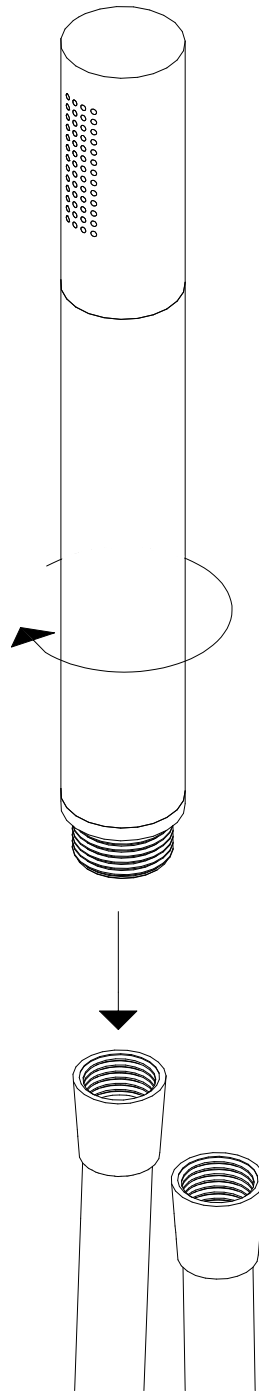

microphone hand shower

- 1** HAND SHOWER HEAD
- 2** O-RING
- 3** HAND SHOWER BODY
- 4** CHECK VALVE
- 5** SNAP RING

