

# artos<sup>®</sup>

## F902-15

## INSTALLATION GUIDE

single function hand  
shower square

BRUSHED NICKEL (BN)



CHROME (CH)



BLACK (BK)



# artos<sup>®</sup>

## F902-15

single function hand  
shower square

## OPERATING SPECIFICATIONS



### FEATURES

Solid Brass

### OPERATING PRESSURE

Minimum: 15 psi

Maximum: 75 psi

Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°

### FLOW RATE

1.8 USGPM

### APPROVALS




# artos<sup>®</sup>

## F902-15

single function hand  
shower square

## PRODUCT DIMENSIONS

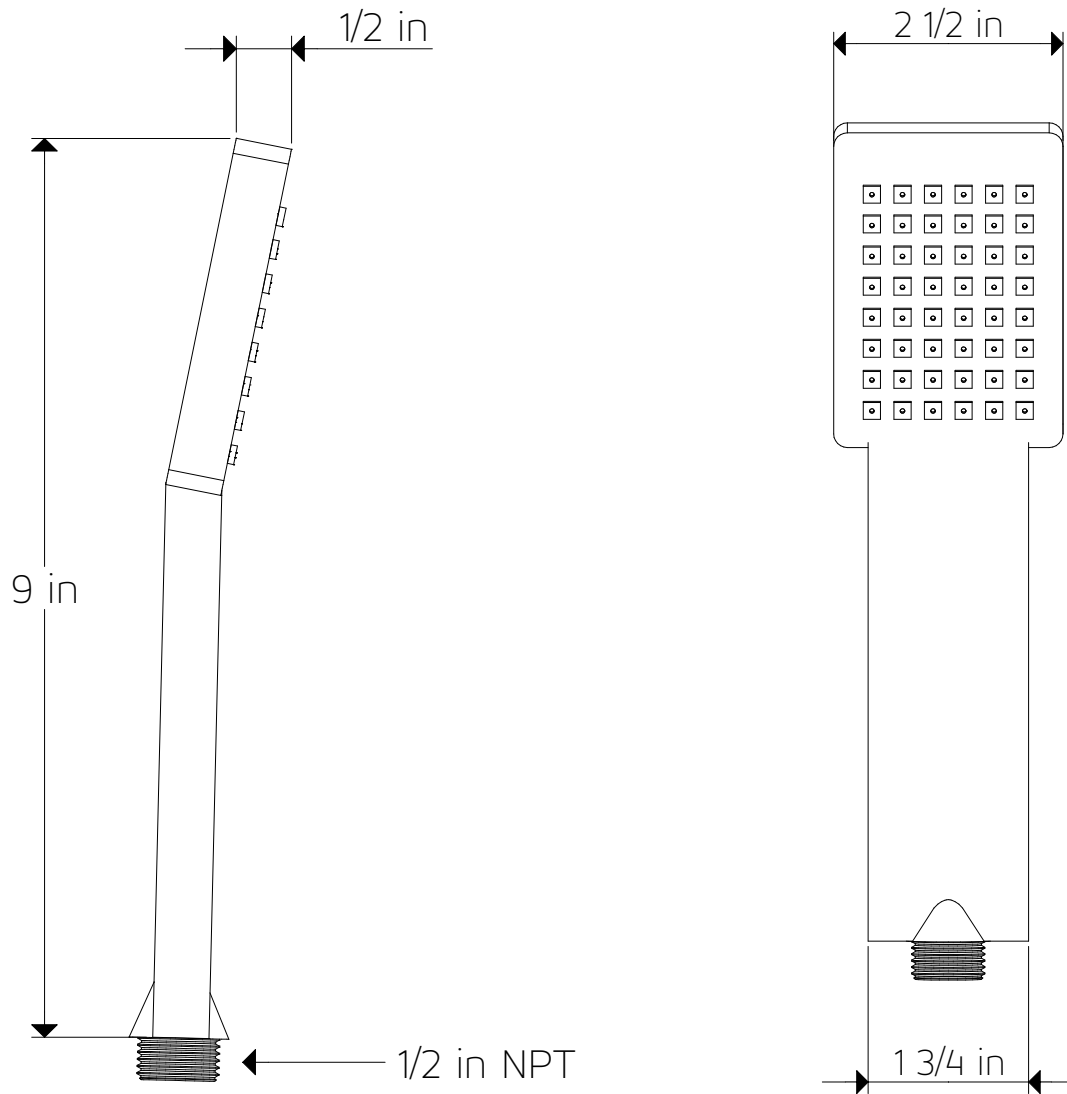


# artos<sup>®</sup>

F902-15

INSTALLATION STEPS

single function hand  
shower square

STEP 1

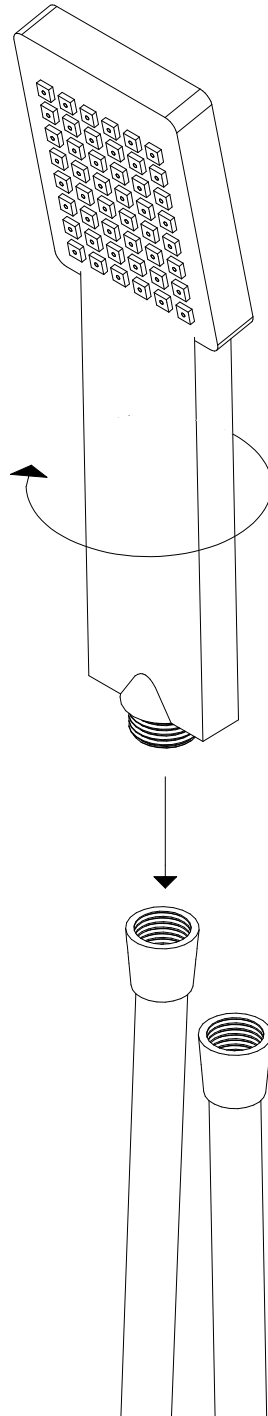

# artos<sup>®</sup>

## F902-15

single function hand  
shower square

### PARTS BREAKDOWN

