


**SensoWash® Starck f Shower toilet seat Plus # 612000011041320**

< 22 1/2 " >

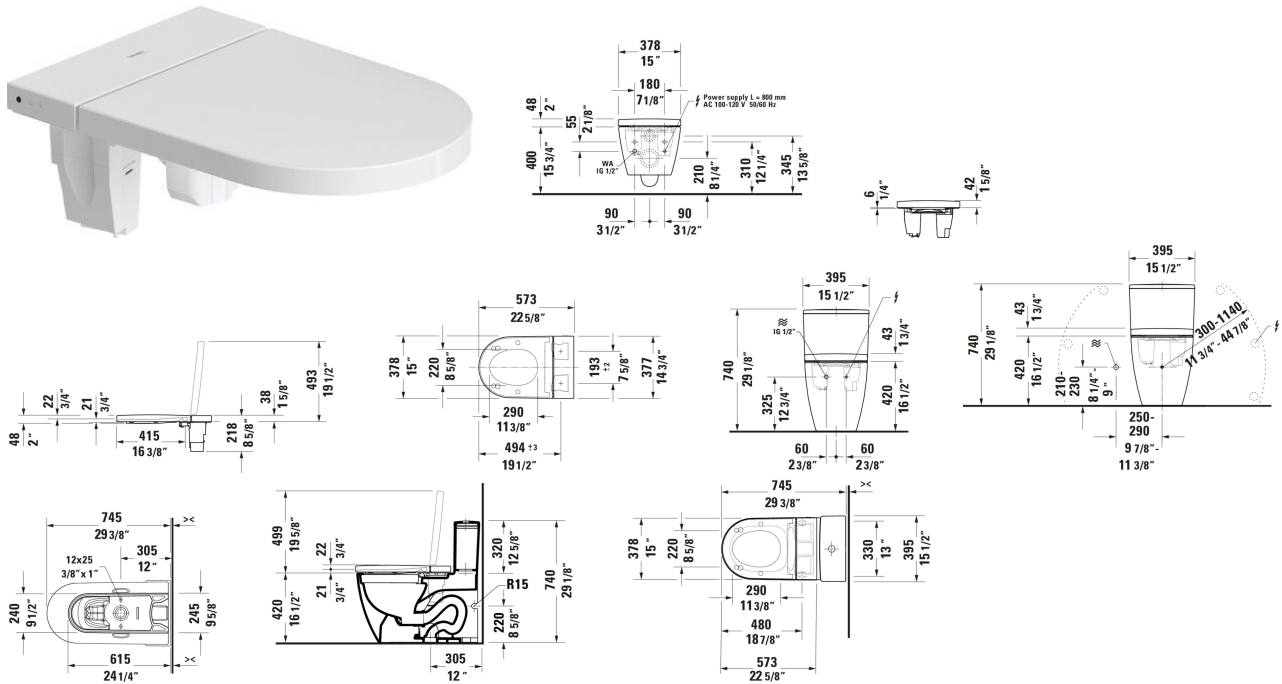

Shower toilet seat Plus	Dimension	Weight	Order number
<p>Lid actuation: At the touch of a button, Automatic, Adjustable blower levels: 1 Step, Number of warm air dryer options: 4 Steps, Water position adjustment: 5 Steps, Number of spray intensity options: 3 Steps, Number of spray temperature options: 4 Steps, Water position adjustment: 5 Steps, Rearwash, Frontwash, Pulsing shower spray: Oscillating, Self-cleaning function, Energy saving mode: Adjustable, Holiday mode, Night light</p>			
<p><b>Colors</b></p> <p>00 White</p>			
<p><b>Variant</b></p> <p>Matches series ME by Starck, White, Slow close, Seat material type: Duroplast, Lid material type: Duroplast, Lid actuation: Automatic, Touchless, At the touch of a button, Flow rate dryer: 12 m3/h, Warm air dryer, Heated seat, Operation type: Remote control, App, Number of user profiles: 2, Odor extraction, Electricity connections: External, Decalcification function, Connection voltage: 100 - 120 V, Min. frequency: 50 Hz, WaterSense: No, cUPC listed: Yes</p>	22 1/2 "x8 5/8 "	15.432 lb	612000011041320
<p><b>Installation accessories</b></p> <p>Installation Set</p> <p>Connection Set Shower-toilets</p>	<p>4 1/8 x 5 3/8 "</p> <p>8 5/8 x 2 3/8 "</p>	<p>0.948 lb</p> <p>0.617 lb</p>	<p>005072</p> <p>100731</p>

**SensoWash® Starck f Shower toilet seat Plus #**  
**612000011041320**

|< 22 1/2 " >|

Suitable products	
Wall Mounted Toilet HygieneGlaze, Flush water quantity: 1.28/1.28 gal, Washdown model, Flushing rim: Rimless, Flush system: washdown model, Outlet horizontal, Concealed fixation, cUPC listed: Yes, 14 1/8 x 22 5/8 "	251009
One Piece Toilet 29 3/8 ", elongated, HygieneGlaze, Flush water quantity: 1.32/1.32 gal, Siphonic, Flushing rim: Rimless, Outlet: vertical, Rough-in: 12 ", 14 7/8 x 29 3/8 "	218901

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.*