



86500

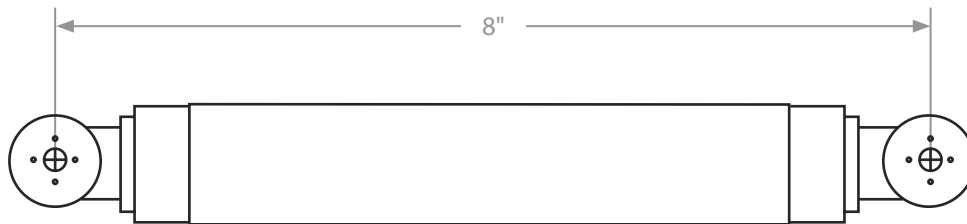

Standard Mounting

Thru-Bolt Mount with Decorative Caps

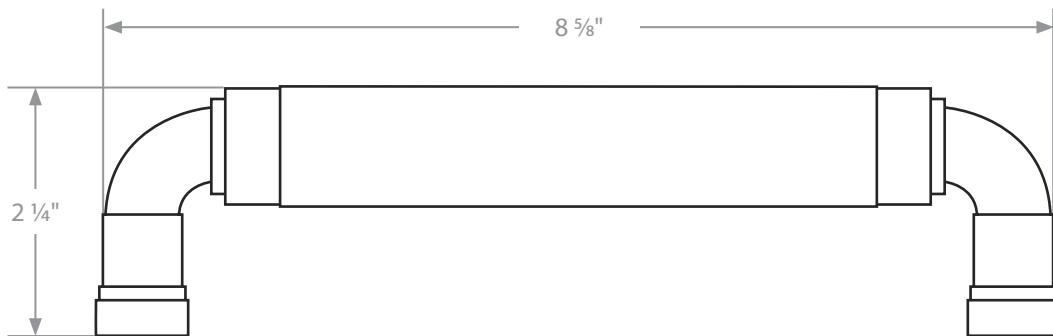

Appliance/Door pulls are drilled and tapped for $\frac{3}{8}$ "-16 thread to accommodate thread adapters. Fits standard door thickness of $1\frac{3}{4}$ ". Specify if thicker.

Supplied with:

- Two- Thread adapters for $\frac{1}{4}$ -20 thread
- Two- Thread adapters for #10-32 thread
- Two- #10-32 Flat head machine screws x 2" long
- Two- Threaded Washers
- Two- Decorative Caps

How To Order:

86500 US19
Product Code Finish

Optional Mounting

Concealed Surface Mount (CS)



Most appliance pulls and door pulls are available with Concealed Surface mounting. Fits minimum door thickness of $1\frac{1}{4}$ ".

Supplied with:

- One grip with $\frac{3}{8}$ " diameter hole in the stem
- Two- #10, 1" bevel head wood screws
- Two- #10-32 set screws

How To Order:

CS 86500 US19
Concealed Surface Mount Product Code Finish

Optional Mounting

Back-to-Back Mount (BTB)



Most appliance pulls and door pulls are available with Back-to-Back mounting. Fits standard door thickness of $1\frac{3}{4}$ ". Specify if thicker.

Supplied with:

- One grip with #10-32 threads in the stem
- One mating grip with $\frac{3}{8}$ " diameter hole in the stem
- Two- $\frac{3}{8}$ " diameter bevel head screws with #10-32 shaft by $2\frac{1}{2}$ " long
- Two- #10-32 set screws

How To Order:

BTB 86500 US19
Back-to-Back Mount Product Code Finish