


# F973AVO

3/4" Thermostat Valve with 3-Way Shared Diverter & Off Position

artos®

## OPERATING SPECIFICATIONS

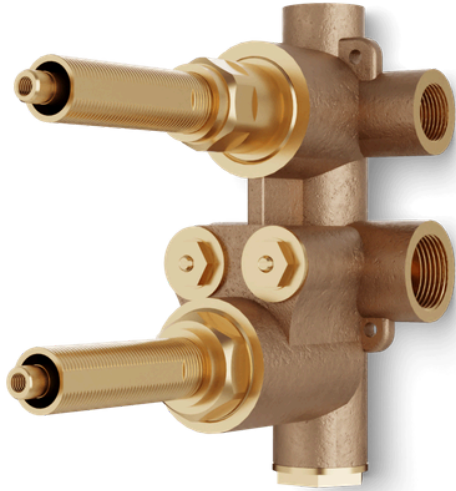

Operates with 1-3 Outlet Functions

### MIXED WATER TEMPERATURE

Maximum: 120°

### OPERATING TEMPERATURE

Maximum: 176°

Minimum: 50°

Minimum difference between hot mixed temperature 50°

### OPERATING PRESSURE

Minimum: 20psi

Maximum: 125psi

Recommended: 30psi-95psi

Operating pressures (on hot and cold lines) should be kept as balanced as possible, in order to assure the maximum efficiency

### FLOW RATE

8 USGPM at 60PSI

### MATERIAL

Solid Brass

### STANDARDS

ASSE 1016.ASME A112.18.1/CSA B123.1

To view all standards, please visit product approvals in our learning hub at [artos.us.com](https://artos.us.com)



All technical specifications, product details, and pricing are subject to change without prior notice. Artos makes every effort to ensure accuracy; however, errors or omissions may occur. It is the responsibility of the installer, designer, or purchaser to verify all critical dimensions, installation requirements, and compliance with applicable codes prior to use.

Artos assumes no liability for damages, losses, or injuries resulting from the use of this documentation or from product installation, operation, or maintenance performed outside of Artos instructions and applicable codes. Product warranties are limited to those expressly stated by Artos. Please refer to official warranty documentation for complete terms and conditions.

All drawings, manuals, and specifications are the property of Artos and may not be reproduced, distributed, or altered without prior written permission.

# F973AVO

artos®

3/4" Thermostat Valve with 3-Way Shared Diverter  
& Off Position

## PRODUCT DIMENSIONS

