

# PS140

artos®

Round Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower

## OPERATING SPECIFICATIONS



### OPERATING PRESSURE

Minimum: 15 psi

Maximum: 125 psi

Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°

### FLOW CAPACITY

Shower Head: 1.8 USGPM

Hand Shower: 1.8 USGPM



### STANDARDS

ASSE 1016-2011

ASME\_A112.1016-2011

CSA B125:16-11



# PS140


artos®

Round Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower

## PRODUCT DIMENSIONS

### PRODUCT SKU

F903B-58TK

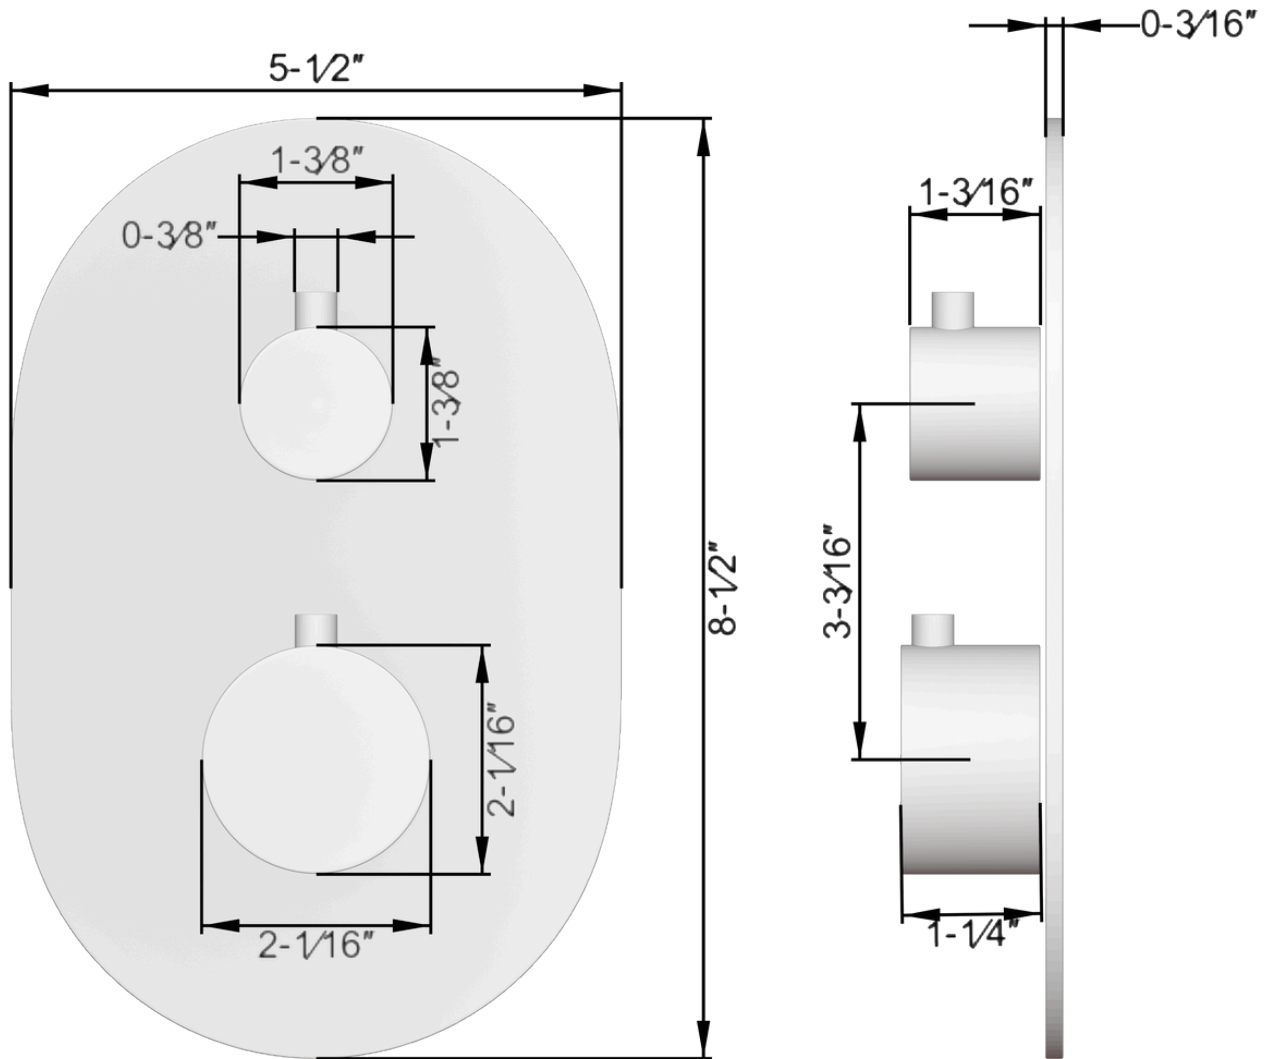

# PS140


artos®

Round Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower

## PRODUCT DIMENSIONS

### PRODUCT SKU

F902-1

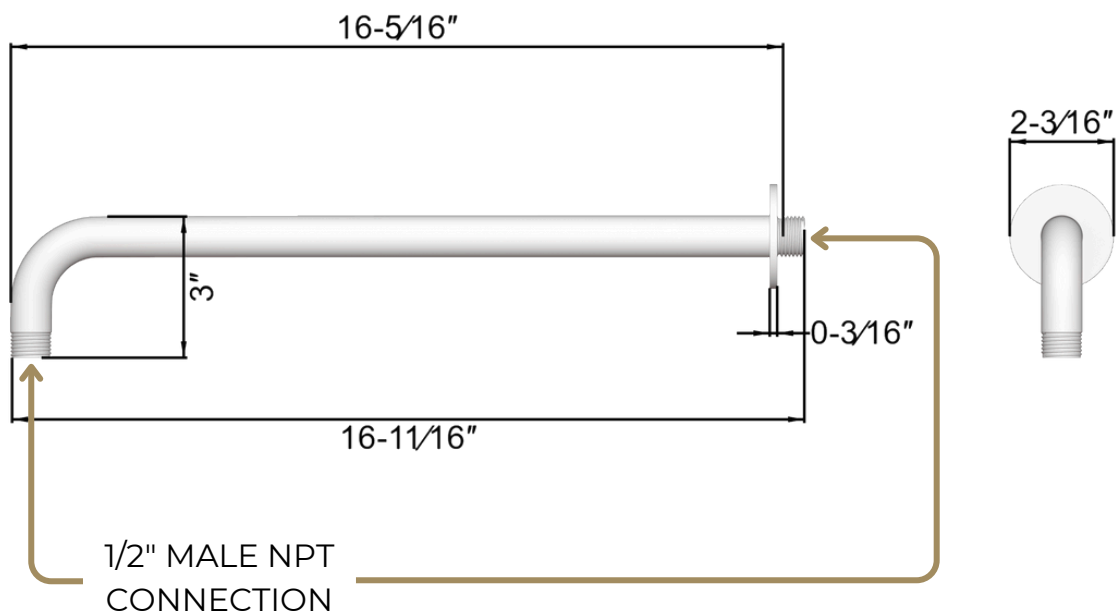


# PS140

artos®

Round Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower

## PRODUCT DIMENSIONS

**PRODUCT SKU**  
F901-8

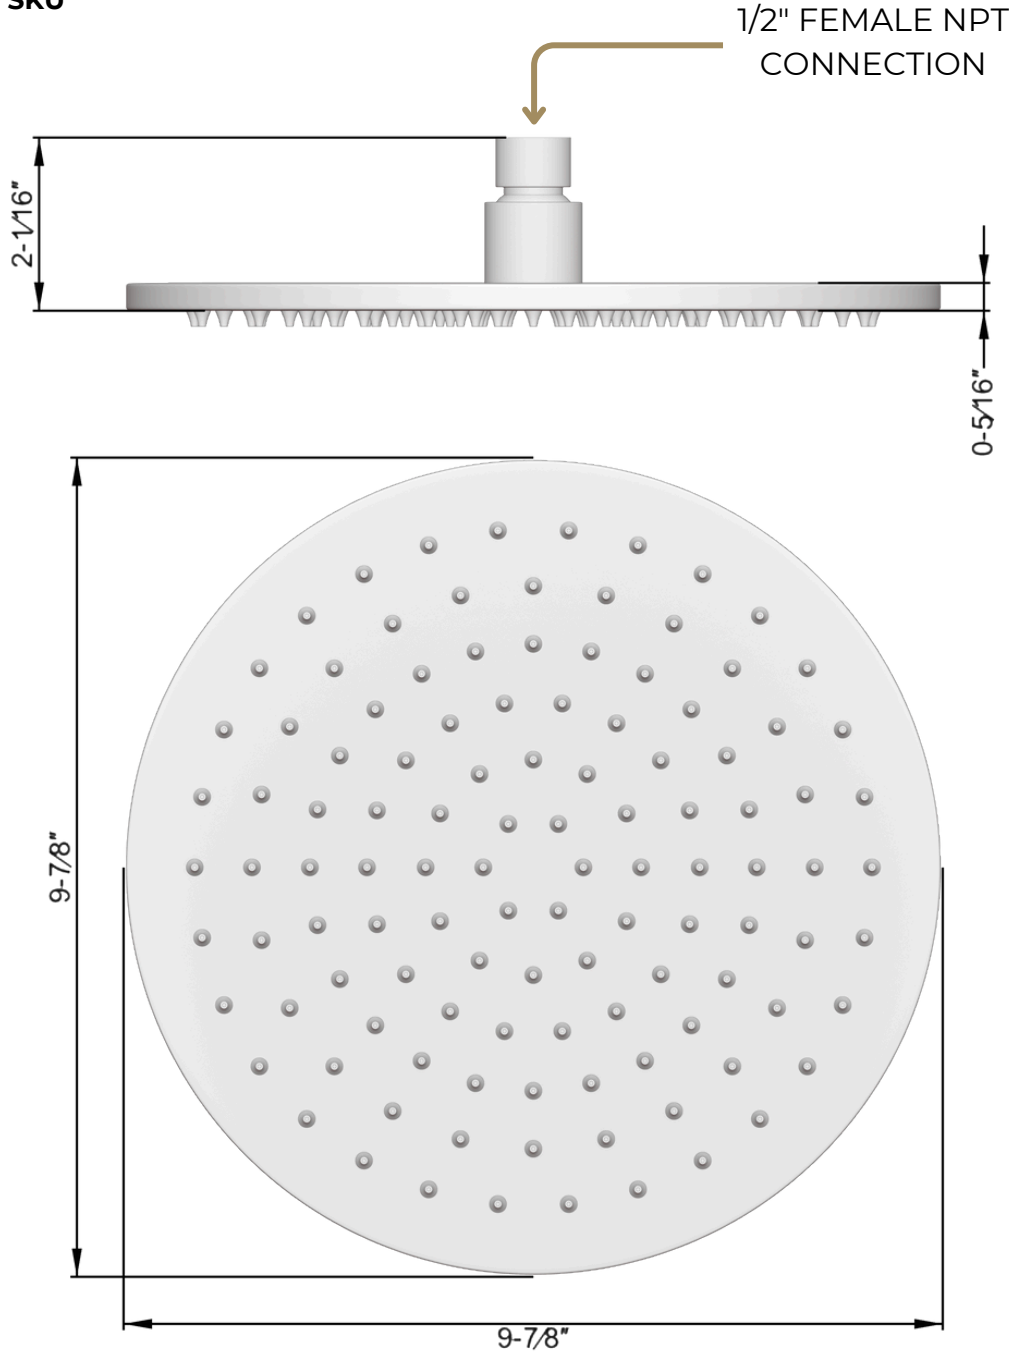

# PS140


artos®

Round Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower

## PRODUCT DIMENSIONS

### PRODUCT SKU

F902-42

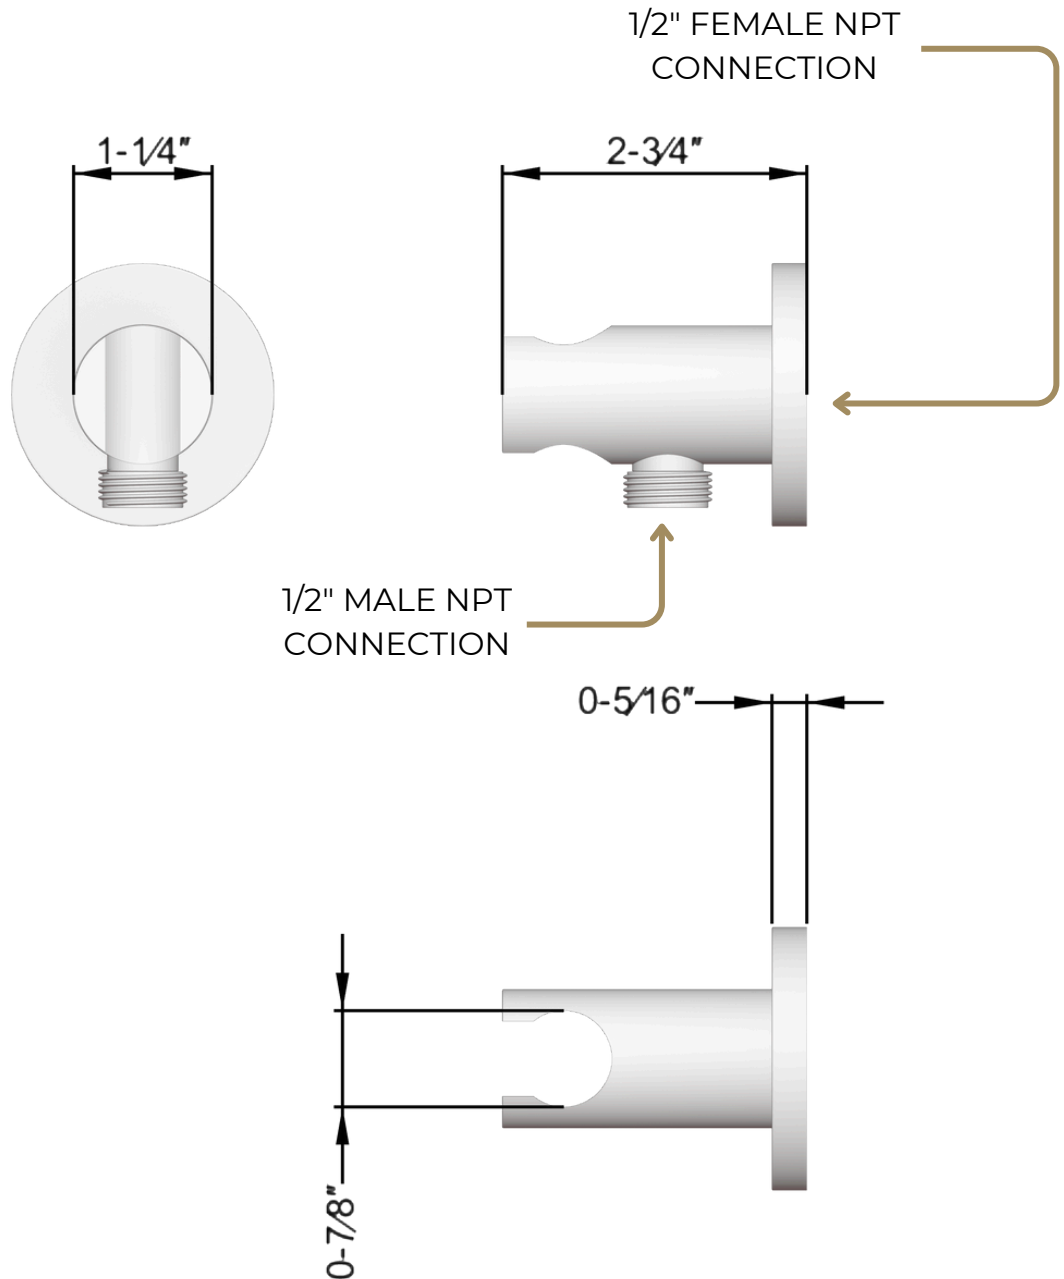

# PS140


Round Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower

artos®

## PRODUCT DIMENSIONS

### PRODUCT SKU

F901-3

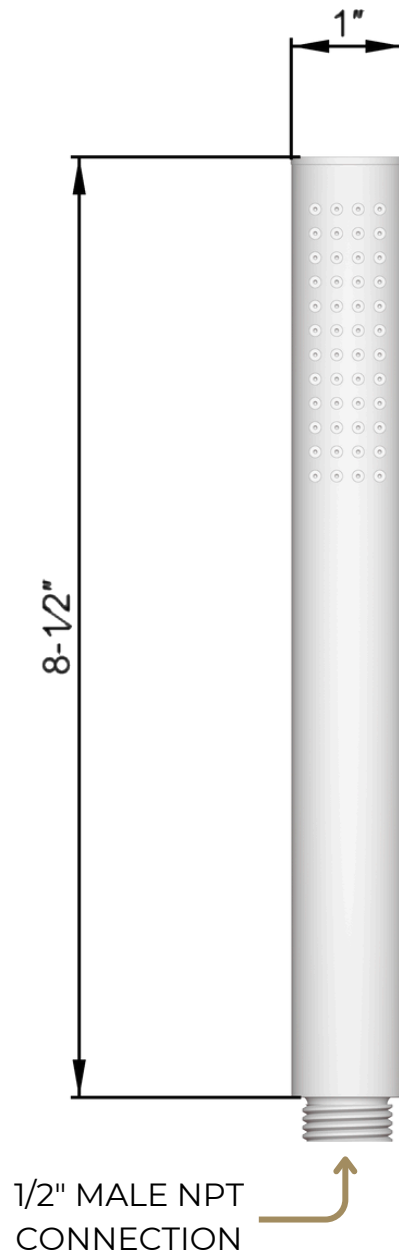

# PS140

Round Thermostatic Shower Trim Kit with Wall  
Mount Shower Head, Hand Held Shower


artos®

## PRODUCT DIMENSIONS

---

### PRODUCT SKU

F902-8

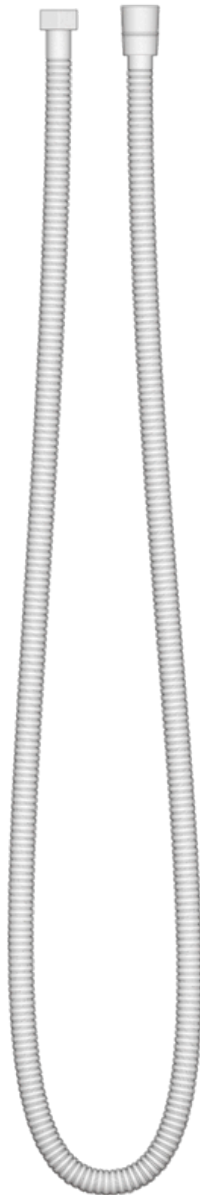

### METAL SHOWER HOSE

1/2" FEMALE NPT CONNECTIONS  
60" IN LENGTH