

PS143

artos®

Square Thermostatic Shower Trim Kit with Wall Mount Shower Head, Tub Filler

OPERATING SPECIFICATIONS



OPERATING PRESSURE

Minimum: 15 psi

Maximum: 125 psi

Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY

Shower Head: 1.8 USGPM

Handshower: 1.8 USGPM



STANDARDS

ASSE 1016-2011

ASME_A112.1016-2011

CSA B125:16-11



PS143


Square Thermostatic Shower Trim Kit with Wall Mount Shower Head, Tub Filler

artos®

PRODUCT DIMENSIONS

PRODUCT SKU

F903B-59TK

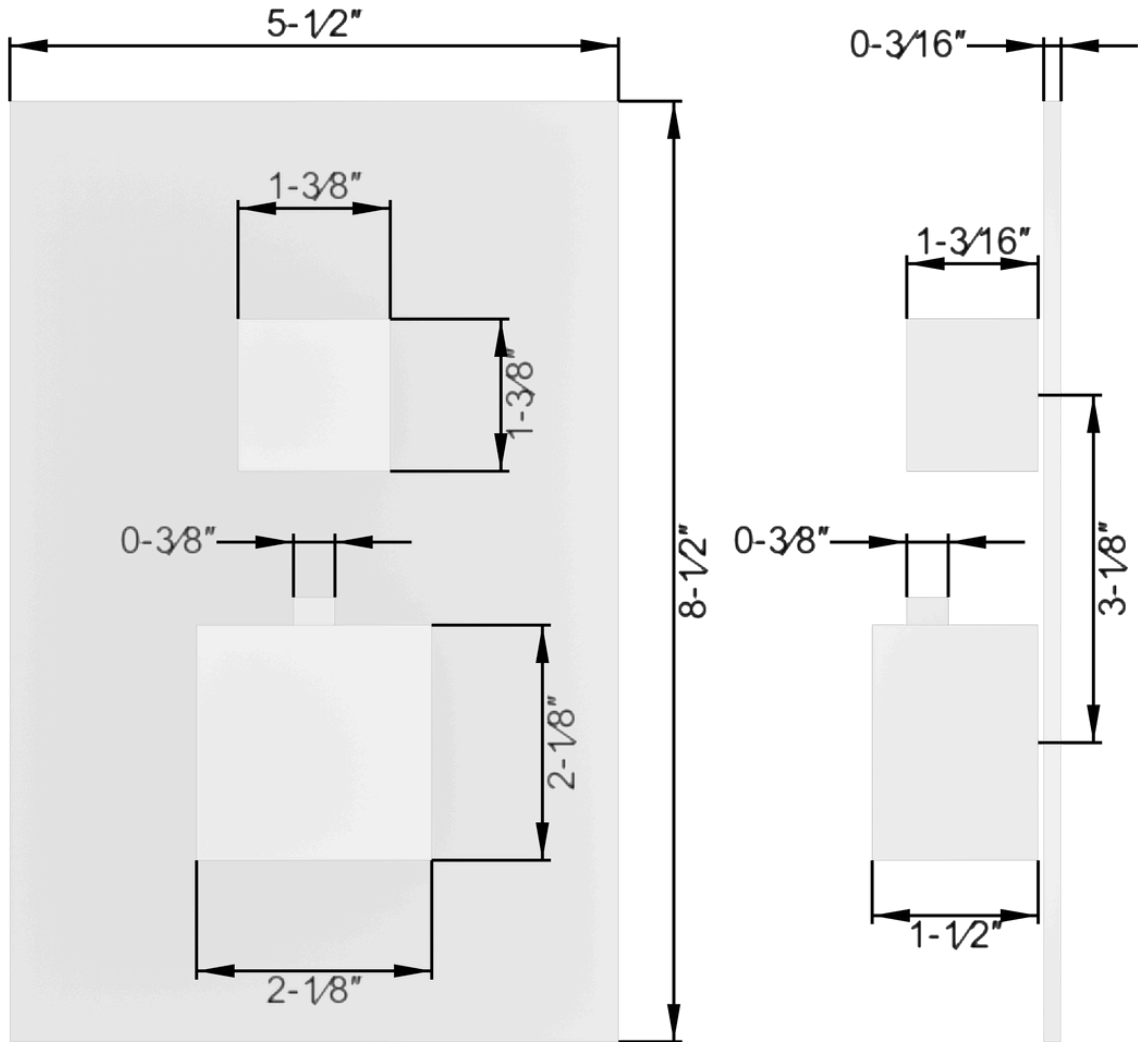

PS143


Square Thermostatic Shower Trim Kit with Wall Mount Shower Head, Tub Filler

artos®

PRODUCT DIMENSIONS

PRODUCT SKU

FSC1001

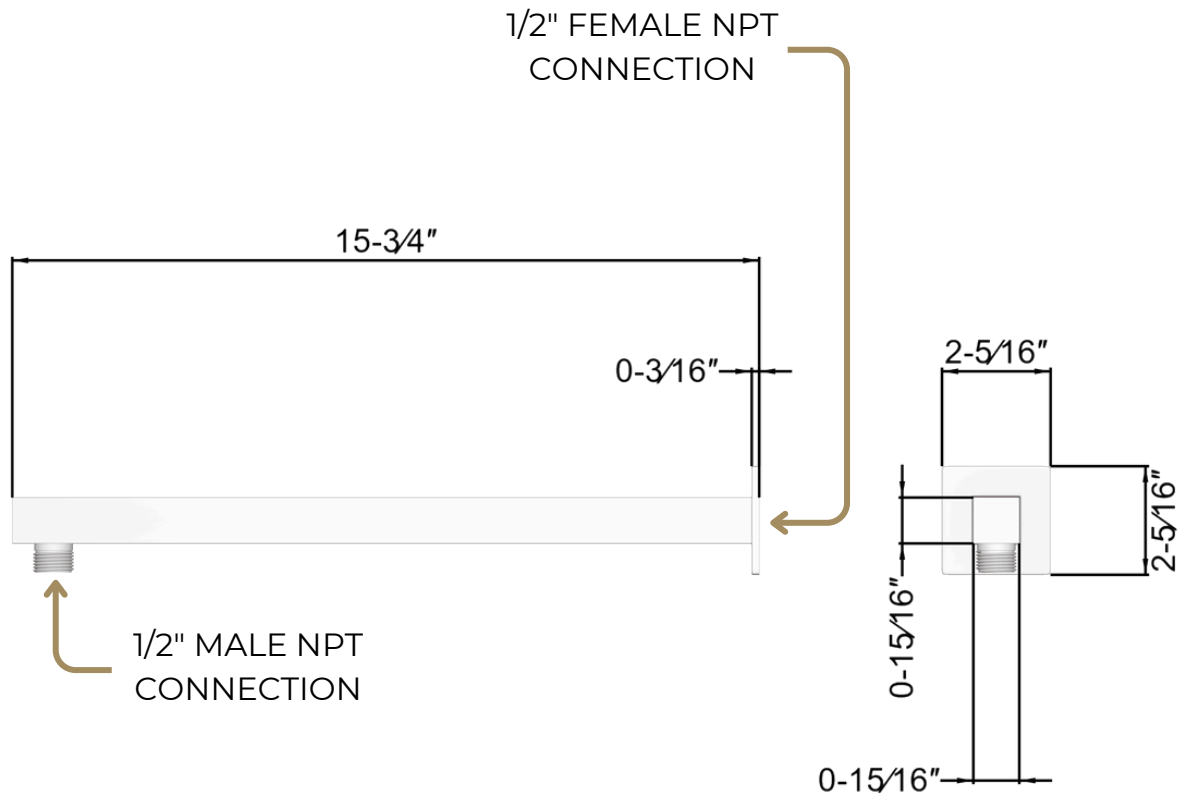

PS143


artos®

Square Thermostatic Shower Trim Kit with Wall
Mount Shower Head, Tub Filler

PRODUCT DIMENSIONS

PRODUCT SKU

F901-9

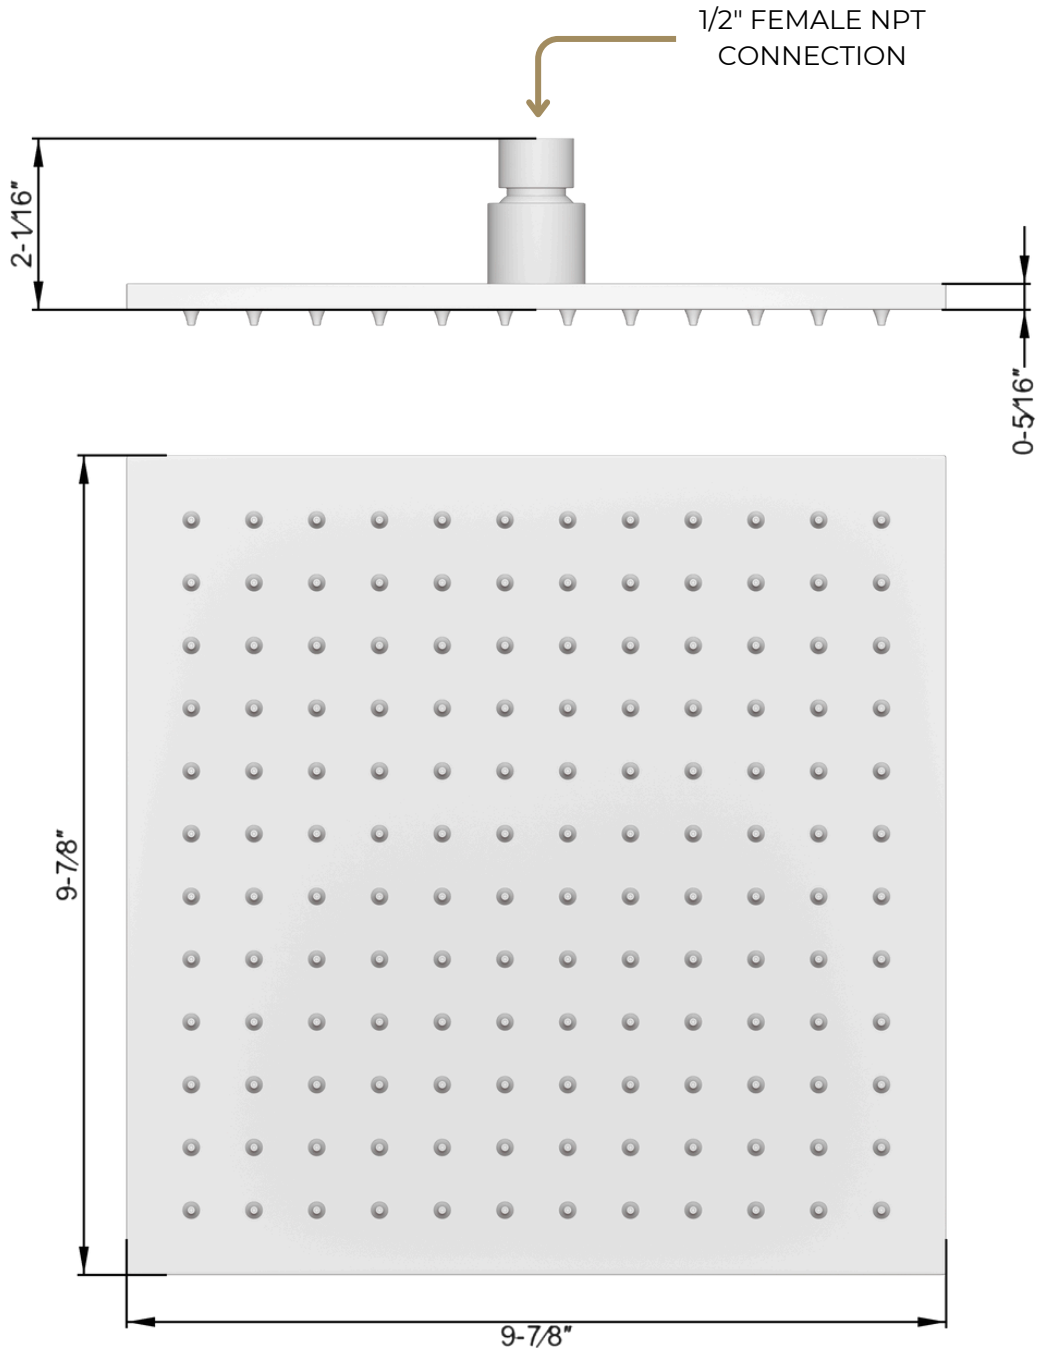

PS143

artos®

Square Thermostatic Shower Trim Kit with Wall Mount Shower Head, Tub Filler

PRODUCT DIMENSIONS

PRODUCT SKU

F402-10

DOUBLE O-RING
PUSH FIT SEAL
WITH SET SCREWS
SECURING FROM
BENEATH

1/2" MALE NPT
CONNECTION

