

PS145

Square + Round Thermostatic Shower Trim Kit
with Wall Mount Shower Head, Tub Filler

artos®

OPERATING SPECIFICATIONS



OPERATING PRESSURE

Minimum: 15 psi

Maximum: 125 psi

Above 90psi it may be necessary to
install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY

Shower Head: 1.8 USGPM



STANDARDS

ASSE 1016-2011

ASME_A112.1016-2011

CSA B125:16-11



PS145


artos®

Square + Round Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Tub Filler

PRODUCT DIMENSIONS

PRODUCT SKU

F903B-60TK

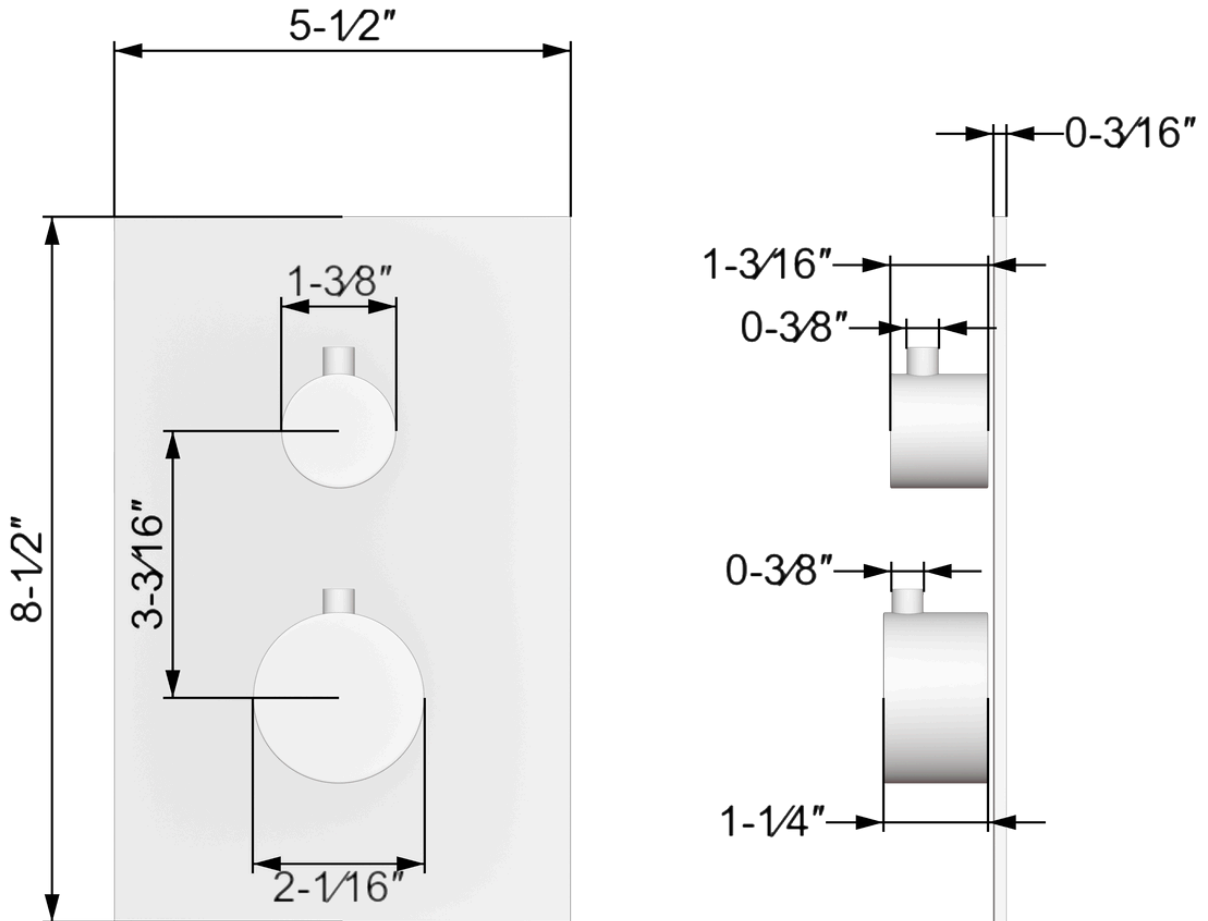

PS145


artos®

Square + Round Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Tub Filler

PRODUCT DIMENSIONS

PRODUCT SKU

F902-27

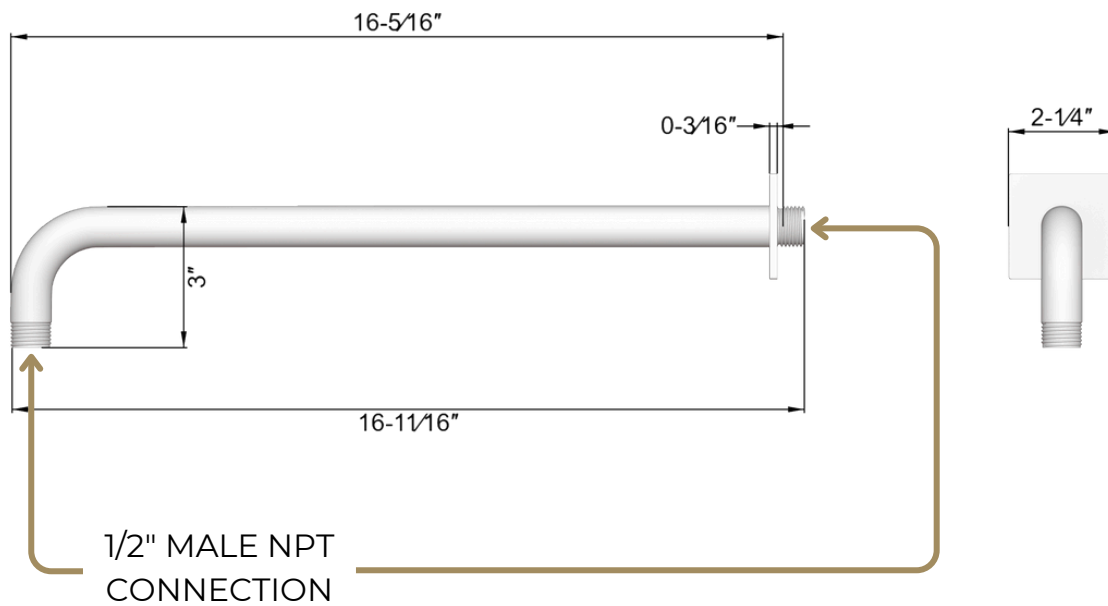

PS145


artos®

Square + Round Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Tub Filler

PRODUCT DIMENSIONS

PRODUCT SKU

F901-8

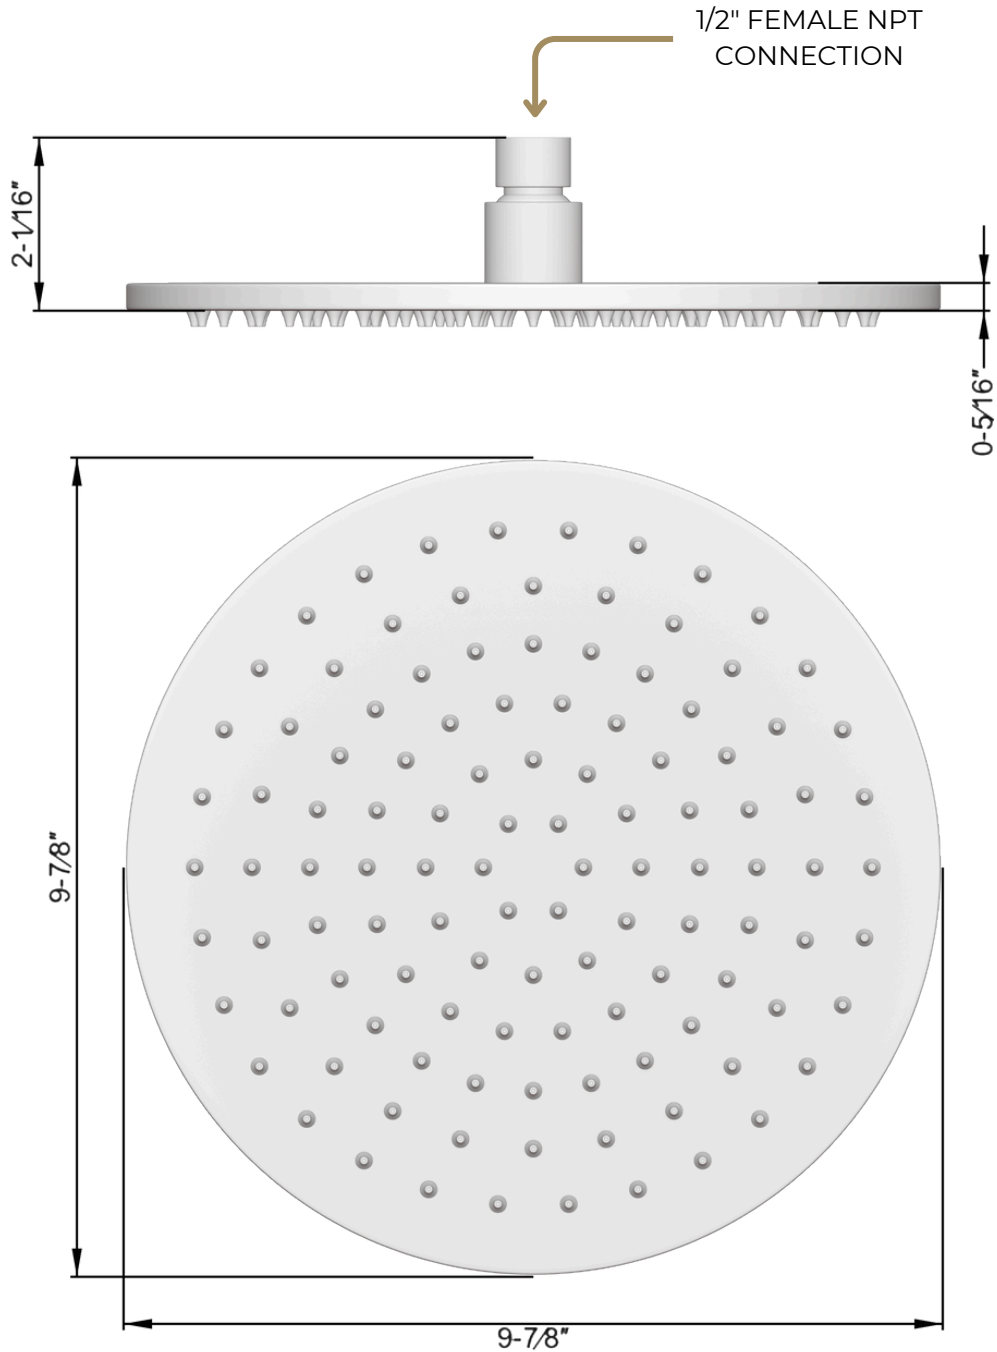

PS145

artos®

Square + Round Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Tub Filler

PRODUCT DIMENSIONS

PRODUCT SKU

F402-10

DOUBLE O-RING
PUSH FIT SEAL
WITH SET SCREWS
SECURING FROM
BENEATH

