





NEW

OPUS 6434


64" x 34" x 25" (FREESTANDING)

A symphony of lines and curves inspired by the creative genius of the artist.




PRODUCT NO.				
MODEL	TMU	TUB		
Freestanding	BOS2RF00S	BOS2RF00F		
THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system 		\$		
Jets				42
1 heated backrest				Included
MiaPlus® Control (not installed)				Included
BU-Touch Control Application BUTOUCH				Included
TUB Soaker 		\$		
FEATURES				
Installation type			Freestanding	
No. of bathers		Imp. gallons	TMU 62	TUB 68
US gallons	TMU 74 TUB 81	Armrests		2
INTEGRATED WASTE & OVERFLOW BOVERINI-XX				
Matte White** 32, Chrome 07, Brushed Nickel 09, Polished Nickel 10			Installed & Included	
STANDARD COLOR				
	White 01			Included
FINISH				
Satin Finish			Included	

OPTIONS (UPCHARGE APPLICABLE)	
INTEGRATED WASTE & OVERFLOW BOVERINI-XX	
Matte Black 19, Satin Brass 18	\$
ISLAND TUB DRAIN™*	
Island Tub Drain™ BISLDD	\$
Cast Iron Island Tub Drain™ BISLDDCI	\$
IF REQUIRED BY CONSTRUCTION CODE OR INSTALLED WITH ITD*	
Brass waste kit BDRCBF	\$
Matte White** 32, Chrome 07, Brushed Nickel 09, Polished Nickel 10, Matte Black 19, Satin Brass 18	\$

 Don't forget to indicate the finish for the Integrated Waste & Overflow and, if needed, for the Brass waste kit.
 * An Island Tub Drain™ and the Brass waste kit are required when there is **no access under the bath**.
 ** On a FineStone bath, the white Integrated Waste and Overflow has a Matte Finish.

TOTAL PRICE	\$
--------------------	----

 Made with FineStone®


FineStone® is a high quality solid surface material composed of refined minerals and pure acrylic. Designed with care, this material is non porous, hygienic, and thermal insulant. Its satin finish is easy to clean and will maintain its properties through time.



OPUS 6434 (FREESTANDING)



INSTALLATION

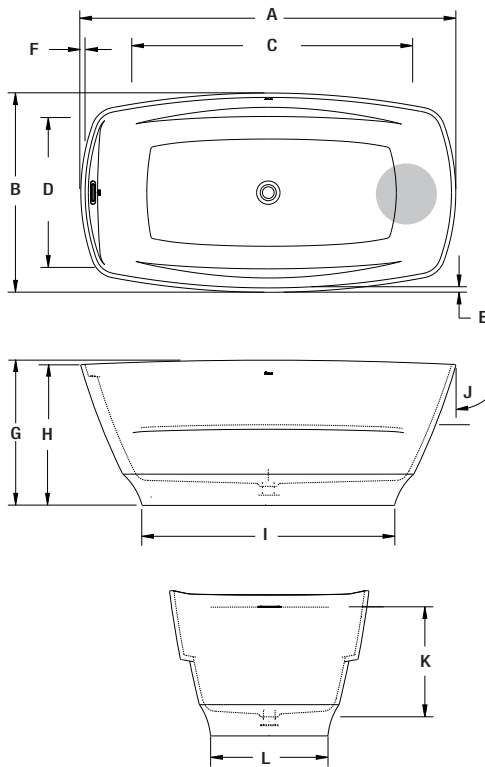

LETTER	DESCRIPTION	MEASURE	
		TMU	TUB
A	Total length	64"	64"
B	Total width	34"	34"
C	Bathing well length	48 15/16"	47 15/16"
D	Bathing well width	22 1/16"	23 1/8"
E	Deck width	1 5/8"	3/4"
F	Deck width	3/4"	3/4"
G	Total maximal height	24 3/4"	24 3/4"
H	Total minimal height	24"	24"
I	Base length	45 5/16"	43 1/16"
J	Slope of backrest	19°	23°
K	Maximum water level	18"	18 1/4"
L	Base width	23"	20 1/16"

● Indicates heated backrest (TMU)

TECHNICAL SPECIFICATIONS

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is a 15A, 120 V, 60 Hz , dedicated lines with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	<ul style="list-style-type: none"> - The turbine must be remotely installed. - Faucet must be freestanding or wall-mounted. - Controls cannot be installed on the deck of the bath.

Our products must be installed by certified professionals only and according to our Installation Instructions as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

	TMU	TUB
Cutting template	# 90000089	# 90000088
Approx. bathtub weight	380 lbs	285 lbs
Turbine power		550 W
Air Heater		600 W
WARRANTY		
Controls		5 years
Bath & turbine*		20 years

* Some restrictions apply | www.bainultra.com/warranty

The specifications shown indicate the outer edge dimension and the inside bathing capacity. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.