




CITTI 6032 WITHOUT INSERT



Front overflow

INSTALLATION

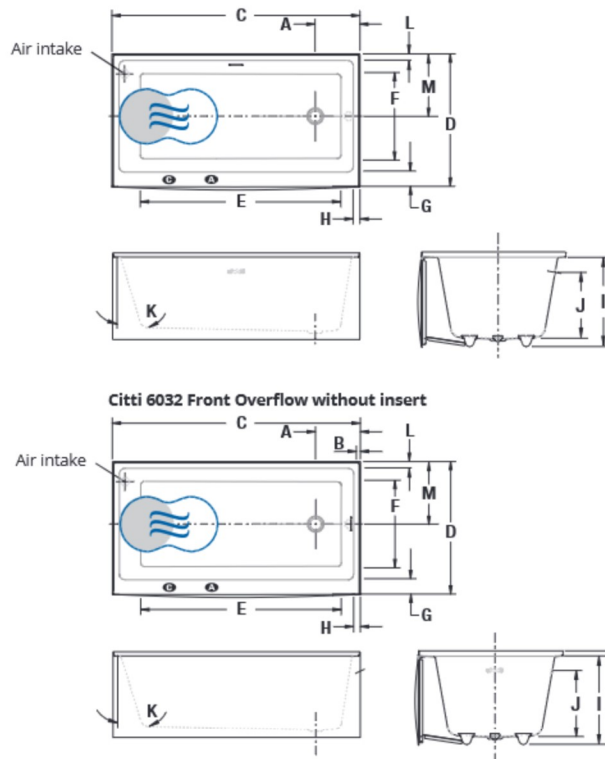

| LETTER | DESCRIPTION | MEASURE |
|--------|--|----------------------|
| A | Outside edge to center drain (integrated waste & overflow) | 10 7/8" |
| B | Outside edge to center of drain hole Waste & overflow 16" x 35" Front Overflow only | 1 3/8" |
| C | Total length | 60" |
| D | Total width | 32" |
| E | Bathing well length | 49 1/4" |
| F | Bathing well width | 21 1/8" |
| G | Deck width (skirt side) | 3 3/4" |
| H | Deck width at drain end | 2 1/8" |
| I | Height from bottom of bath to top deck | 20" |
| J | Maximum water level Maximum water level with AromaFlow | 14 1/2" 13 13/16" |
| K | Slope of backrest | 17° |
| L | Deck width overflow side | 2 1/8" |
| M | Outside edge to center drain | 15 1/8" |
| N | Tile flange height | 1" |

- A** AromaCloud® position
- C** Control position when factory-installed (Mia® or DOT)
- Indicates heated backrest (TMU)
- ☞ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

| | |
|----------------------------------|--|
| Hot water supply required | The hot water supply should be 70% or more of the bath's total water capacity. |
| Turbine | Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum. |
| Others | <ul style="list-style-type: none"> - The Geysair® is located on the same side as the heated backrest. It must NOT be relocated. It must be connected to the hot water supply and be accessible (provide access). - The turbine must be remotely installed. - Citti bathtubs include an integrated tile flange, specify right or left. - The water level will be lower when an AromaFlow is installed. |

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

| | |
|--------------------------------|--------|
| Approx. shipping weight | 125 lb |
| Turbine power | 550 W |
| Air heater | 600 W |

WARRANTY

| | |
|-----------------------|----------|
| Controls-LED-Geysair* | 5 years |
| Bath & turbine* | 20 years |

* Some restrictions apply | www.bainultra.com/warranty