


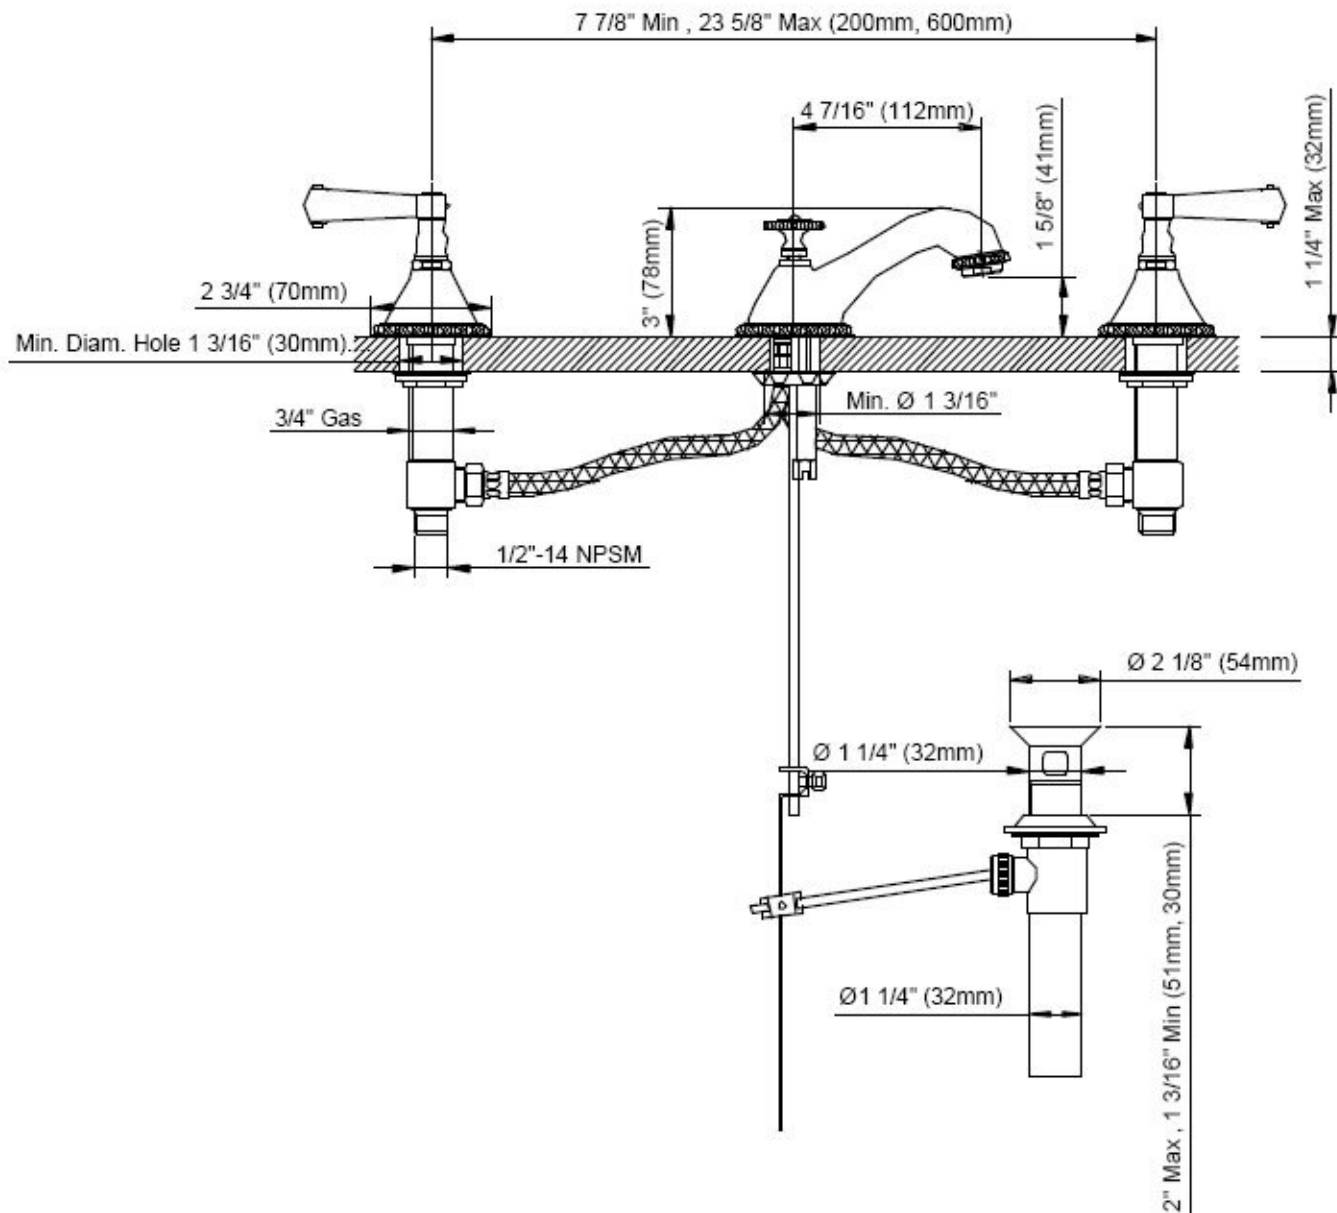

Recommended Hole Diameters: Spout – 1 1/4"
Valves – 1 1/4"

Valve: 1/2 inch Ceramic disc valve cartridge. 1,000,000 Tested cycles.
1/4 Turn positive on/off.
Non-rising spindle

Inlets: Sized for either 1/2" IPS or sweat connections.

Pressure: Maximum (tested); 200 psi (14.1kg/cm²).
Recommended (flowing); 15-75 psi (1.1-5.3 kg/cm²).

Flow rates: 2.2 GPM @ 60 psi
(8.41L/min. @ 4.2 kg/cm²).