


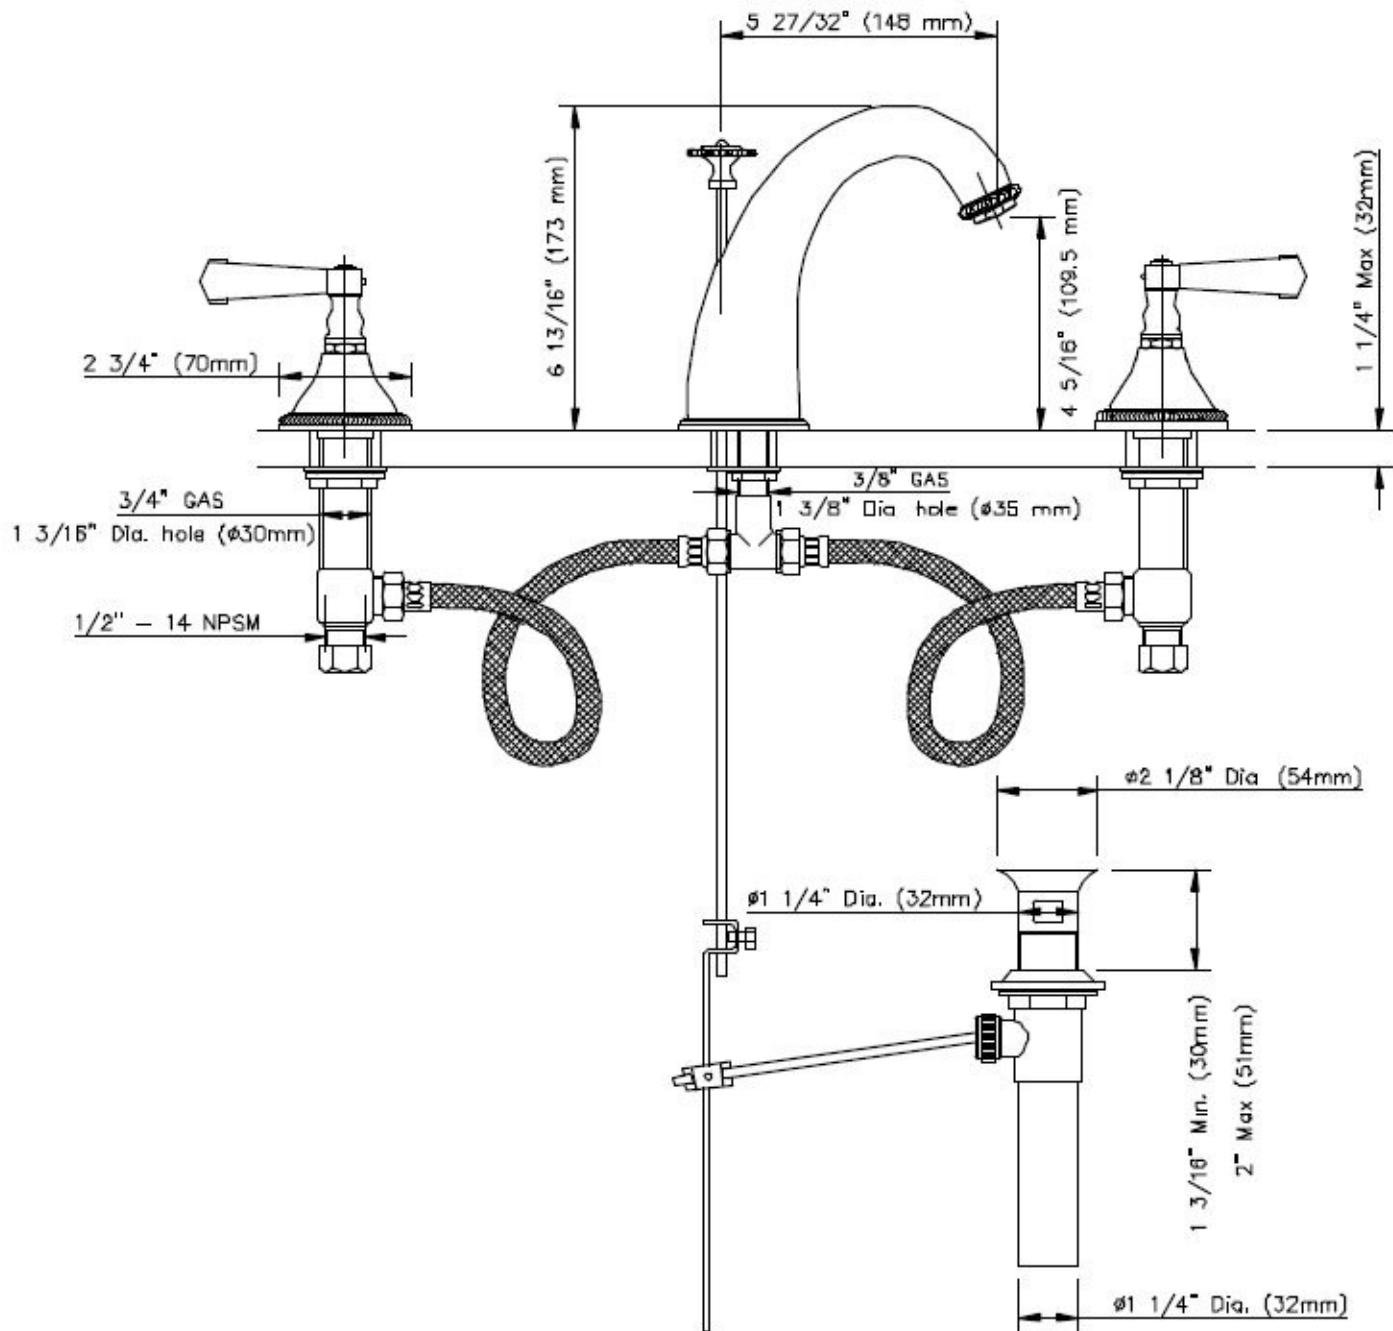

Recommended Hole Diameters: Spout – $1\ 1/4"$
Valves – $1\ 1/4"$

Valve: $1/2$ inch Ceramic disc valve cartridge. 1,000,000 Tested cycles.
 $1/4$ Turn positive on/off.
Non-rising spindle

Inlets: Sized for either $1/2"$ IPS or sweat connections.

Pressure: Maximum (tested); 200 psi (14.1 kg/cm²).
Recommended (flowing); 15-75 psi (1.1-5.3 kg/cm²).

Flow rates: 2.2 GPM @ 60 psi
(8.41 L/min. @ 4.2 kg/cm²).