


Product specifications

- 15 3/4" x 12 5/8" rain showerhead
- 1/2" connection
- Pre-assembled stainless steel casing
- Descaling system
- Water flow rate limited to max. 2.5 gpm
- Minimum flow pressure: 29 Psi
- Max. flow pressure: 58 Psi
- Weight 15 Lbs

Planning information

Plumbing

- For choosing the drainage, taking into consideration the output of items in the shower, the specific demand needs to be assessed.
- Manual control via xTOOL or Concealed thermostat

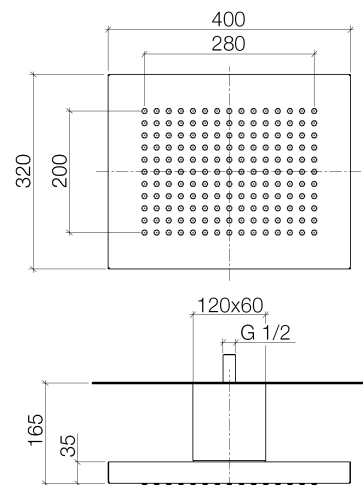




Surfaces

- polished stainless steel41507979-850010
- polished stainless steel41507979-850010
- brushed stainless steel41507979-860010
- brushed stainless steel41507979-860010

Accessories required

- Rough-in adaptor; 35080970
- Rough-in adaptor; 35080970

Exploded assembly drawing

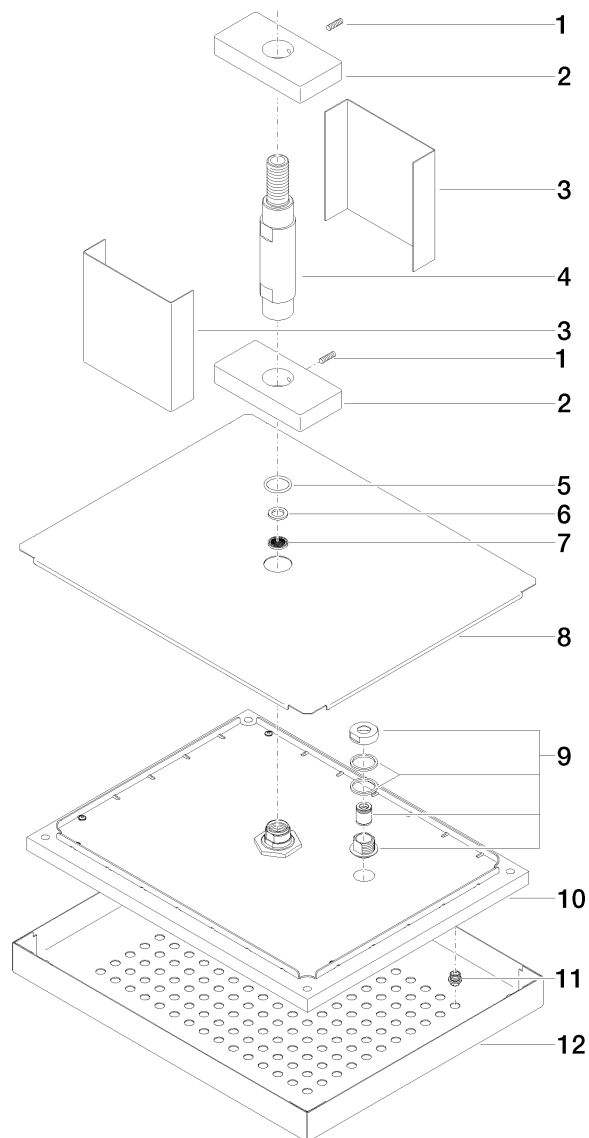

Order quantity

No.	Article number	Name	Installation quantity
1	09230106990	flow reducer	1
2	09311111390	pin	2
3	09111009190	base	2
4	091101117ff	cover	2
5	09110306090	connection	1
6	09141001590	seal	1
7	09142000290	seal	1
8	09230103990	insert	1
9	091102132ff	cover	1
10	0424031910090	nipple	1
11	0412050070190	shower	1
12	0429030350090	insert	165
13	04110212001ff	cover	1

