

**38-8.3- -EV4**

Floor Mount Tub Filler with Hand Shower

Hand Shower Flow Rate: 2.0 GPM

Note: Some building codes may require a remote pressure balance valve for anti-scald, such as the SS-PB50.



Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings"

**WATERMARK** DESIGNS 11/14/2014

350 Dewitt Ave Brooklyn NY 11207 USA T 718 257 2800 F 718 257 2144 info@watermark-designs.com


**38-8.3- \_EV4**

**Floor Mount Tub Filler with Hand Shower**

Hand Shower Flow Rate: 2.0 GPM

Note: Some building codes may require a remote pressure balance valve for anti-scald, such as the SS-PB50.

K=5.5"  
L=6.5"  
M=7.5"  
N=8.5"

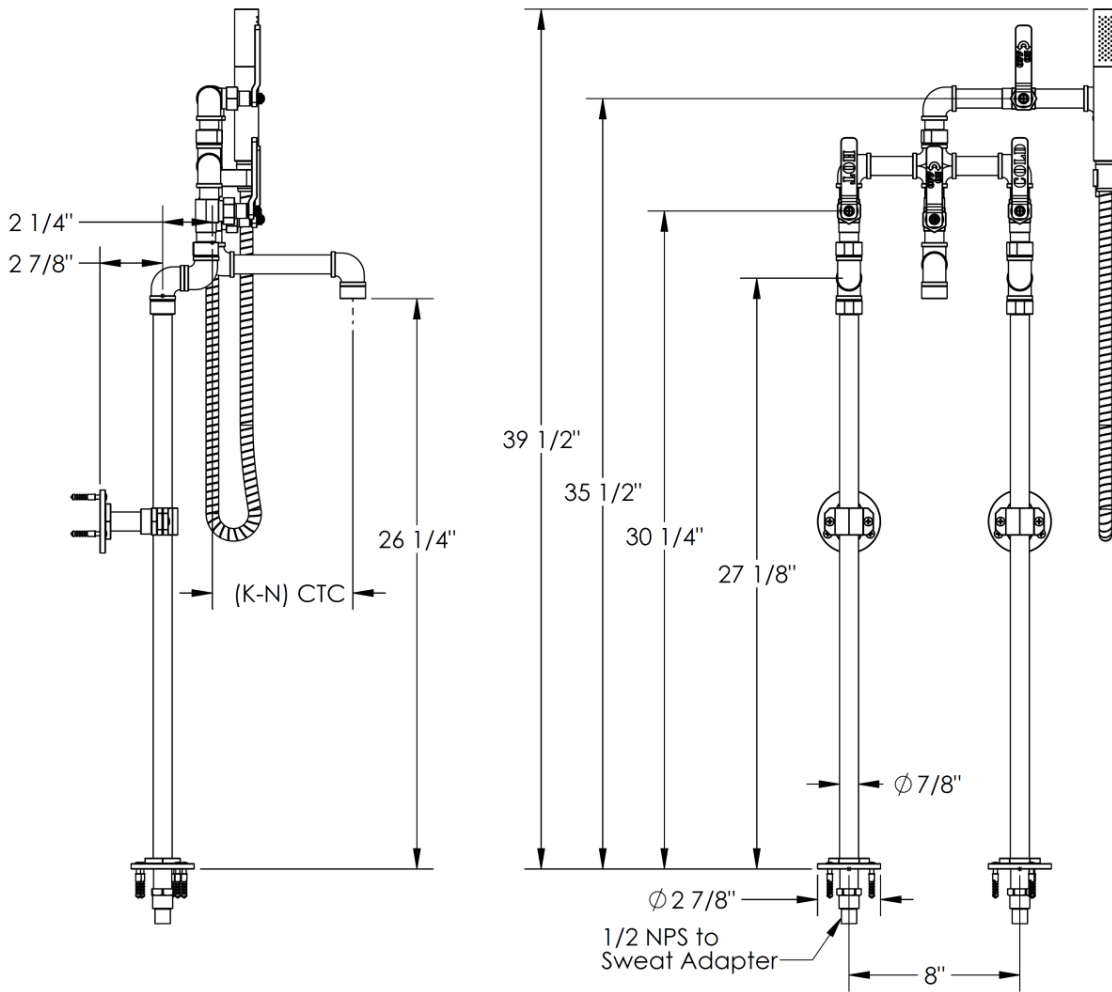

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings"

**WATERMARK DESIGNS 11/14/2014**

350 Dewitt Ave Brooklyn NY 11207 USA T 718 257 2800 F 718 257 2144 info@watermark-designs.com