


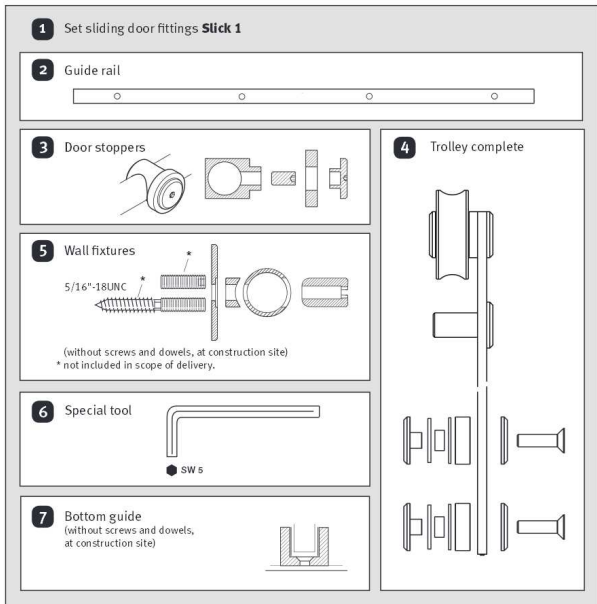

Set Slick 1	Set / Each						
1 Art. No.	2	3	4	5	6	7	
USU94-1800EF	1	2	2	4	1	1	
USU94-2100EF	1	2	2	4	1	1	
USU94-2300EF	1	2	2	5	1	1	
USU94-2540EF	1	2	2	5	1	1	

Beyerle US L.L.C., ABP-Beyerle it's subsidiaries and agents are not responsible or liable for damage or injury to any persons or property due to improper installation of it's products.
All liabilities reside solely with the installer.

ABP **beyerle**

Beyerle US L.L.C.
1294 Logan Circle NW, Atlanta, GA 30318
Phone (404) 350-9738, Fax (404) 355-0166, www.beyerle-us.com


- Attention
- Screw on
- Screw on
- Screw on
- Loosen/Tighten
- Install
- 90° At right angle
- Drill
- Dowels
- Adjust Set
- Level
- Perpendicular
- Measure Mark
- Visual inspection
- Special-tool
- 2 people required
- Measure
- Clarify questions
- See Instructions
- Secure

USJ94, MOIT, USA

Installation instructions

Sliding door fittings **Slick 1**

for glass doors (5/16" - 1/2" thickness)

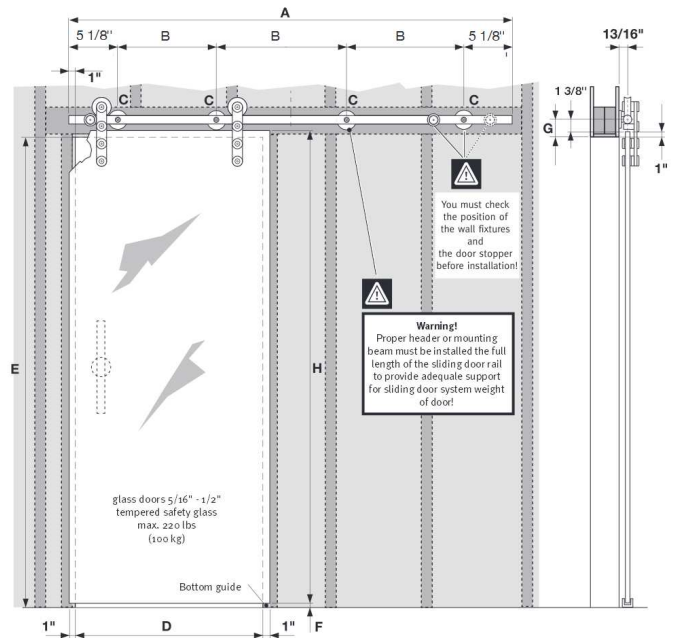

Complete-sets

Set Slick 1 Artikel-No.	A inch	B inch	C Each	D inch	E max. inch	F inch	G inch	H max. inch (H=E-F+1")
USU94-1800EF	70 7/8"	20 1/4"	4	29 1/2" – 35 7/16"	98 7/16"	1/4"–3/8"	2 3/8"	99 1/8"
USU94-2100EF	82 11/16"	24 1/8"	4	35 13/16" – 39 3/8"	98 7/16"	1/4"–3/8"	2 3/8"	99 1/8"
USU94-2300EF	90 9/16"	20 1/16"	5	39 3/4" – 44 1/16"	98 7/16"	1/4"–3/8"	2 3/8"	99 1/8"
USU94-2540EF	100"	22 7/16"	5	44 1/2" – 49 3/16"	98 7/16"	1/4"–3/8"	2 3/8"	99 1/8"

Right to make technical changes reserved - Dimensions in inches - Version 11.2011x
© by ABP-Beyerle GmbH

ABP **beyerle**




Fig. 1




Fig. 3-12




Fig. 4, 5, 6 = 7




Fig. 4




Fig. 5




Fig. 6




Fig. 7




Fig. 8




Fig. 9




Fig. 10




Fig. 11




Fig. 12




Fig. 13




Fig. 14




Fig. 15




Fig. 16




Fig. 17




Fig. 18




Fig. 19




Fig. 20

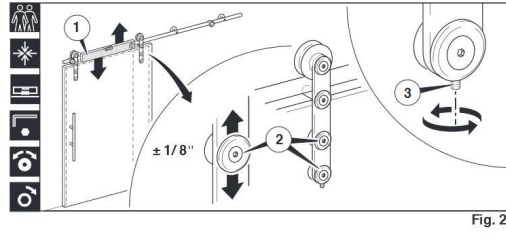


Fig. 21




Fig. 22





Fig. 23

Planning guide

Sliding door fittings 4DL

for glass doors (5/16" - 1/2" thickness)

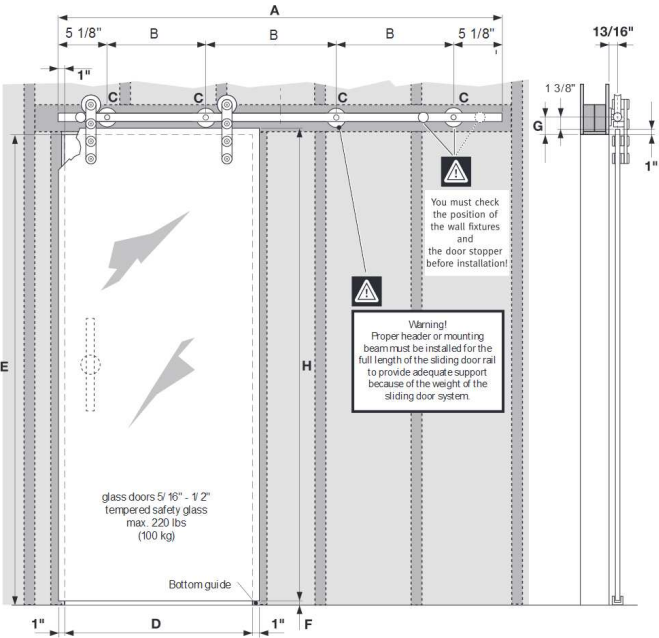


Complete-sets

Set 4DL Artikel-No.	A inch	B inch	C Each	D inch	E max. inch	F inch	G inch	H max. inch (H=E-F+1")
USU94-1800EF	70 7/8"	20 1/4"	4	29 1/2" 35 7/16"	98 7/16"	1/4" 3/8"	2 3/8"	99 1/8"
USU94-2100EF	82 11/16"	24 1/8"	4	35 13/16" 39 3/8"	98 7/16"	1/4" 3/8"	2 3/8"	99 1/8"
USU94-2300EF	90 9/16"	20 1/16"	5	39 3/4" 44 1/16"	98 7/16"	1/4" 3/8"	2 3/8"	99 1/8"
USU94-2540EF	100"	22 7/16"	5	44 1/2" 49 3/16"	98 7/16"	1/4" 3/8"	2 3/8"	99 1/8"


Sliding door fittings 4MD

for glass doors (5/ 16" - 1/ 2" thickness) - 1 glass door

Manufacturing dimensions (special model)													
inches		Each	inches						lbs	Each			
A	B	C	D	D ₁	E	F	G	H	load bearing capacity of the guiderail J	L	M	N	
					max. 98 7/16"	1/4"-3/8"		max. 99 1/8" (H = E - F + Y)					
							2 3/8"				1	2	2

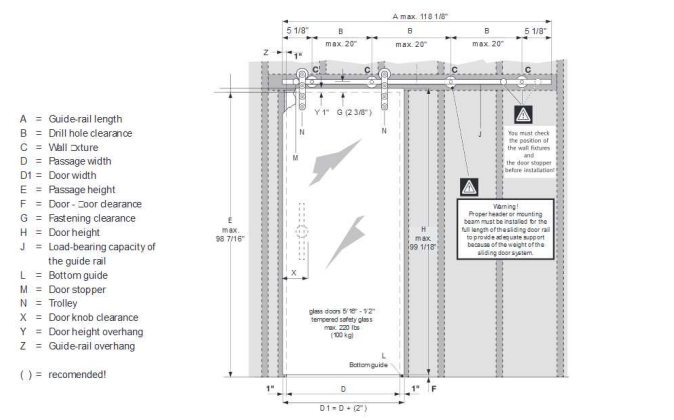

Calculation for guide-rail length A for 1 door

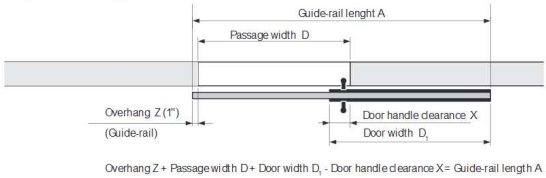


Make door handle clearance so that fingers do not get pinched when the door is used! See page 5.


Sliding door fittings 4DL

for glass doors (5/16" - 1/2" thickness) - 2 glass doors

Manufacturing dimensions (special model)															
inches			Each		inches						lbs	Each			
A	B1	B2	C	D	D ₁	D ₂	E max. 98 7/16"	F 1/4" 3/8"	G	H max. 99 1/8" (H = E - F + Y)	load bearing capacity of the guide rail J	K	L	M	N
									2 3/8"			1	2	4	4

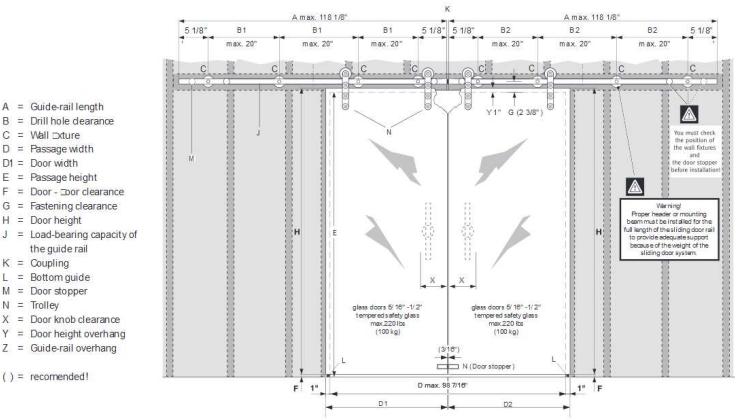

Calculation for total guide-rail length A for 2 doors

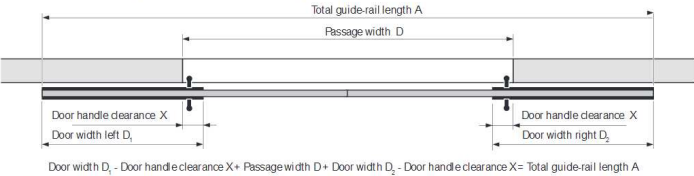


Make door handle clearance so that fingers do not get pinched when the door is used! See page 5


Sliding door fittings 4DL

for glass doors (5/ 16" - 1/ 2" thickness) - Wall texture

Standard installation



Installation with baseboards and trim



* **Compensation discs** 1/16", 3/16" and 3/8"
To compensate for wall unevenness,
order separately.
(Only 1 piece per wall fixture!)


	Art.-No.	inches
	USO216-2EF	1/16"
	USO216-5EF	3/16"
	USO216-10EF	3/8"

** **Spacers** order separately.

	Art.-No.
	USO226-19EF

Sliding door settings 4ML

for glass doors (5/ 16" - 1/ 2") - Preparation of glass door



Make door handle clearance so that fingers do not get pinched when the door is used!

Right to make technical changes reserved - Dimensions in inches - Version 11.2011Y - Page 5 of 6
 © by ABP Beverage GmbH

ABP **beyerle**

Sliding door fittings 4MDL

for glass doors (5/ 16" - 1/ 2" thickness)

Required system parts

Please refer to the catalogue for article no's and models!

A

Guide rail 11 "



A1

Guide rail 11 " for guide rail couplings




N

Trolley complete



C

Wall fixturs




5/ 16" - 18UNC

(without screws and dowels, at construction site)
* not included in scope of delivery.

M

Door stoppers



L

Bottom guide
(without screws and dowels,
at construction site)



K

Guide rail coupling



6

Special tool



SW 5