


SERENITY 1

71 1/4 x 41 3/4 x 24 1/2 (1810 x 1060 x 625)
inches (mm)



Note: Serenity tub only models feature a Pre-leveled ABS Support Base.

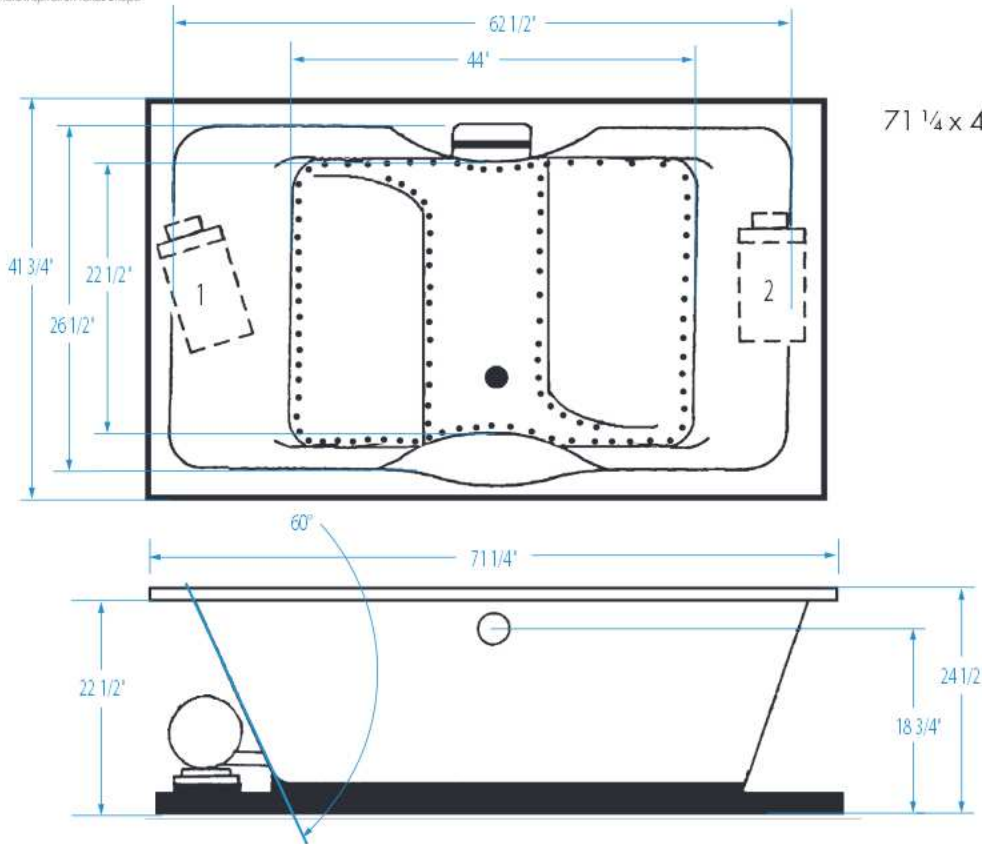

FEATURES lbs (kg) Dimensional Tolerance $\pm 3/8"$; Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt.
Soaker #A11AIR7242TO	Acrylic	-	-	-	-	Center Front	199 (90)
HotSoak #A11AIR7242HS	Acrylic	Water circulation	Pump	1.5 kW Inline maintenance	Electronic on/off	Center Front	229 (104)
Air Bath #A11AIR7242	Acrylic	Air Bath	Variable speed blower	Integrated	Electronic variable	Center Front	229 (104)
DriftBath #A11AIR7242DB	Acrylic	Water circulation	Pump	Integrated	Electronic on/off	Center Front	240 (109)

DIMENSIONS inches (mm)

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
71 1/4 (1810)	41 3/4 (1060)	24 1/2 (625)	-

SUMP DATA inches (mm)

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
90 (341)	-	62 1/2 (1585)	44 (1120)	26 1/2 (675)	22 1/2 (570)

PLUMBING DIMENSIONS inches (mm)

A	B	Drain Diameter / Clearance
6 1/4 (160)	12 3/4 (325)	

ELECTRICAL DATA

Component	Specification	Requirement
Blower/Heater (Air Bath)	10.5 AMP; 120 V	15 AMP; 120V, separate circuit; Class A GFCI
Pump (HotSoak)	1/15 HP; 1.3 AMP; 110 V	20 AMP; 110 V, separate circuit; Class A GFCI
Heater (HotSoak)	1.5 kW; 12.5 AMP; 110 V	
Pump (DriftBath)	3/4 HP; 8.8 AMP; 110 V	15 AMP; 120V, separate circuit; Class A GFCI

NOTES:

- 1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.
- 2) 16 x 20 (405 x 510) minimum access required at pump/blower location(s).
- 3) For Low Profile Deck, framing height will need to be increased by an additional 1".

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.