
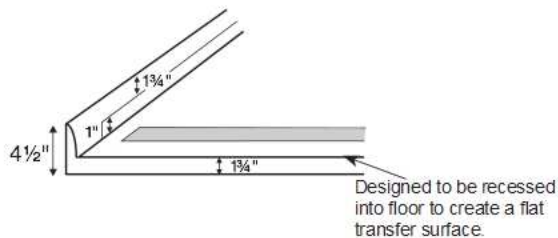


# MTSB-6032BF

59.5" x 32" x 4.5"

Barrier-Free  
Center Drain / Rectangle

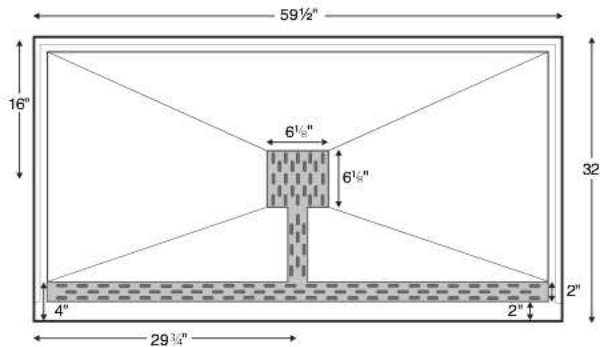

**Standard Colors:** Part # SB6032BF **\$1,853** Choose from:  
White (CWH), Bone (CBN), Biscuit (CBS), Almond (CAL)

**Other Colors:** Part # SB6032BFGRP1 **\$2,099** Choose from:  
Black (CBL), Cashmere (CCM), Ice Gray (CIG), Red (CRED)  
Mexican Sand (CMS), Sandbar (CSB), Sterling Silver (CSS)

Quick Ship/Priority - reduces lead time (QSPRI) Call for availability. **\$299**

## Options

### Drain Kit

PVC (included with shower base)

Solid Brass (SBDKSB) **\$156**

### Drain & Channel Cover

Stainless Steel (standard with any color shower base)

Powder Coated - White\* (DCT60W) No charge upgrade

\*Available for white shower bases only (must specify on order)

Pre-Levelled Foam Base (PLFSB) **\$149** Eliminates the need to wet bed.

Radiance® - shower surface heating system (RAD100) **\$999**

Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor and seated area. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad. For complete information, see p. F-66 or visit [mtibaths.com](http://mtibaths.com).

## Teak Accessories - See sec. D

Teak Shower Seat (various sizes available) **From \$749**

## CONSTRUCTION AND STANDARD FEATURES

- Zero-barrier front threshold designed for ease of transfer between bathroom and shower area.
- Features a unique design that collects the shower water in a concealed trough and channels it to the drain.
- Includes complete drain assembly and one-piece stainless steel drain and channel cover. Also available powder coated in white at no charge (see "Options" above).
- 3-sided integral tile flange to facilitate installation.
- Textured bottom that meets ASTM F-462-1994 certification requirements for safer showering.
- Durable Lucite® cast acrylic shell is extremely scratch- and stain-resistant, yet renewable because the color goes all the way through the material.
- Non-porous surface makes cleaning and sanitizing faster and more effective.
- Multi-layered backing of thick fiberglass / resin / titanium encloses wood reinforcement to prevent flexing of floor pan.
- At least 30% thicker and stronger than other makes.
- Lead time - 5 business days.
- 10-year Limited Residential Warranty.
- Shipping Weight: 115 lbs

SHOWER BASE INSTALLATION: Shower base is designed to be recessed into the floor to create a flat transfer surface. Add bedding compound to fully support bottom of shower base. MTI's optional Pre-Levelled Foam Base requires no additional bedding compound or support. See installation instructions. Measurements are  $\pm 1/2"$  and are subject to change without notice. Data herein supersedes all previous prior to publication date indicated below.

