




Product specifications

- drain, size 9 1/2"
- Swivel spout 360°
- Spout hole diameter 1 1/8"
- Aerator and sprayface function
- Water flow rate limited to max. 1.5 gpm
- Internal backflow preventer
- electronic operating elements (display switch and 2 control knobs)
- hole diameter of display switch and control knob = 1 3/8"
- ready-fit control unit for wall assembly (9 7/8" x 5 3/8" x 2 3/8")
- foot sensor for starting and stopping the water flow without contact, incl. holder
- electronic excenter actuator
- 2 pressure hoses, 3/8 x 1/2 x 19 5/8"
- plug-in power supply, 100-240 V, 50-60 Hz, 18 W, incl. country-specific adaptor set
- low lead compliant

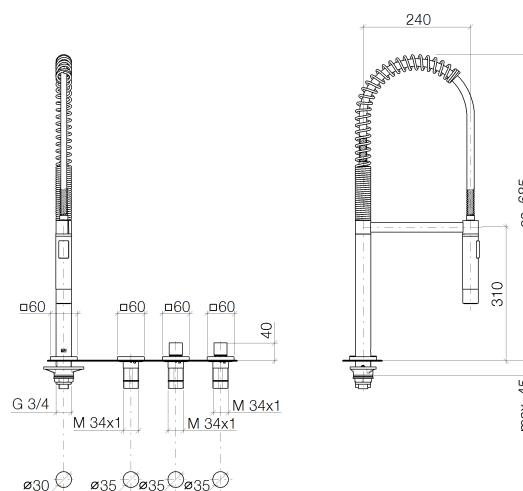

Technical data

- minimum flow pressure = 36 Psi
- maximum flow pressure = 58 Psi

Planning information

- protective circuit breaker recommended
- grounding cable to be provided by the customer

Check with Dornbracht for availability

Surfaces

- chrome 41270875-000010
- matt platinum 41270875-060010

