


**ME by Starck Toilet wall-mounted Duravit Rimless for SensoWash® f # 251009..92**

< 14 3/4" Inch >

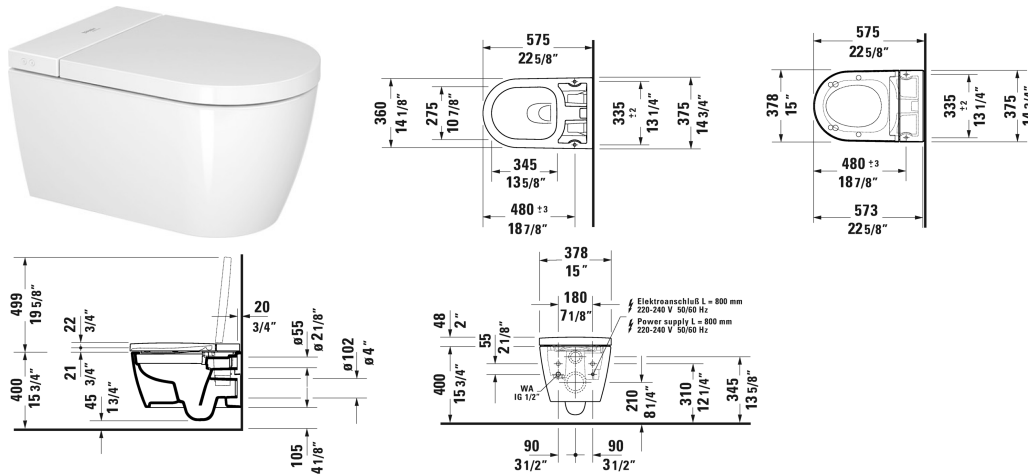

Toilet wall-mounted Duravit Rimless for SensoWash® f	Dimension	Weight	Order number
rimless, washdown model, only in combination with SensoWash f, cUPC® listed*			
<b>Colors</b>			
<b>Variant</b>			
1.28/0.8 gpf	14 3/4" x 22 5/8" Inch	55.1 lb	251009..92
<b>Infobox</b>			
Choose suitable pre-installation kit or connecting set depending on in-wall carrier selection, Wall-mounted toilet is ADA compliant, when installed with a seat height of 17" - 19" from the finished floor, If 2x6" carrier is used, # 005072 is mandatory for SensoWash® installation during rough-in stage, Not available with WonderGliss, In-wall tank & carrier and actuator plate required for installation / Refer to page XXX			
Hardware for wall-mounted bidet and wall-mounted toilet	Ø 1/2" x 7 1/8" Inch	0.4 lb	006500
Noise reduction gasket for wall-mounted toilet		0.7 lb	005064
Pre-installation set in combination with SensoWash, for in-wall carrier with horizontal support without shower toilet pre-installation/conduit pipe			005072
Connecting set in combination with SensoWash Starck f			100731
<b>Suitable products</b>			

**ME by Starck Toilet wall-mounted Duravit Rimless for  
SensoWash® f ♿ # 251009..92**


|< 14 3/4" Inch >|

<p>SensoWash® Starck f Plus shower toilet-seat Rear-, Lady- and Comfortwash, heated seat, warm air dryer, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, night light, Intelligent energy-saving mode, remote control included, app operation, self-cleaning wand, descaling function, automatic drainage in periods of prolonged disuse, 14 7/8" x 22 5/8" Inch</p>	<p>14 7/8" x 22 5/8" Inch</p>	<p>612000</p>
<p>SensoWash® Starck f Lite shower-toilet seat Rear-, Lady- and Comfortwash, heated seat, Intelligent energy-saving mode, warm air dryer, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, automatic drainage in periods of prolonged disuse, descaling function, night light, remote control included, app operation, self-cleaning wand, seat/lid material thermoplastic, 14 7/8" x 22 5/8" Inch</p>	<p>14 7/8" x 22 5/8" Inch</p>	<p>612001</p>

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.*

**SensoWash® Starck f SensoWash® Starck f Lite shower-toilet seat # 612001011041310**

| < 14 7/8" Inch > |

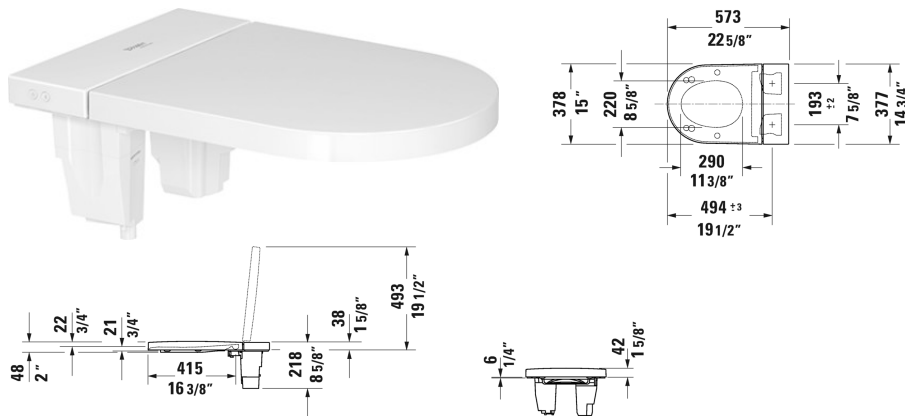

SensoWash® Starck f Lite shower-toilet seat	Dimension	Weight	Order number
Rear-, Lady- and Comfortwash, heated seat, Intelligent energy-saving mode, warm air dryer, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, automatic drainage in periods of prolonged disuse, descaling function, night light, remote control included, app operation, self-cleaning wand, seat/lid material thermoplastic			
<b>Colors</b>			
00 White			
<b>Variant</b>			
AC 100-120V, 50-60 Hz, with visible connections	14 7/8" x 22 5/8" Inch	15.4 lb	612001011041310
<b>Suitable products</b>			
Toilet wall-mounted Duravit Rimless for SensoWash® f rimless, washdown model, only in combination with SensoWash f, cUPC® listed*, 14 3/4" x 22 5/8" Inch	14 3/4" x 22 5/8" Inch		251009
One-Piece toilet Duravit Rimless® for SensoWash® f rimless, syphonic, 12" rough-in, only in combination with SensoWash f, vertical outlet, with holes for external water supply, 1.32/0.92 gpf, 14 1/8" x 29 1/2" Inch	14 1/8" x 29 1/2" Inch		218901

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.