

29 137

GROHTherm® SMARTCONTROL

DUAL FUNCTION THERMOSTATIC VALVE TRIM WITH CONTROL MODULE

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- GROHE StarLight®
- GROHE SmartControl®: push for ON-OFF, turn for volume adjustment from EcoJoy™ to Full Flow, exchangeable symbols
- GROHE TurboStat® compact 3/4" cartridge with wax thermo element
- GROHE SafeStop safety button with manual override at 100°F/38°C
- GROHE SafeStop Plus temperature limiter at 115° F/46° C
- Multiple outlets can be run simultaneously
- 6 1/4" Metal wall escutcheon with GROHE QuickFix®
- 3/8" Thin profile escutcheon
- Wall plate is angle adjustable up to 6°
- Optional flow reducer for CALGreen compliance included (Note: Cannot be used for shower systems that include tub spout)
- Built-in check valve with dirt strainer
- Includes icons to customize push buttons: Hand Shower, Showerhead & Bath Filler
- Includes service stops
- Maximum combined flow performance: 7.7gpm (29L/min) @ 43.5psi (3 bar)
- Requires Grohtherm® Rapido® SmartBox (35 601) (sold separately)



PRODUCT FEATURES:

-  **GROHE StarLight®**
-  **GROHE TurboStat®**
-  **GROHE QuickFix®**
-  **GROHE SmartControl®**
-  **GROHE SafeStopPlus**

CERTIFICATIONS:

- Massachusetts Plumbing Board Approved
- ASSE 1016
- CSA B125.1
- CSA B125.16
- ASME A112.18.1
- ASME A112.1016

AVAILABLE FINISHES:

- 29137000**  GROHE StarLight® Chrome
- 29137A00**  Hard Graphite
- 29137BE0**  Polished Nickel InfinityFinish™
- 29137EN0**  Brushed Nickel InfinityFinish™
- 29137GN0**  Brushed Cool Sunrise

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 12-09-2021

US
Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada
Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.

PART OF **LIXIL**

29 137

GROHTherm® SMARTCONTROL


DUAL FUNCTION THERMOSTATIC VALVE
TRIM WITH CONTROL MODULE

*Pure Freude
an Wasser*



TECHNICAL DATA:

Product Height	6-1/4 in
Product Length	1-11/16 in
Product Width	6-1/4 in

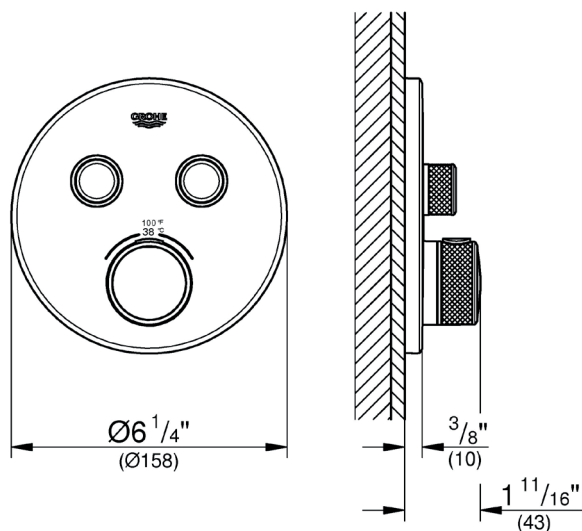

27 412

RELEXA®

6 1/4" SHOWER ARM

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- GROHE StarLight®
- 1/2" NPT Male threads



PRODUCT FEATURES:



GROHE StarLight®

CERTIFICATIONS:

- Massachusetts Plumbing Board Approved
- CSA B125.1
- ASME A112.18.1

AVAILABLE FINISHES:

27412000		GROHE StarLight® Chrome
27412A00		Hard Graphite
27412BE0		Polished Nickel InfinityFinish™
27412EN0		Brushed Nickel InfinityFinish™
27412GN0		Brushed Cool Sunrise

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

Tel: 1.630.582.7711 Fax: 1.630.582.7722
We reserve the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.grohe.us.
10-21-2021

PART OF **LIXIL**

27 412

RELEXA®


6 1/4" SHOWER ARM

*Pure Freude
an Wasser*



TECHNICAL DATA:

Product Height	3-9/16 in
Product Length	4-15/17 in
Product Width	2-9/16 in

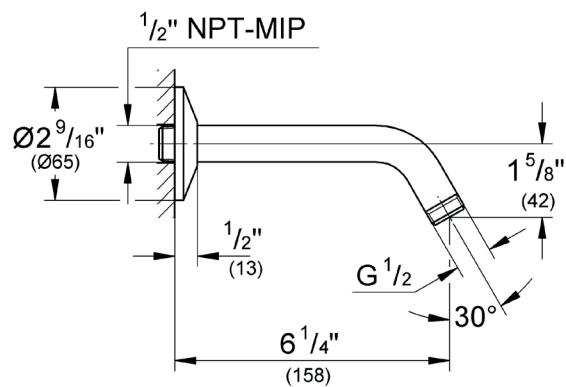

RELEXA
6 5/8" Tubular Shower Arm
MODEL # 27412000

Pure Freude
an Wasser

GROHE



Product Description:

RELEXA


6 5/8" Tubular Shower Arm

Standard Specification:

- GROHE StarLight chrome finish

Color:

□ 27412000 StarLight Chrome

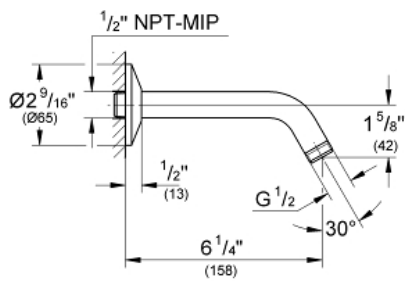

13 274

CONCETTO™

TUB SPOUT

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- GROHE StarLight®
- 6 11/16" Spout reach
- Wall mount
- 1/2" Inlet



PRODUCT FEATURES:



GROHE StarLight®

CERTIFICATIONS:

- Massachusetts Plumbing Board Approved
- Energy Policy Act of 1992
- CSA B125.1
- ASME A112.18.1

AVAILABLE FINISHES:

13274001		GROHE StarLight® Chrome
132742431		Matte Black
13274A01		Hard Graphite
13274EN1		Brushed Nickel InfinityFinish™
13274GN1		Brushed Cool Sunrise

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 04-17-2023

US
Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada
Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.

PART OF **LIXIL**

13 274

CONCETTO™


TUB SPOUT

Pure Freude
an Wasser



TECHNICAL DATA:

Product Height	80 mm
Product Length	187 mm
Product Width	80 mm
Fitting Spout Reach	170 mm

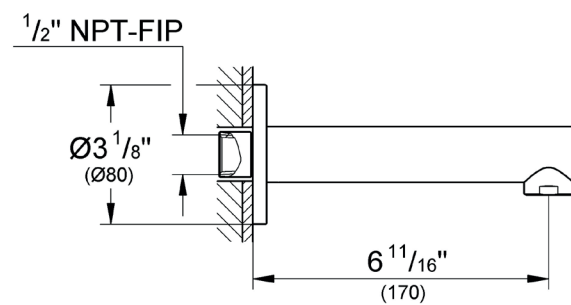

26 043

TEMPESTA® COSMOPOLITAN

100 SHOWER HEAD, 4" - 4 SPRAYS

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- GROHE StarLight®
- GROHE EcoJoy®
- GROHE DreamSpray®
- Speed Clean® anti-lime system
- 4" Face
- 4 Sprays: GROHE Rain O², Rain, Massage, Jet
- 1/2" NPT female threads
- White spray face - Chrome
- Grey spray face - Brushed Nickel
- Rotating ball joint ±15°
- Max. flow rate: 1.75gpm (6.6L/min)



PRODUCT FEATURES:



GROHE StarLight®



GROHE DreamSpray®



GROHE EcoJoy™

CERTIFICATIONS:



- WaterSense
- CEC Certified
- CALGreen Compliant
- Massachusetts Plumbing Board Approved
- Energy Policy Act of 1992
- CSA B125.1
- ASME A112.18.1

AVAILABLE FINISHES:

- | | | |
|-----------|--|--------------------------------|
| 26043001 | | GROHE StarLight® Chrome |
| 260432431 | | Matte Black |
| 26043A01 | | Hard Graphite |
| 26043EN1 | | Brushed Nickel InfinityFinish™ |
| 26043GN1 | | Brushed Cool Sunrise |

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 06-03-2022

US
Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada
Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.

PART OF **LIXIL**

26 043

TEMPESTA® COSMOPOLITAN

100 SHOWER HEAD, 4" - 4 SPRAYS

*Pure Freude
an Wasser*




TECHNICAL DATA:

Product Height 3-5/16 in

Product Length 3-15/16 in

Product Width 3-15/16 in

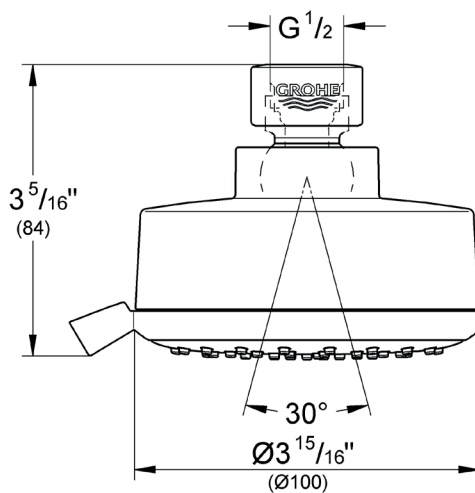

35 601

RAPIDO® SMARTBOX

UNIVERSAL ROUGH-IN BOX

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- 3 Outlets 1/2" female NPT
- 2 Inlets below, 1/2" female NPT
- Installation depth 3"-4 1/8" (75-105mm)
- Connection unit in DR brass
- Includes integrated pre-mounted flushing plug
- Stable built-in box / protective cover
- Leak-proof housing
- Service Stops for maintenance of cartridge included with the trim
- Mounting options for solid walls and dry walls
- Trim sold separately



PRODUCT FEATURES:

CERTIFICATIONS:

- Massachusetts Plumbing Board Approved
- ASSE 1016
- CSA B125.1
- CSA B125.16
- ASME A112.18.1
- ASME A112.1016

AVAILABLE FINISHES:

35601000 No Finish

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 01-21-2022

US

Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada

Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.

PART OF **LIXIL**

RAPIDO® SMARTBOX

UNIVERSAL ROUGH-IN BOX

Pure Freude
an Wasser



TECHNICAL DATA:

Product Height	5-11/16 in
Product Length	4-1/8 in
Product Width	6-15/16 in

