



- Trim parts
- Rain panel with 2 different spray modes
- PURIFY RAIN, 6-7/8" x 6-7/8", flow rate max. 1.8 gpm (at 3 bar)
- FULL RAIN, 17-7/8" x 12-3/8", flow rate max. 1.8 gpm (at 3 bar)
- Descaling system

Technical data:

- Rain panel 23-5/8" x 16-1/2"
- Min. rough in depth 5-7/8"
- Weight 33 lbs
- Supply line (hot/cold): 2 x 3/4"

Electric:

- Ceiling module power supply
- 24V DC (CV)
- Ambient lighting
- Color LED light RGBW
- Lights protected against splashing

Control:

- ZigBee Light Link RGBW Controller

Environment:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.

Technical data:

- Recommended control unit: xTool
- To be provided by the customer: Zigbee Gateway
- Observe the regulations concerning protected zones specified in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Water softening device recommended
- For choosing the drainage, taking into consideration the output of items in the shower, the specific demand needs to be assessed.
- In order to select the optimal device for the hot water tank, the individual demand profile must be determined. This includes other drawing-off points and how frequently the rain panels will be used.
- Dornbracht recommends consulting a systems integrator.

Notes:

To meet the North American plumbing standards, this application must be installed with a diverter (35 203 970-900010, 3-way diverter rough included and required for more restricted states).

To meet the North American plumbing standards, this application must be installed with a diverter (35 203 970-900010, 3-way diverter rough included and required for more restricted states).


	Chrome	41 771 979-00 0010
	Dark Chrome	41 771 979-19 0010
	Brushed Bronze (PVD)	41 771 979-42 0010
	Brushed Dark Bronze (PVD)	41 771 979-43 0010
	Brushed Champagne (22kt Gold)	41 771 979-46 0010
	Champagne (22kt Gold)	41 771 979-47 0010
	Brushed Stainless Steel	41 771 979-86 0010
	Brushed Dark Platinum	41 771 979-99 0010

Required article

	SERENITY SKY Installation rough with light -	35 771 970-900010
	•Rough parts •Diverter trim is sold separately •Flush-mounted reflection box 26-1/8" x 19" RAL 9003 signal white •Pre-assembly kit for three-way diverter included •2x female thread 1/2" connections •Min. rough in depth 5-7/8" •Weight 33 lbs •Connecting cable 27-1/2" •Input 100-240V AC 50-60Hz •Output 24V DC SELV / Class 2 •ZigBee Light Link RGBW Controller •To be provided by the customer: Zigbee Gateway	

41 771 979 Product version from 9/1/2024

mm [inches]
1:10

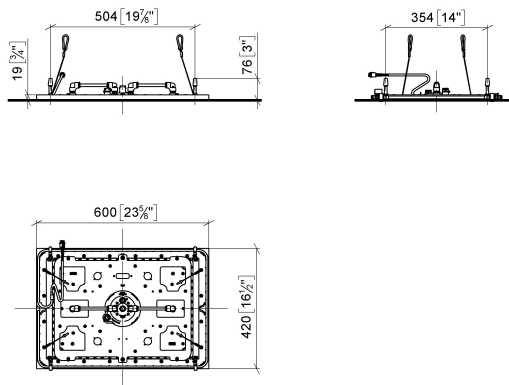

Codes & Standards


EPA WaterSense

WaterSense



Certificates and sustainability

IAPMO_11777

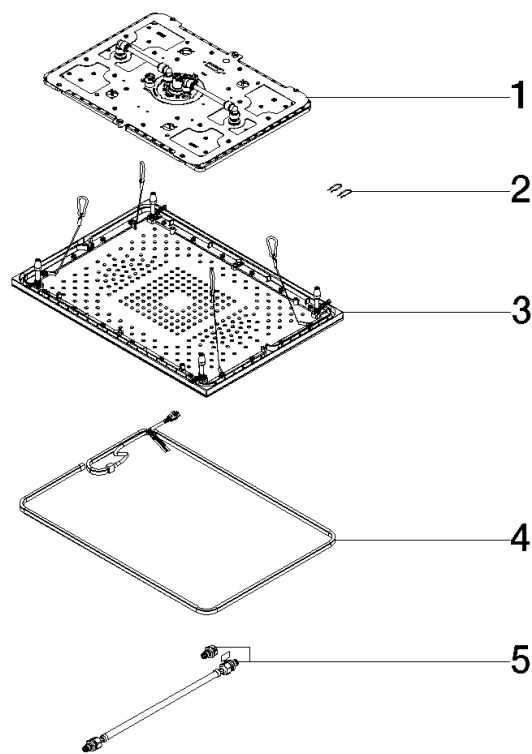

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
3	90 12 05 106 01-00	cover	1.00	10
4	90 10 01 263 00 90	electronic accessories	1.00	2
5	90 30 04 033 01 90	hose	1.00	2
1	90 12 01 095 03 90	shower	1.00	2
2	91 16 02 053 00 90	holder	1.00	2



- concealed rough parts
- flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White
- 2x female thread 1/2" connections
- min. recess depth 150 mm
- max. recess depth 590 mm
- weight 15kg

Separate LED power supply

Input LED power supply

- Electricity supply: 100-240 V AC, 50-60 Hz, 20 W

Output LED power supply

- 24V DC (CV)

Output specification LED power supply

- SELV (Safety Extra Low Voltage)
- Class 2

Ceiling module power supply

- 24V DC (CV)
- Supply pipe 7 m

Activation

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway


Environment


- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.

Pre-assembly kit for three-way diverter included

35 771 970 Product version from 9/1/2024

mm [inches]

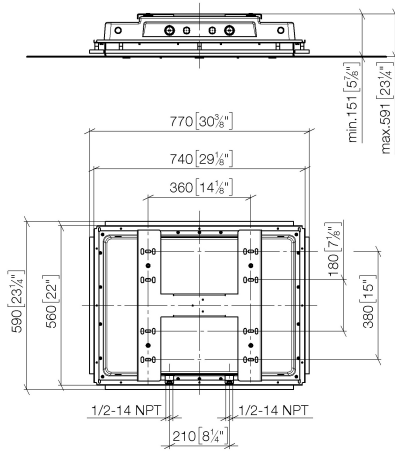

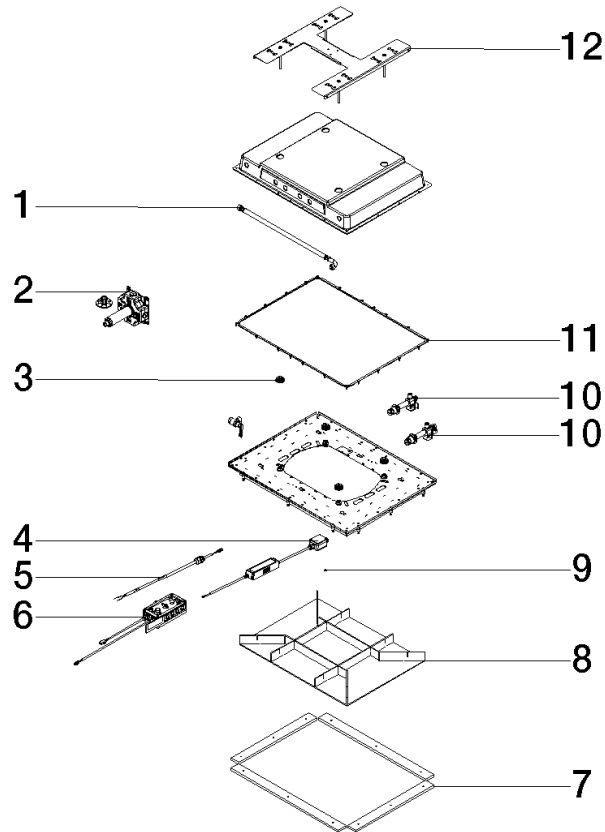

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
5	90 10 01 228 00 90	Cable -	1.00	2
4	90 10 01 262 00 90	LED Power Supply 12V -	1.00	2
9	91 30 30 194 00 90	Mounting Cylinder head screw Set Quantity 10 M4 x 6 mm -	1.00	2
3	91 31 20 530 00 90	Nipple Set Quantity 10 -	1.00	2
10	90 17 20 308 00 90	Connection without lug for Serenity Sky -	2.00	2
12	90 17 20 304 00 90	Mounting with ceiling fixing for Serenity Sky 1 Stück -	1.00	2
1	90 30 04 099 00 90	Tube Overhead shower with nipple for Serenity Sky 1/2" x 1/2" x 600 mm -	1.00	2
7	90 18 30 020 00 90	Adapter Spacer ring, rain shower for Serenity Sky -	1.00	2
6	90 10 01 264 00 90	RGBW Controller System box for Serenity Sky -	1.00	2
2	90 17 01 263 00 90	Diverter -	1.00	2
8	90 91 42 195 01 90	Cover for Serenity Sky -	1.00	2
11	90 14 03 194 00 90	Washer Cylinder head screw -	1.00	2

36 514 979 Product version from 4/1/2024



- AQUAPRESSURE FLOW, max. flow rate 10 l/min (at 3 bar)
- water jet adjustable
- Function from: l/min

Technical data:

- cover plate 120 x 60 mm
- 1/2" connection

Notes:

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Chrome	36 514 979-00
	Brushed Platinum	36 514 979-06
	Platinum	36 514 979-08
	Dark Chrome	36 514 979-19
	Light Gold	36 514 979-26
	Brushed Light Gold	36 514 979-27
	Brushed Durabronze (23kt Gold)	36 514 979-28
	Matte Black	36 514 979-33
	Brushed Dark Brass	36 514 979-39
	Brushed Bronze	36 514 979-42
	Brushed Champagne (22kt Gold)	36 514 979-46
	Champagne (22kt Gold)	36 514 979-47
	Brushed Chrome	36 514 979-93
	Brushed Dark Platinum	36 514 979-99


Recommended miscellaneous

- Concealed wall elbow -** 35 085 970 90
- min. recess depth 90 mm
 - max. recess depth 163 mm




36 514 979 Product version from 4/1/2024



mm [inches]

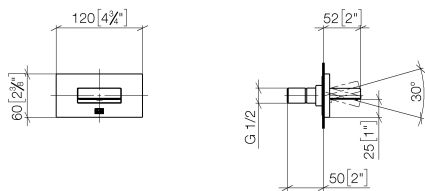


Flow rate chart

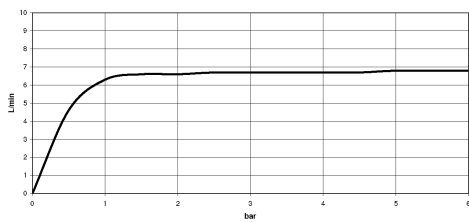

Trajectory diagram

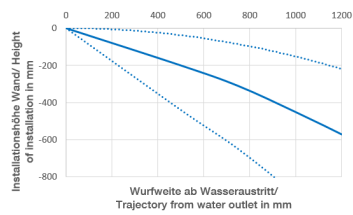

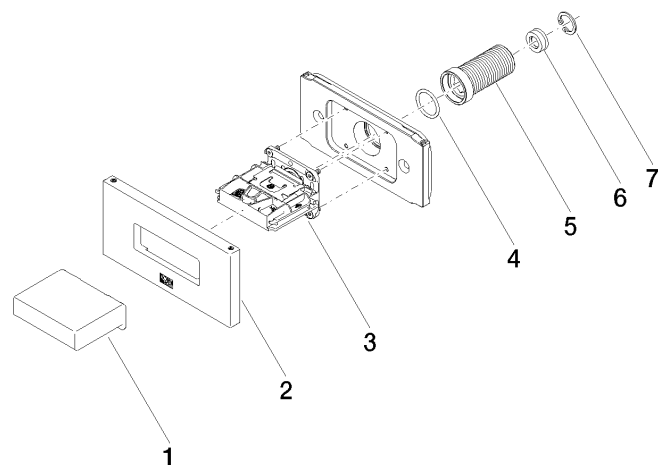


Spare parts list


No.	Item Number	Name	Quantity used	Delivery time
5	09 24 04 336 90	nipple	1.00	2
3	90 29 03 088 00 90	insert	1.00	2
1	09 17 01 230-00	casing	1.00	10
7	09 16 01 014 90	ring	1.00	2
6	09 23 01 134 90	flow reducer	1.00	2
2	90 27 97 041 00-00	rosette	1.00	10
4	90 14 10 010 00 90	seal	1.00	2

Bathtub - Concealed rough parts
 Rough-in adapter -
 Article number: 35 080 970-90 0010

- 1/2" male NPT x 1/2" female straight



Dimensional drawing

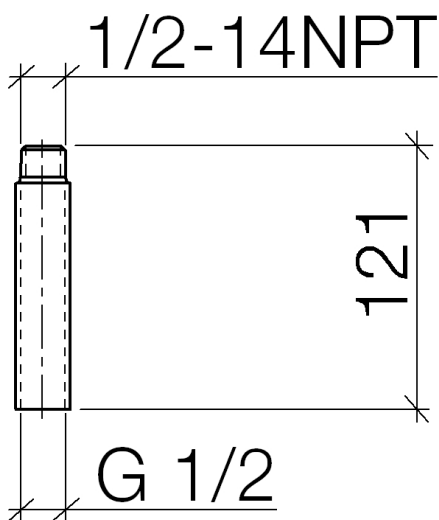

All dimensions in mm / inch = mm x 0,0394



Bathtub - Concealed rough parts
Rough-in adapter -
Article number: 35 080 970-90 0010



Bathtub - Concealed rough parts
Rough-in adapter -
Article number: 35 080 970-90 0010

Spare parts list

Number	Item Number	Designation	Number of units
--------	-------------	-------------	-----------------



WATER FAN vertical Body spray - Brushed Platinum

SERIES-VARIOUS

36 513 979 Product version from 10/1/2023



- AQUAPRESSURE FLOW, max. flow rate 1.8 gpm (at 3 bar)
- Adjustable jet

Technical data:

- Cover plate 9-1/2" x 2-3/8"
- 1/2" connection

Notes:

- This product reduces water consumption by 28% (compared to requirements of EPAct '92)
- This product contributes to meeting the requirements of the LEED® Green Building Rating
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Platinum	36 513 979-06 0010
	Chrome	36 513 979-00 0010
	Platinum	36 513 979-08 0010
	Dark Chrome	36 513 979-19 0010
	Light gold	36 513 979-26 0010
	Brushed Light Gold	36 513 979-27 0010
	Brushed Durabrass (23kt Gold)	36 513 979-28 0010
	Matte Black	36 513 979-33 0010
	Brushed Dark Brass	36 513 979-39 0010
	Brushed Bronze	36 513 979-42 0010
	Brushed Champagne (22kt Gold)	36 513 979-46 0010
	Champagne (22kt Gold)	36 513 979-47 0010
	Brushed Chrome	36 513 979-93 0010
	Brushed Dark Platinum	36 513 979-99 0010

Required article



Rough -

- Max. rough in depth 6-3/4"
- Min. rough in depth 3-7/8"

35 206 970-90 0010

Recommended article



xGRID Mounting bracket for drywall construction -

12 340 970 90

Required article



xGRID Installation track 21.85" - 12 360 970 90




WATER FAN vertical Body spray - Brushed Platinum

SERIES-VARIOUS

36 513 979 Product version from 10/1/2023

mm [inches]

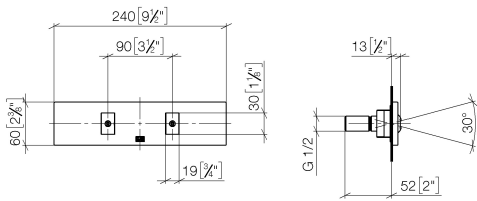


Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC
----------------	------------------------------------	------

Certificates and sustainability

IAPMO_4976 (

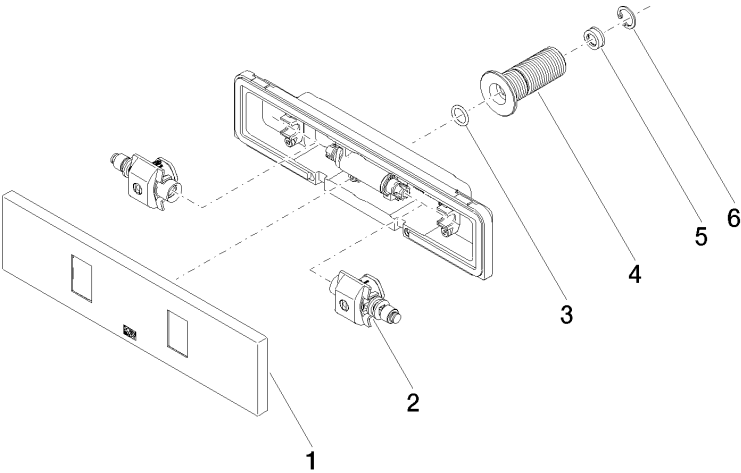

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
6	09 16 01 014 90	ring	1.00	2
2	90 31 10 013 00 90	insert	1.00	2
5	09 23 01 165 90	flow reducer	1.00	2
3	09 14 10 003 90	seal	1.00	2
1	90 27 99 002 00-06	insert	1.00	10
4	09 24 05 015 90	nipple	1.00	2



SKU: 36512979

Dornbracht

Specifications Currently Unavailable

35 206 970




- female thread 1/2" connection
- Mud guard
- Water protection

NOTE: Important for certain series! Due to minimum rough-in requirements, a framing of 2x6 studs may be needed.

35 206 970

mm [inches]

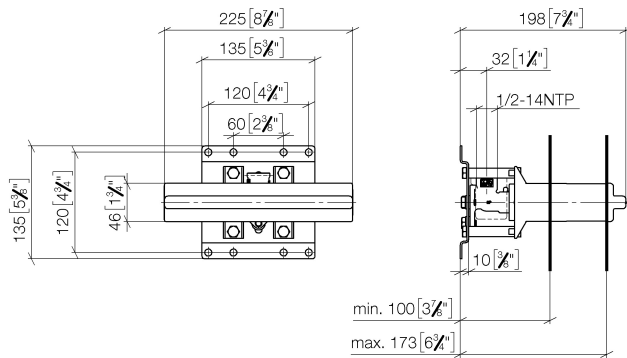


Codes & Standards

ASME A112.18.1

cUPC

Certificates and sustainability

IAPMO_4976 (

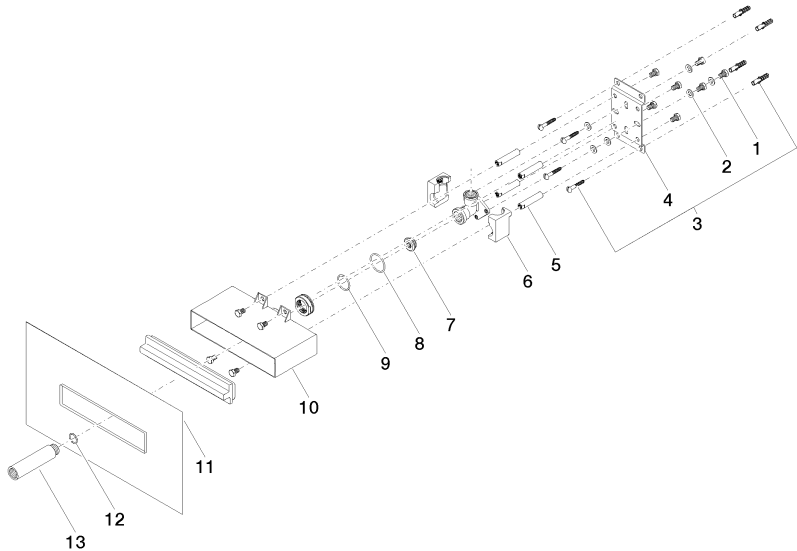



Spare parts list

Number	Item Number	Designation	Number of units	Lead time
4	09 17 20 094 90	holder	1.00	2
5	09 18 40 138 90	sleeve	1.00	60
7	04 31 20 006 00 90	plug	1.00	2
1	09 30 30 152 90	screw	11.00	2
11	04 14 03 126 00 90	gasket kit	1.00	2
10	09 11 11 053 90	accessories	1.00	60
8	09 14 10 149 90	seal	1.00	2
6	09 11 11 036 90	accessories	1.00	2
3	04 30 31 024 01 90	fixing set	2.00	2
13	09 24 03 169 10 90	adaptor	1.00	2
2	09 30 11 139 90	disc	6.00	2
9	09 14 10 118 90	seal	1.00	2
12	90 14 10 010 00 90	seal	1.00	2



Product specifications


- Hand shower with descaling system and back flow preventer
 - 3/8" shower outlet
 - Hand shower bracket
 - Flange 2 3/8 x 2 3/8"
 - 3/8" x 1/2" x 49 1/4" shower hose with rotating hose connector
 - 1/2" wall elbow with back flow preventer
 - Total height 9 1/2"
 - Water flow rate limited to max. 2 gpm
- Internal backflow preventer.

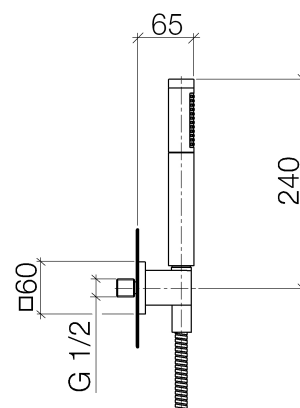

Surfaces


- | | |
|-----------------|-------------|
| • chrome | 27808980-00 |
| • matt platinum | 27808980-06 |

Exploded assembly drawing

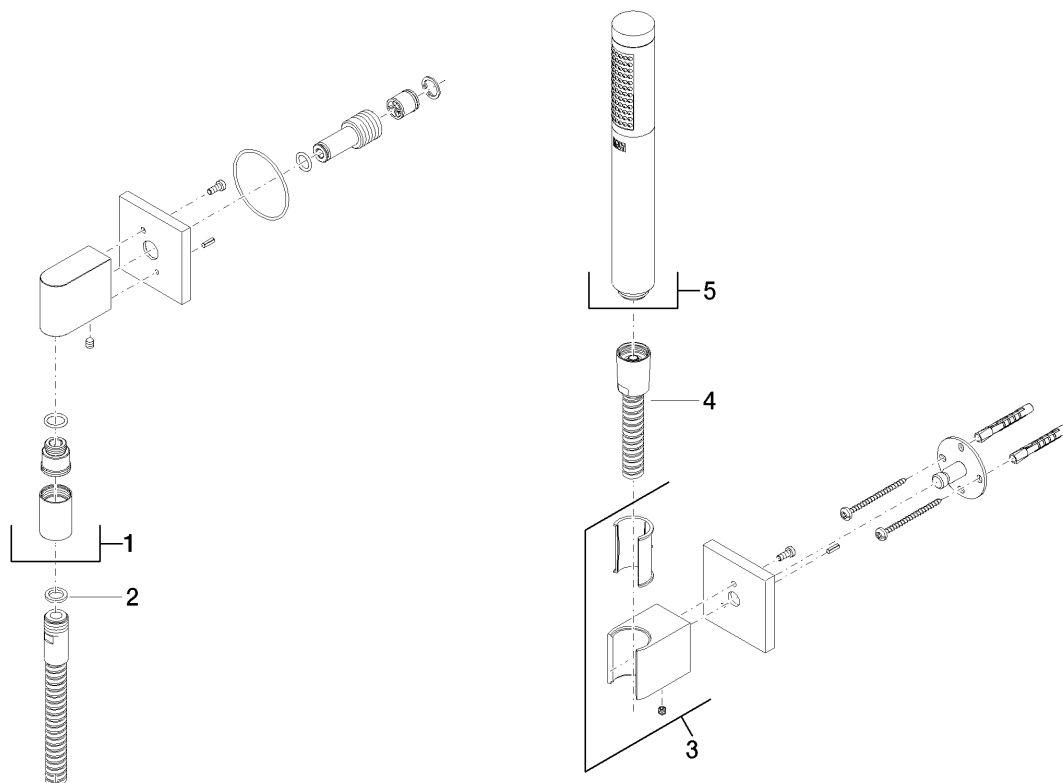

Order quantity

No.	Article number	Name	Installation quantity
1	28450980ff	connection	1
2	09142002690	seal	1
3	28050980ff	holder	1
4	093002072ff	hose	1
5	28010979ff	shower	1

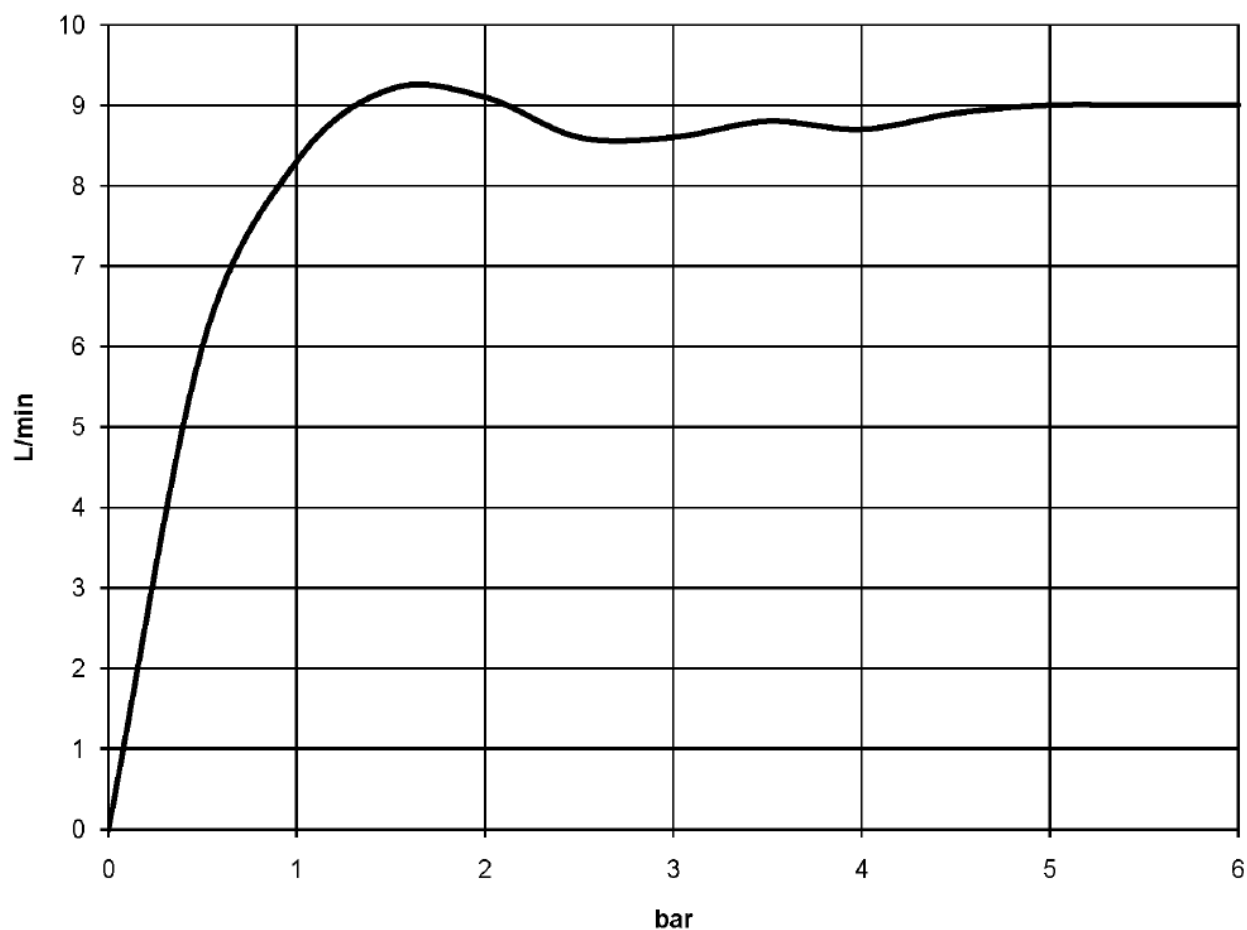




Product specifications

Exposed trim parts only, rough to be ordered separately

- Flange 4 3/4 x 4 3/4"
- Temperature control handle with safety lock 100.4 °F

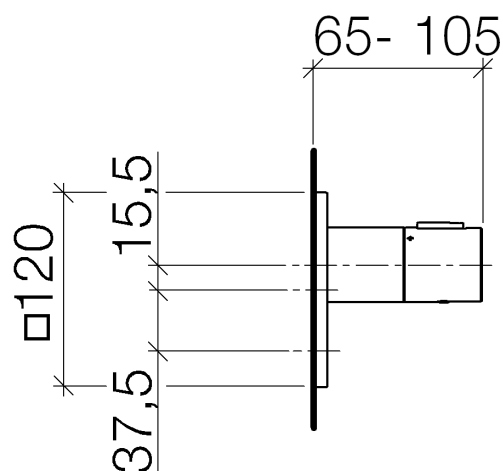


Surfaces

- | | |
|-----------------|-------------|
| • chrome | 36416780-00 |
| • matt platinum | 36416780-06 |
| • platinum | 36416780-08 |

Accessories required


- Rough for xTool thermostat without volume control; 35517970


Exploded assembly drawing

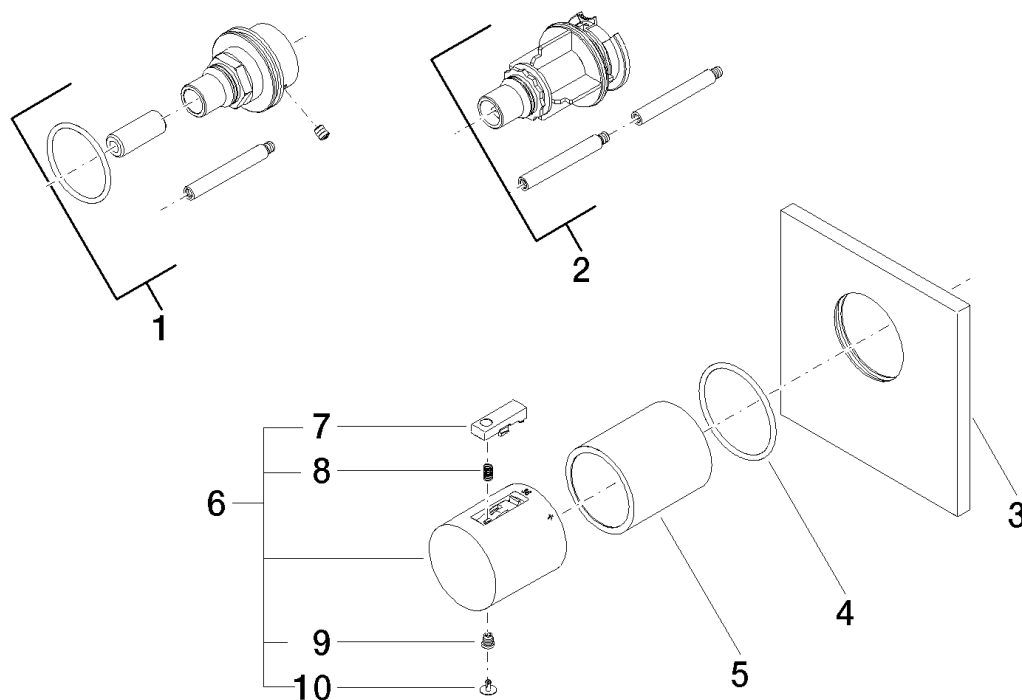

Order quantity

No.	Article number	Name	Installation quantity
1	1217797090	Extension 28mm Thermostat	1
2	1217897090	xTOOL (concealed rough parts)	1
3	091102196ff	extension	1
4	09141004990	cover	1
5	092102112ff	seal	1
6	04173300401ff	sleeve	1
7	092133010ff	handle	1
8	09160202790	handle	1
9	09303013690	spring	1
10	093120049ff	screw	1
		plug	1

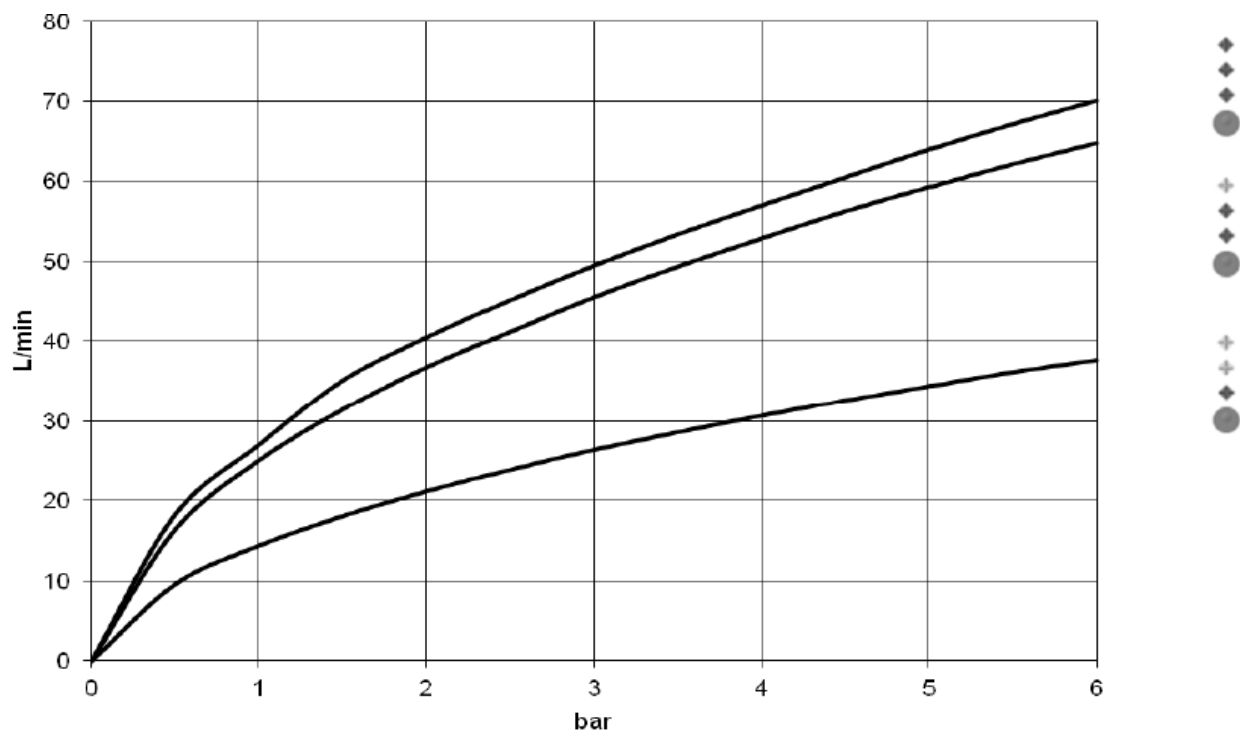

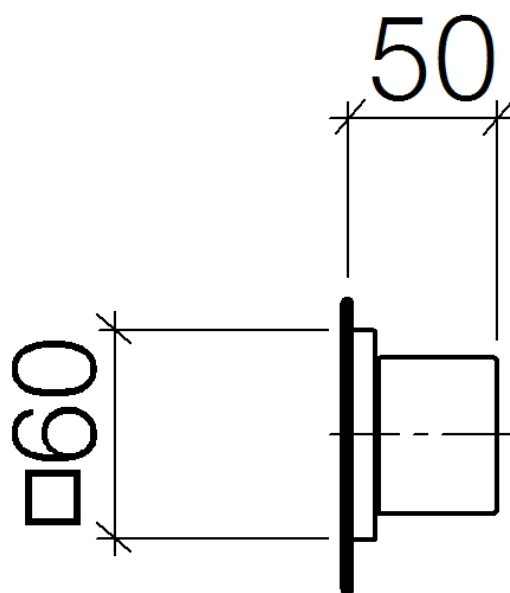

Article number: 36310782



Order quantity

No.	Article number	Name	Installation quantity
1	09210210890	disc	1
2	90207800202ff	handle	1



Shower - FM products


xTOOL Concealed thermostat rough with three volume controls -
: 35 547 970-90 0010



- 2x Shaft and sleeve can be cut to length
- 2x back flow preventer
- 2x Water protection
- 3x Mud guard
- 1/2" connection
- brass, lead free
- Sound insulation
- Center to center 4-3/4"
- Thermostat cartridge
- Integrated supply stops
- 2x connections 3/4" (hot/cold)
- NOTE: Important for certain series! Due to minimum rough-in requirements, a framing of 2x6 studs is needed.



Dimensional drawing

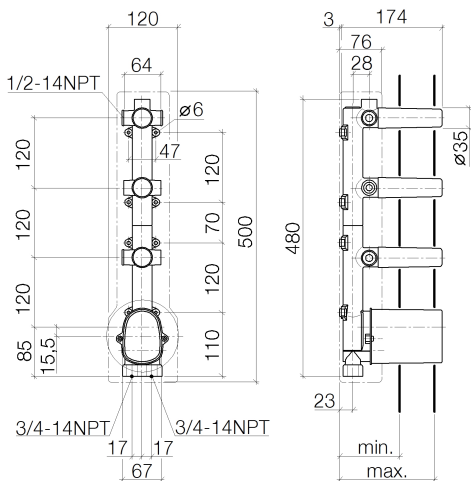

Source	min	max
Circle	80	110
Lulu	80	110
Madison	80	110
Madison Flair	80	110
TARA LOGIC	80	110
Meta.02	80	110
Soul	80	110
Square	80	110
Cut	80	110
L'Aura	80	110
Domicil	85	110
Just	80	155
LaFleur	95	160
SUPERNOVA	95	160
Symetria	95	160
VEOLIE	95	160
Tara	95	160
MEM	115	156
CL1	115	156



Shower - FM products

xTOOL Concealed thermostat rough with three volume controls -

: 35 547 970-90 0010

Recommended article



12 177 970 90

Extension 1-1/8" -



12 178 970 90

Extension 1-3/4" -





Bathtub - Concealed rough parts

Rough for volume control 1/2" -

Article number: 35 607 970-90 0010


- brass, lead free
- female thread 1/2" connection
- 1x outlet 1/2"
- Mud guard
- Water protection
- Sound insulation



Discontinued items available to order until 31.12.9999

Dimensional drawing

mm [inches]

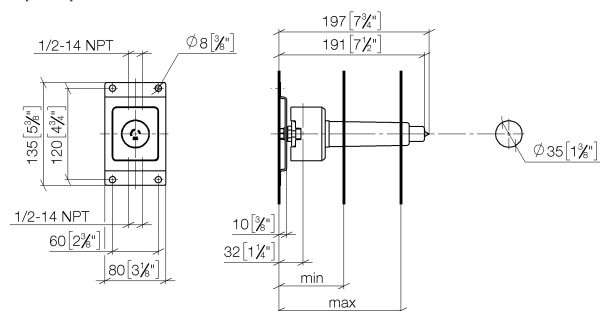


Serie	min	max
Madison	75 [3"]	145 [5 3/4"]
Madison Flair	75 [3"]	145 [5 3/4"]
Lulu	75 [3"]	145 [5 3/4"]
Vaia	75 [3"]	145 [5 3/4"]
Symetrics	75 [3"]	145 [5 3/4"]
Tara	85 [3 3/8"]	145 [5 3/4"]
Deque	85 [3 3/8"]	145 [5 3/4"]
CL1	105 [4 1/8"]	150 [5 7/8"]
Mem	105 [4 1/8"]	150 [5 7/8"]

All dimensions in mm / inch = mm x 0,0394



Bathtub - Concealed rough parts
Rough for volume control 1/2" -
Article number: 35 607 970-90 0010

Flow rate chart

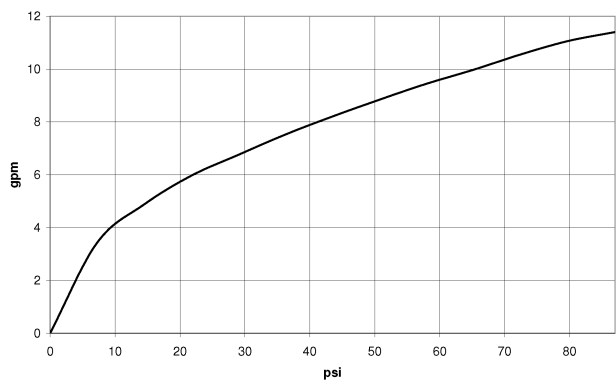


Other surface finishes

More custom finish options are available via special production (xTra Service). Please see our finish matrix for availability and pricing or contact a Dornbracht representative.

Bathtub - Concealed rough parts
 Rough for volume control 1/2" -
 Article number: 35 607 970-90 0010

Spare parts list

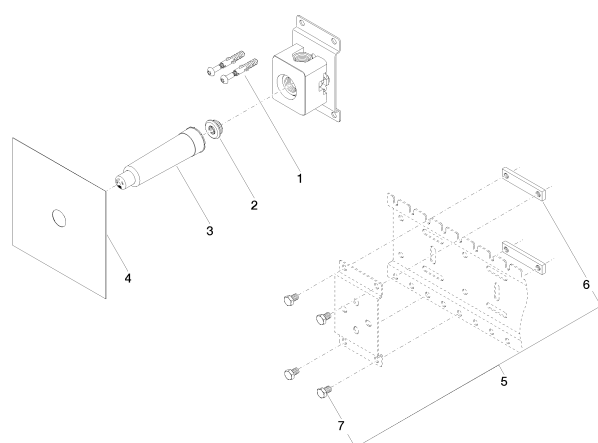

Number	Item Number	Designation	Number of units
1	04 30 31 024 01 90	fixing set	2
2	04 31 20 006 00 90	plug	1
3	09 21 02 173 90	cap	1
4	04 14 03 072 00 90	gasket kit	1
5	04 17 20 100 00 90	fixing set	1
6	09 17 20 100 90	holder	2
7	09 30 30 152 90	screw	4