

29 137

GROHTHERM® SMARTCONTROL

DUAL FUNCTION THERMOSTATIC VALVE TRIM WITH CONTROL MODULE

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- GROHE StarLight®
- GROHE SmartControl®: push for ON-OFF, turn for volume adjustment from EcoJoy™ to Full Flow, exchangeable symbols
- GROHE TurboStat® compact 3/4" cartridge with wax thermo element
- GROHE SafeStop safety button with manual override at 100°F/38°C
- GROHE SafeStop Plus temperature limiter at 115° F/46° C
- Multiple outlets can be run simultaneously
- 6 1/4" Metal wall escutcheon with GROHE QuickFix®
- 3/8" Thin profile escutcheon
- Wall plate is angle adjustable up to 6°
- Optional flow reducer for CALGreen compliance included (Note: Cannot be used for shower systems that include tub spout)
- Built-in check valve with dirt strainer
- Includes icons to customize push buttons: Hand Shower, Showerhead & Bath Filler
- Includes service stops
- Maximum combined flow performance: 7.7gpm (29L/min) @ 43.5psi (3 bar)
- Requires Grohtherm® Rapido® SmartBox (35 601) (sold separately)



PRODUCT FEATURES:

-  **GROHE StarLight®**
-  **GROHE TurboStat®**
-  **GROHE QuickFix®**
-  **GROHE SmartControl®**
-  **GROHE SafeStopPlus**

CERTIFICATIONS:

- Massachusetts Plumbing Board Approved
- ASSE 1016
- CSA B125.1
- CSA B125.16
- ASME A112.18.1
- ASME A112.1016

AVAILABLE FINISHES:

- 29137000**  GROHE StarLight® Chrome
- 29137A00**  Hard Graphite
- 29137BE0**  Polished Nickel InfinityFinish™
- 29137EN0**  Brushed Nickel InfinityFinish™
- 29137GN0**  Brushed Cool Sunrise

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 12-09-2021

US
Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada
Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.

PART OF **LIXIL**

29 137

GROHTHERM® SMARTCONTROL


DUAL FUNCTION THERMOSTATIC VALVE
TRIM WITH CONTROL MODULE

*Pure Freude
an Wasser*



TECHNICAL DATA:

Product Height	6-1/4 in
Product Length	1-11/16 in
Product Width	6-1/4 in

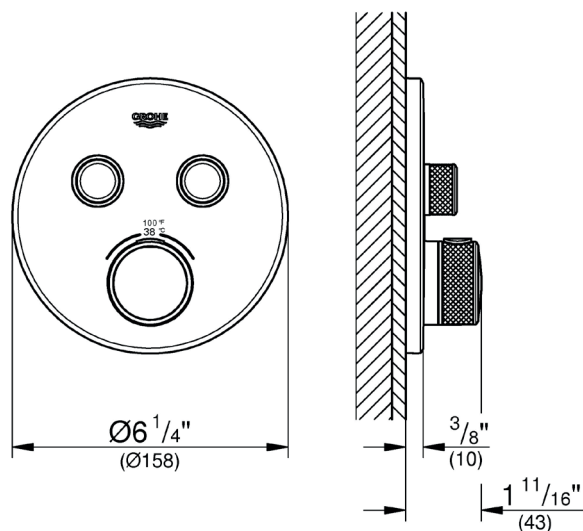

27 412

RELEXA®

6 1/4" SHOWER ARM

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- GROHE StarLight®
- 1/2" NPT Male threads



PRODUCT FEATURES:



GROHE StarLight®

CERTIFICATIONS:

- Massachusetts Plumbing Board Approved
- CSA B125.1
- ASME A112.18.1

AVAILABLE FINISHES:

27412000		GROHE StarLight® Chrome
27412A00		Hard Graphite
27412BE0		Polished Nickel InfinityFinish™
27412EN0		Brushed Nickel InfinityFinish™
27412GN0		Brushed Cool Sunrise

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

Tel: 1.630.582.7711 Fax: 1.630.582.7722

We reserve the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.grohe.us.

10-21-2021

PART OF **LIXIL**

27 412

RELEXA®


6 1/4" SHOWER ARM

*Pure Freude
an Wasser*



TECHNICAL DATA:

Product Height	3-9/16 in
Product Length	4-15/17 in
Product Width	2-9/16 in

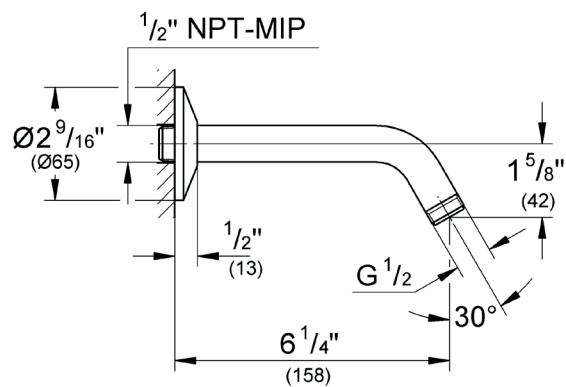

RELEXA
6 5/8" Tubular Shower Arm
MODEL # 27412000

Pure Freude
an Wasser

GROHE



Product Description:

RELEXA


6 5/8" Tubular Shower Arm

Standard Specification:

- GROHE StarLight chrome finish

Color:

□ 27412000 StarLight Chrome

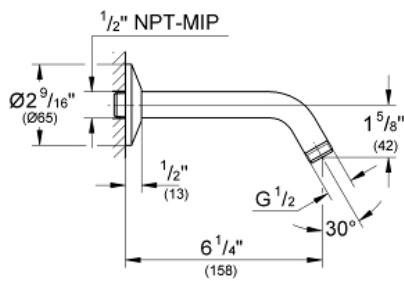


NEW TEMPESTA
COSMOPOLITAN 100
Head shower 4 sprays
MODEL # 26043

Pure Freude an Wasser



GROHE America, Inc | 200 North Gary Avenue, Suite G, Roselle, IL 60172
Phone: +1 (800) 444-7643 | Fax: +1 (800) 225-2778 | us-customerservice@grohe.com

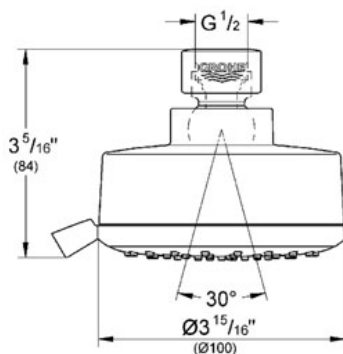

Product Description:
Head shower 4 sprays

Standard Specification:

- GROHE StarLight® finish
- GROHE DreamSpray® perfect spray pattern
- GROHE EcoJoy® technology for less water and perfect flow
- SpeedClean anti-lime system
- Inner WaterGuide for a longer life
- GROHE Rain O2, Rain
- Rotating ball joint $\pm 15^\circ$
- Suitable for instantaneous heater
- Blister pack
- Min. recommended pressure 14.5 PSI
- Max Flow Rate: 2.0 gpm
- Massage, Jet

Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1

Color:

- ☐ 26043 000 chrome
- ☐ 26043 EN0 Brushed Nickel

26 465

SENA

STICK HAND SHOWER - 1 SPRAY

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- GROHE StarLight®
- GROHE DreamSpray®
- GROHE EcoJoy®
- Speed Clean® anti-lime system
- 1 Spray: Non-adjustable wide spray
- Metal hand shower
- Inner WaterGuide for a longer life
- Max. flow rate: 1.75gpm (6.6L/min)
- Optional Adaptor Elbow (28 389) (sold separately)



PRODUCT FEATURES:



GROHE StarLight®



GROHE DreamSpray®

CERTIFICATIONS:



- WaterSense
- CEC Certified
- CALGreen Compliant
- Massachusetts Plumbing Board Approved
- Energy Policy Act of 1992
- CSA B125.1
- ASME A112.18.1

AVAILABLE FINISHES:

26465000



GROHE StarLight® Chrome

26465A00



Hard Graphite

26465EN0



Brushed Nickel InfinityFinish™

26465GN0



Brushed Cool Sunrise

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 10-03-2022

US
Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada
Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.

PART OF **LIXIL**

26 465

SENA


STICK HAND SHOWER - 1 SPRAY

*Pure Freude
an Wasser*



TECHNICAL DATA:


Product Height	8-7/16 in
Product Length	1/2 in
Product Width	1/2 in
GPM (Min)-GPM (Max)	1.75 gal (US)/min

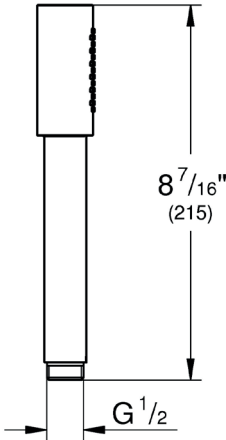

SENA STICK
Hand Shower
MODEL # 26465000

Pure Freude
an Wasser

GROHE



Product Description:
SENA STICK
Hand Shower

Standard Specification:

- 1 Spray: Normal
- Metal
- GROHE EcoJoy 1.75 gpm (6.6 l/min) flow limiter
- GROHE DreamSpray perfect spray pattern
- GROHE StarLight chrome finish
- SpeedClean anti-lime system
- Inner WaterGuide for a longer life
- Universal mounting system (fits all standard shower hoses)
- Suitable for instantaneous heater
- Min. recommended pressure: 15 psi (1.0 bar)

Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1
- US Federal and State material regulations
- EPA WaterSense®

Color:

- 26465000 StarLight Chrome

27 074

RAINSHOWER™

WALL MOUNT HAND SHOWER HOLDER

*Pure Freude
an Wasser*



STANDARD SPECIFICATION:

- GROHE StarLight®



PRODUCT FEATURES:



GROHE StarLight®

CERTIFICATIONS:



- CEC Certified
- CSA B125.1
- ASME A112.18.1

AVAILABLE FINISHES:

27074000		GROHE StarLight® Chrome
270742430		Matte Black
27074A00		Hard Graphite
27074EN0		Brushed Nickel InfinityFinish™
27074GN0		Brushed Cool Sunrise

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 06-03-2022

US
Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada
Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.

PART OF LIXIL

27 074

RAINSHOWER™

WALL MOUNT HAND SHOWER HOLDER

*Pure Freude
an Wasser*




TECHNICAL DATA:

Product Height 1-15/16 in

Product Length 2-11/16 in

Product Width 1-15/16 in

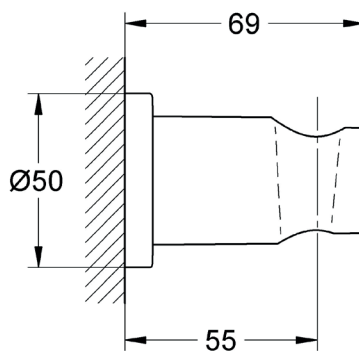

26 635

RAINSHOWER™

WALL UNION

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- GROHE StarLight®
- 1/2" NPT threads
- Check valve included to prevent backflow



PRODUCT FEATURES:



GROHE StarLight®

CERTIFICATIONS:

- CSA B125.1
- ASME A112.18.1

AVAILABLE FINISHES:

26635000		GROHE StarLight® Chrome
266352430		Matte Black
26635A00		Hard Graphite
26635EN0		Brushed Nickel InfinityFinish™
26635GN0		Brushed Cool Sunrise

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 06-03-2022

US
Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada
Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.

PART OF **LIXIL**

26 635

RAINSHOWER™


WALL UNION

Pure Freude
an Wasser



TECHNICAL DATA:

Product Height	1-15/16 in
Product Length	2-1/2 in
Product Width	1-15/16 in

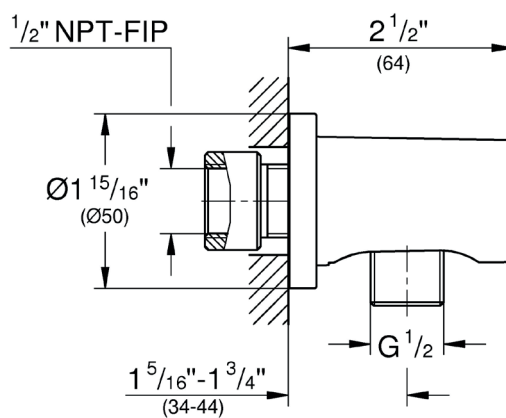

35 601

RAPIDO® SMARTBOX

UNIVERSAL ROUGH-IN BOX

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- 3 Outlets 1/2" female NPT
- 2 Inlets below, 1/2" female NPT
- Installation depth 3"-4 1/8" (75-105mm)
- Connection unit in DR brass
- Includes integrated pre-mounted flushing plug
- Stable built-in box / protective cover
- Leak-proof housing
- Service Stops for maintenance of cartridge included with the trim
- Mounting options for solid walls and dry walls
- Trim sold separately



PRODUCT FEATURES:

CERTIFICATIONS:

- Massachusetts Plumbing Board Approved
- ASSE 1016
- CSA B125.1
- CSA B125.16
- ASME A112.18.1
- ASME A112.1016

AVAILABLE FINISHES:

35601000 No Finish

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 01-21-2022

US

Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada

Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.

PART OF **LIXIL**

RAPIDO® SMARTBOX


UNIVERSAL ROUGH-IN BOX

Pure Freude
an Wasser



TECHNICAL DATA:

Product Height	5-11/16 in
Product Length	4-1/8 in
Product Width	6-15/16 in

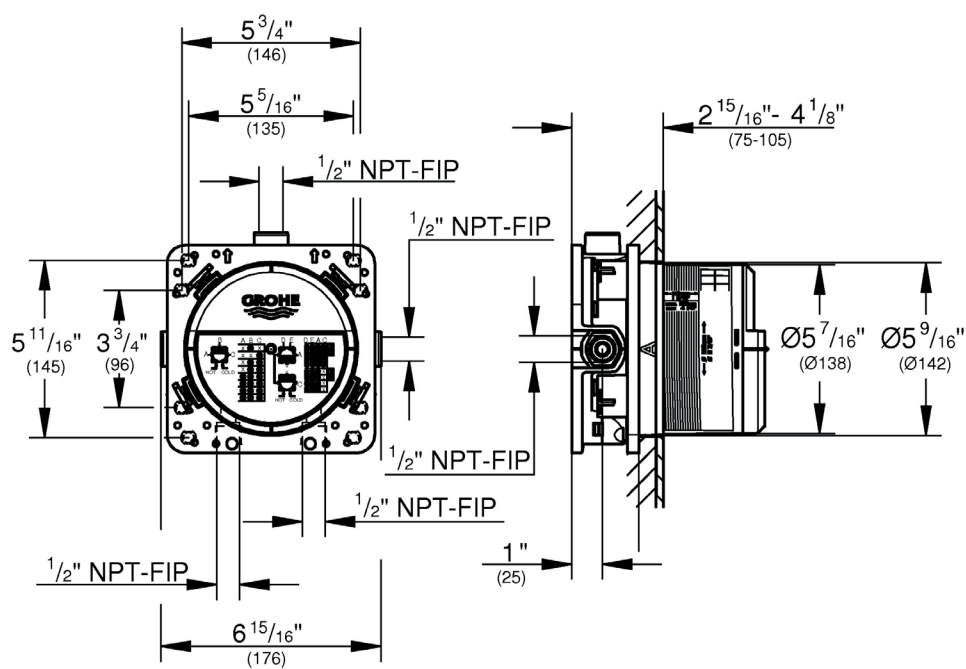

26 994

UNIVERSAL


59" METAL TWIST-FREE SHOWER HOSE

*Pure Freude
an Wasser*



STANDARD SPECIFICATION:

- 59" Long
- Metal hose
- Tensile strength 500 N
- Pressure resistance: up to 14.5psi (16 bar)
- Heat resistance 165°F
- AntiFold bend proof
- 1/2" NPT female threads
- Rotation cone for Twist-free function
- Silicone strip prevents hand shower from turning while in body spray position



PRODUCT FEATURES:

CERTIFICATIONS:



- ADA
- Massachusetts Plumbing Board Approved
- CSA B125.1
- ASME A112.18.1

AVAILABLE FINISHES:

269942430  Matte Black

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 10-05-2022

US
Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada
Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.

PART OF LIXIL

26 994

UNIVERSAL

59" METAL TWIST-FREE SHOWER HOSE

*Pure Freude
an Wasser*



TECHNICAL DATA:

Product Height	23 mm
Product Length	1,500 mm
Product Width	23 mm

