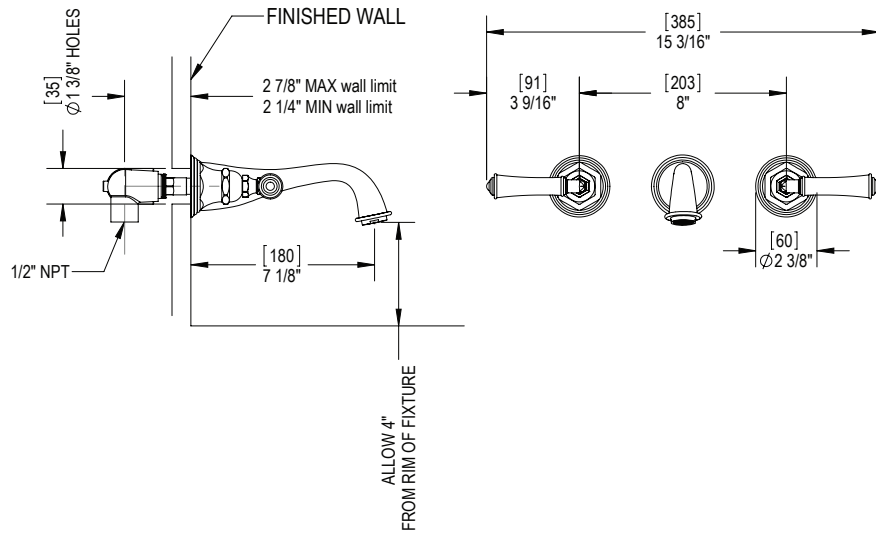


FEATURES:

- Brass construction with choice of 21 finishes
- Two Cross or Lever handles
- Quarter-turn ceramic disk cartridges
- 1.5 gpm @ 60 psi (Helps meet CalGreen regulation)

APPROVAL:

- AB1953 / NSF61
- ASME A 112.18.1
- CSA B125.1

**CONTACT US:**


If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com

150528**THE Rubinet** FAUCET COMPANY**ASSEMBLY INSTRUCTION****1GRVJL or C****WALL MOUNT LAVATORY SET****1GRVJL****1GRVJC****REMOVAL OF FAUCET:**

Always turn the water supply off before removing the existing faucet or disassembling a valve. Open both faucet handles to relieve water pressure and to ensure that the water has been successfully turned off.


CARE OF FAUCET:

The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.

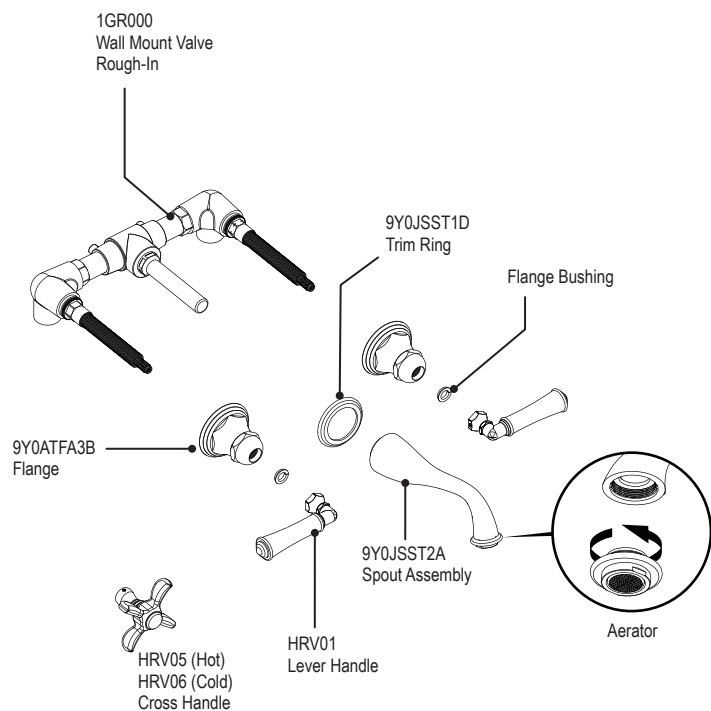


5


HANDLE ALIGNMENT (1G)

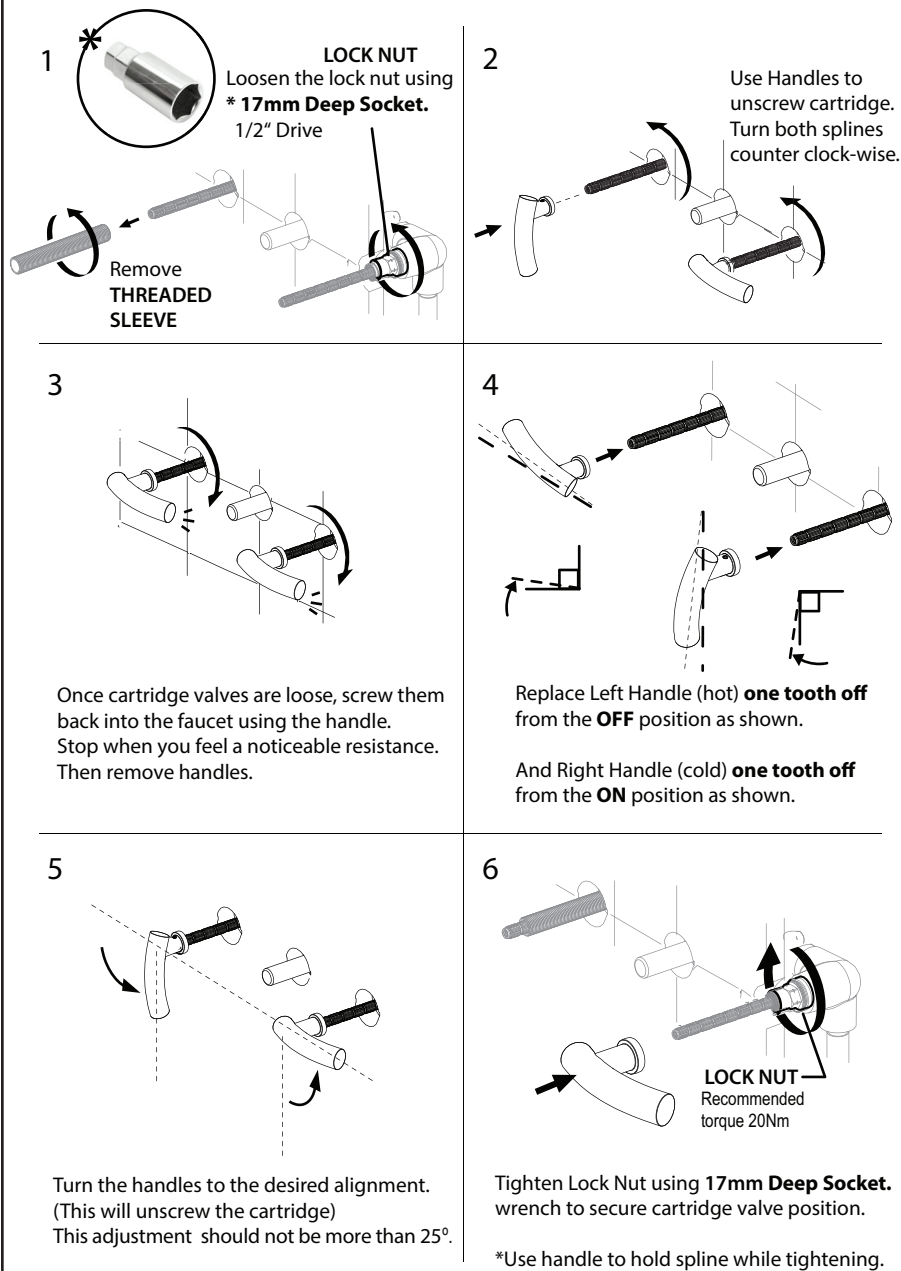

4


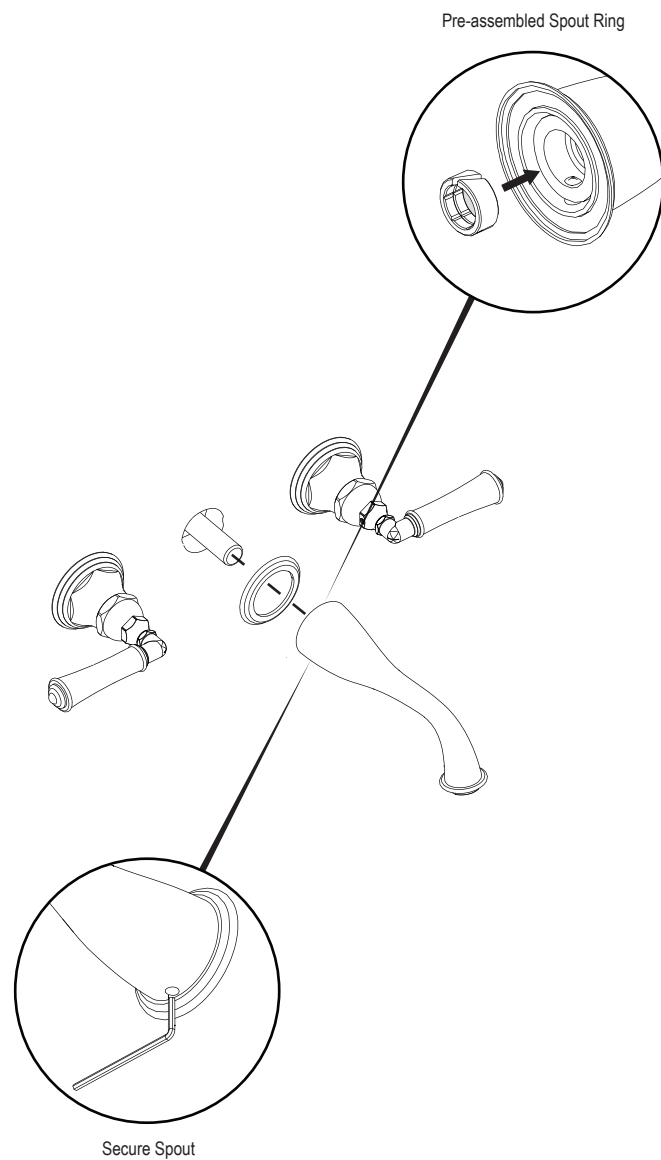


1

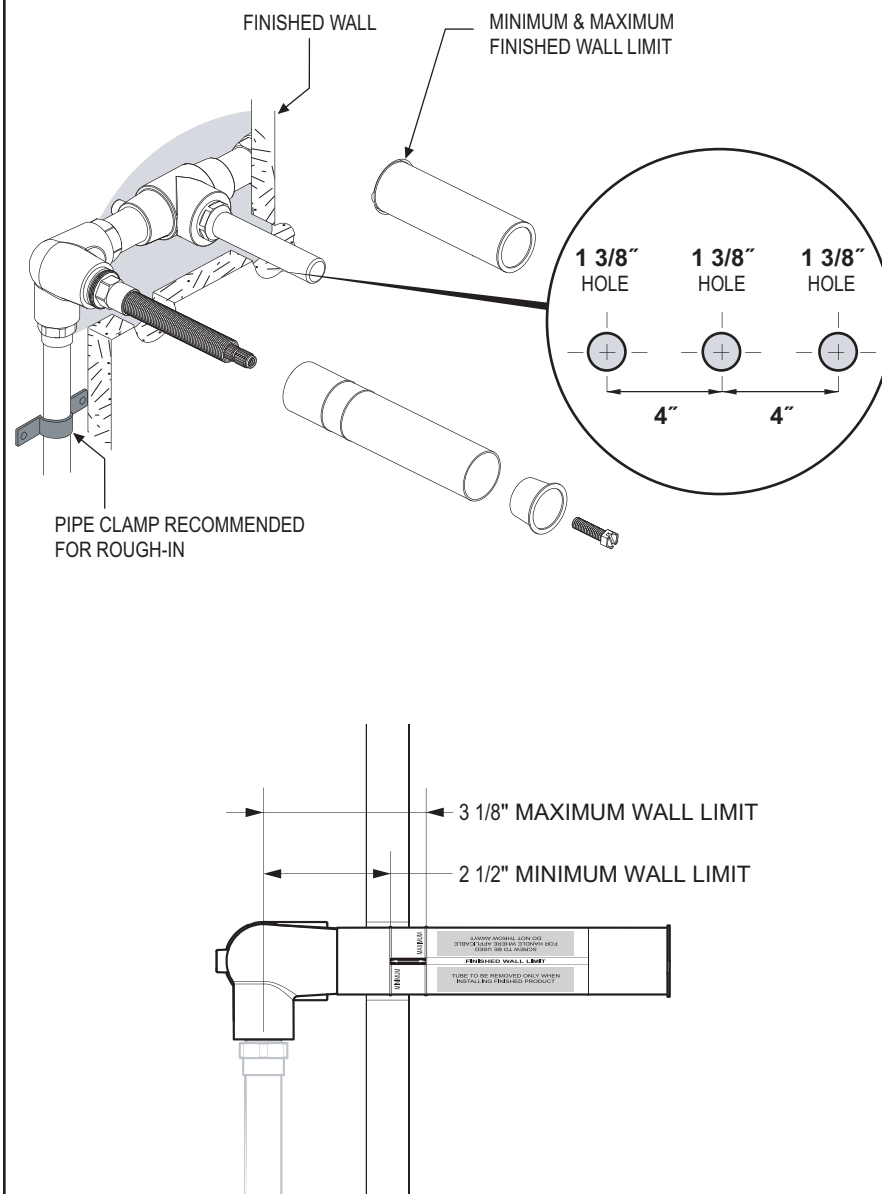


*Must refer to the maximum and minimum wall limit guide. The valves must be secured to ensure proper trim installation.

2

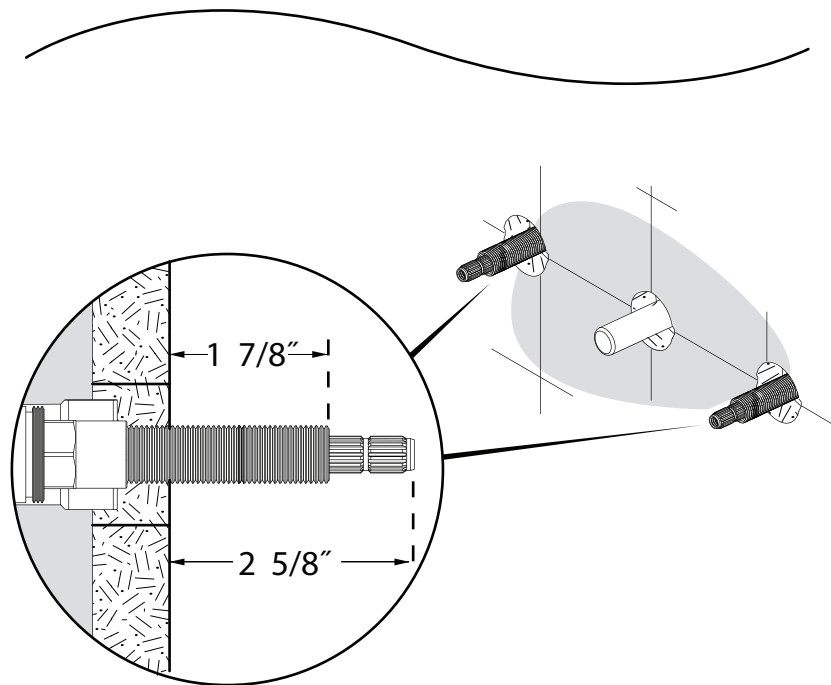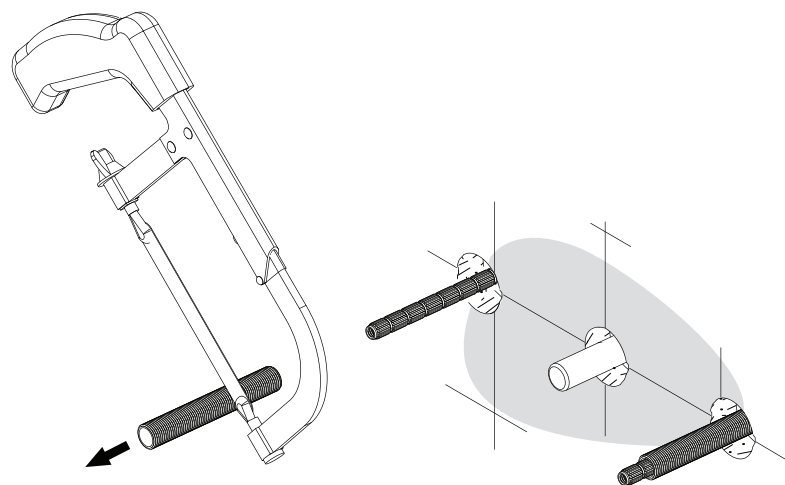


* Mark each Threaded Sleeve 1 7/8" (47.5 mm) from the finished wall. Also mark the Cartridge Splines 2 5/8" (66.5 mm) from the finished wall. Cut both sleeves and splines as marked.


3

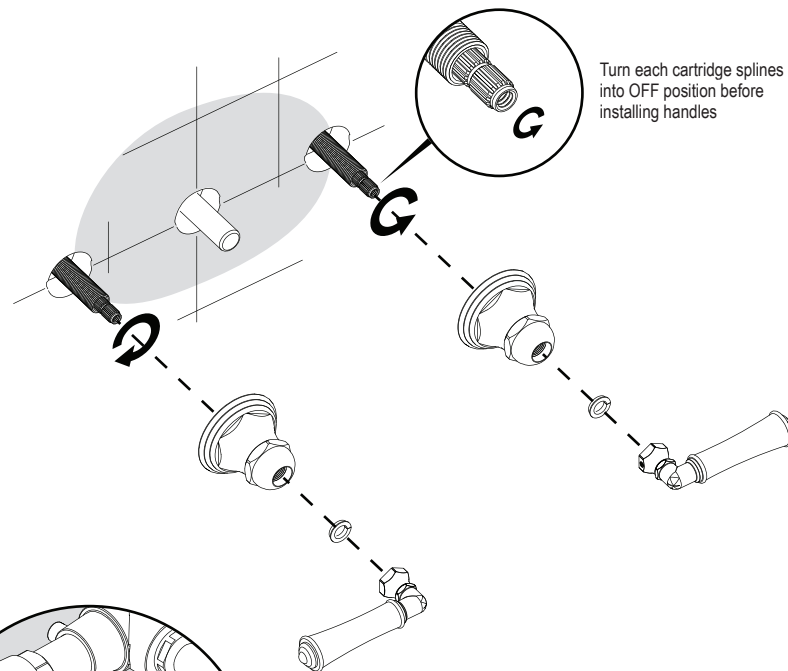

Turn each cartridge splines into OFF position before installing handles



*** IF THE HANDLES DO NOT ALIGN AS REQUIRED**
you can adjust them. Please refer to the "Handle Alignment" instruction at the back.

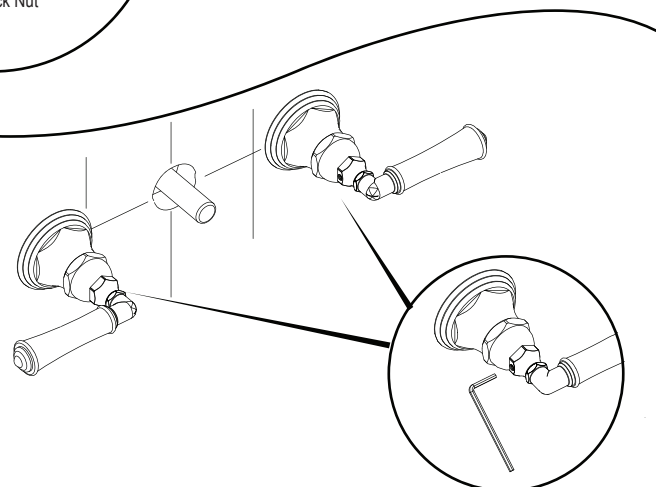

Secure Handles