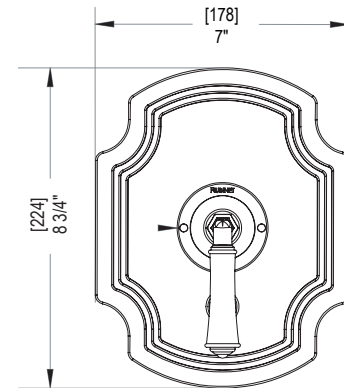
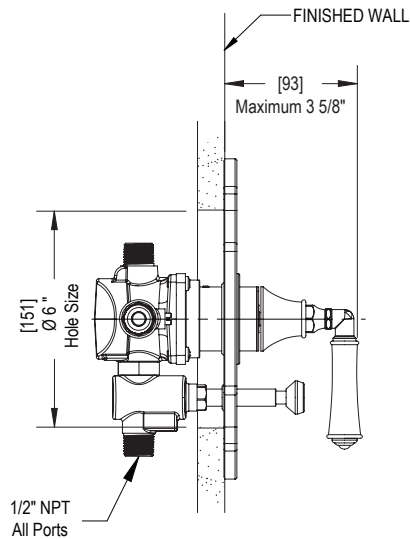
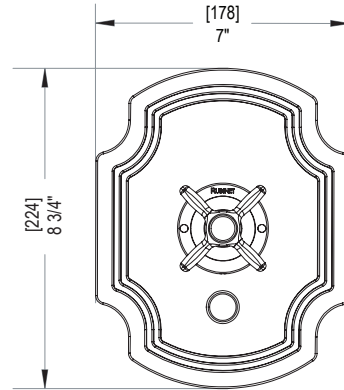
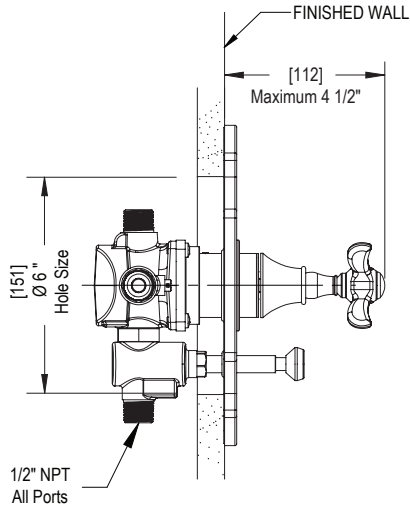


FEATURES:



- Brass construction with choice of 21 finishes
- Single Control cycles from Cold to Hot
- High temperature Limit Stop
- 20psi Minimum - 125 psi Maximum operating pressure
- Flow Rate
- Tub: 5.8 gpm @ 45psi
- Shower: 4.6 gpm @ 45psi

APPROVAL:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016

**CONTACT US:**



If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com

161031**THE Rubinet** FAUCET COMPANY**ASSEMBLY INSTRUCTION****2YRVL or C****VALVE ONLY PRESSURE BALANCE TUB & SHOWER****2YRVL****2YRVC****REMOVAL OF FIXTURE:**

Always turn the water supply off before removing the existing faucet or disassembling a valve. Open both faucet handles to relieve water pressure and to ensure that the water has been successfully turned off.


CARE OF FIXTURE:

The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.

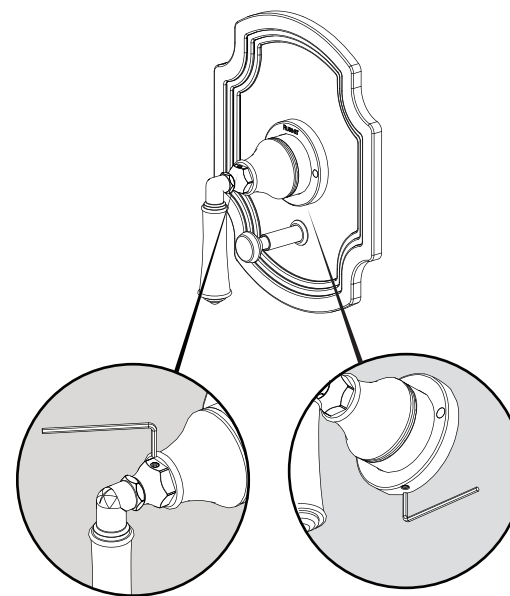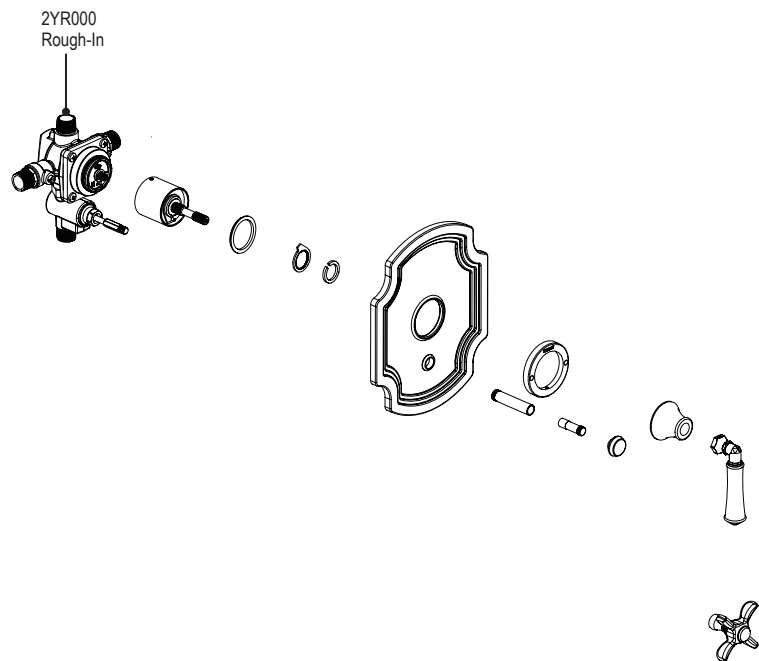


Tighten set screws to secure.



4

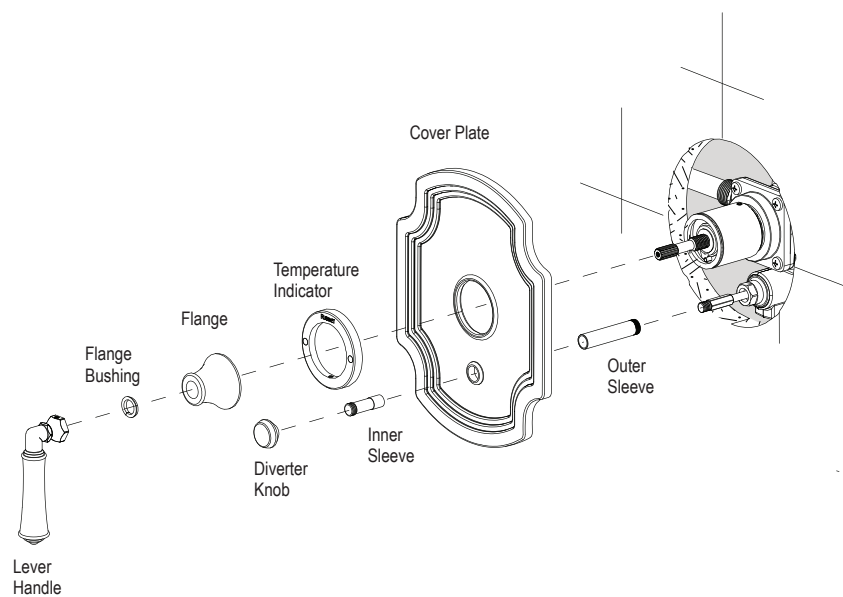


1

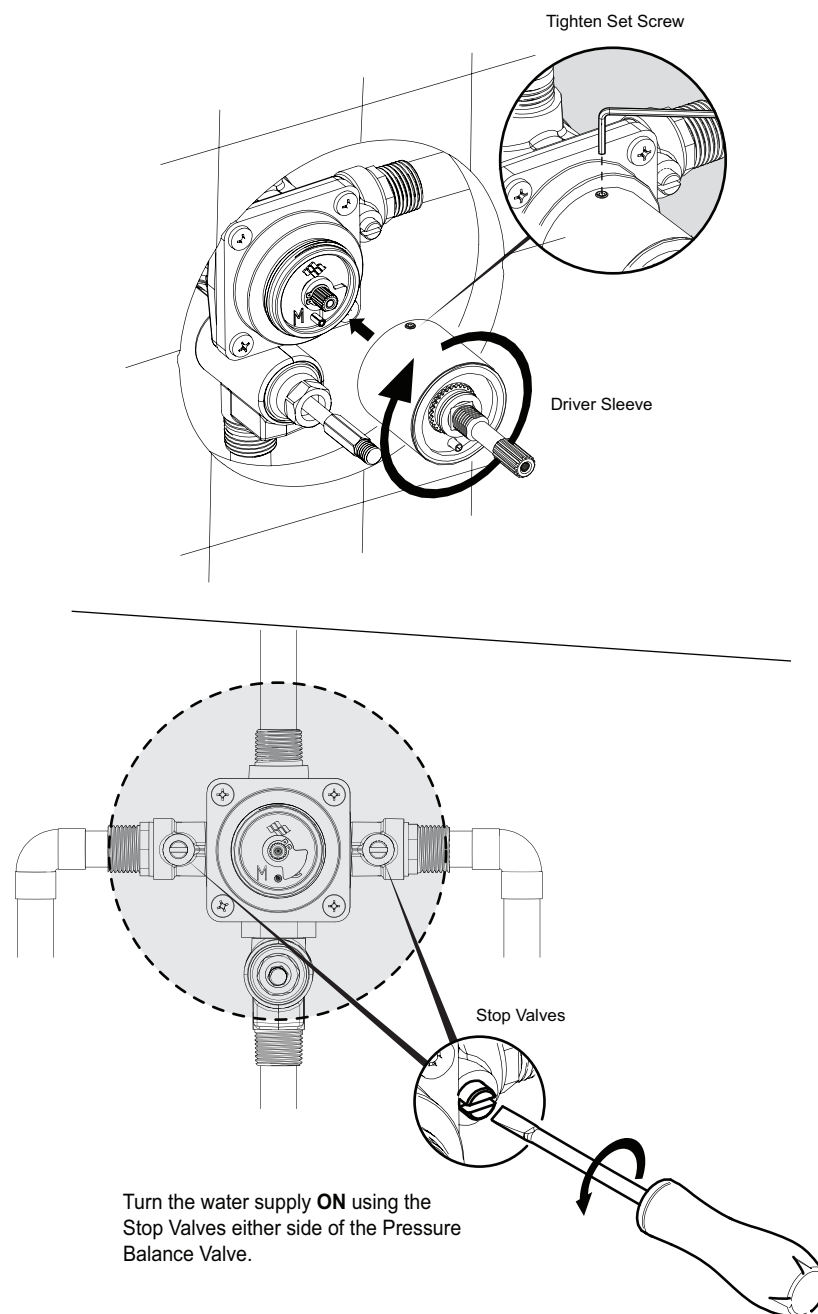

2

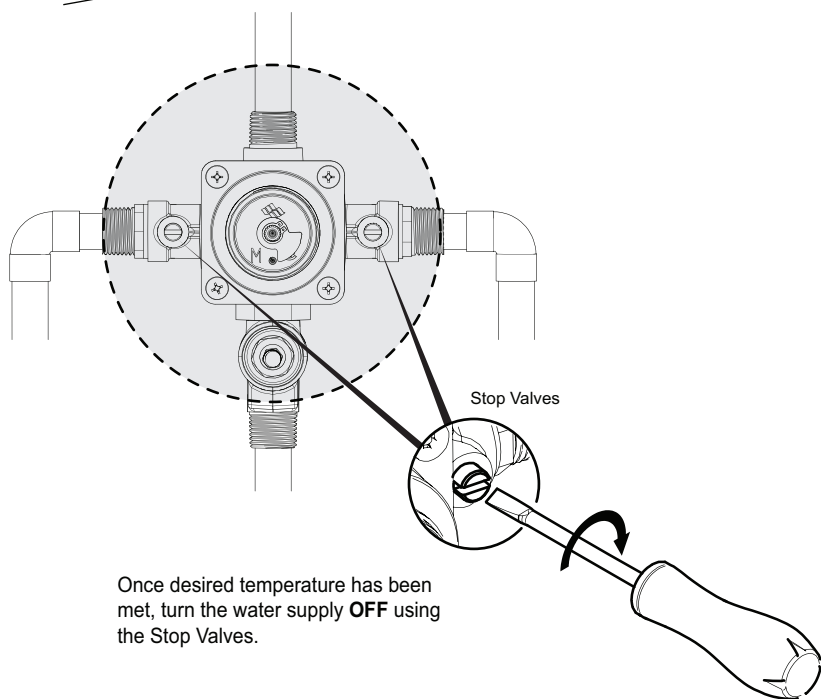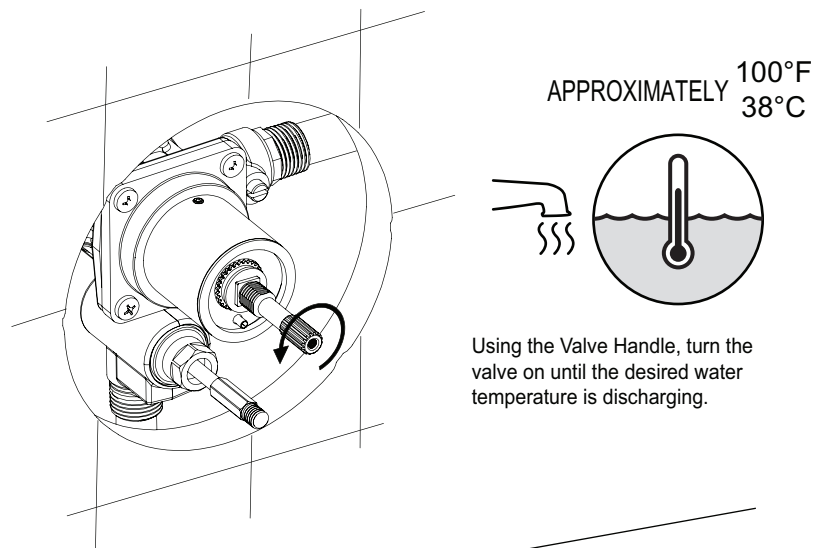

3

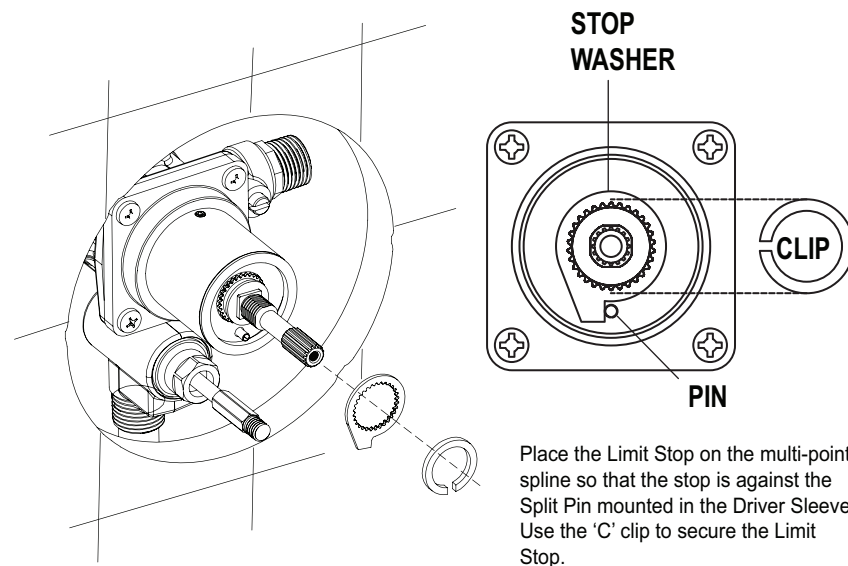

Turn the valve off using the Valve Handle.

