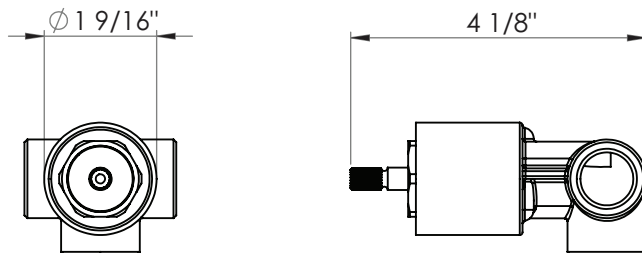


FEATURES:

- Brass construction
- Single handle control
- 3-Port 2 Way diverter valve
- Flow Rate 6.0 gpm @ 50 psi

**CONTACT US:**

If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com

171005



THE **Rubinet** FAUCET COMPANY**ASSEMBLY INSTRUCTION****2XR100 / 2XR000**

TWO WAY DIVERTER VALVE

**2XR100****2XR000**



1

Rough-in must be positioned square to the wall for proper trim installation.

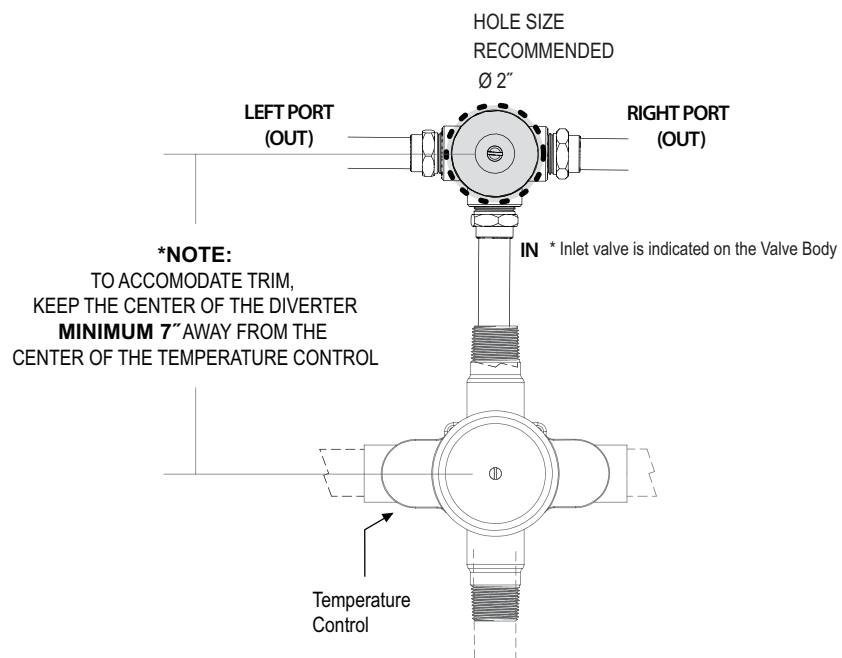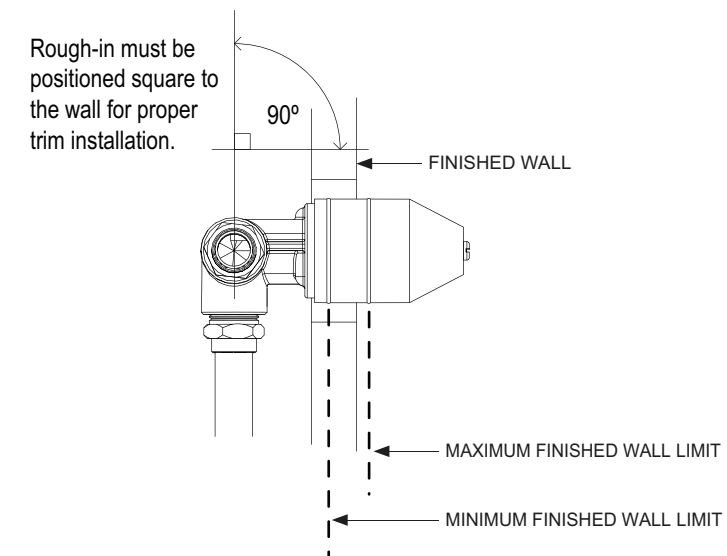

* PROTECTIVE COVER MUST NOT BE REMOVED WHEN PLASTERING AND/OR TILING.

2

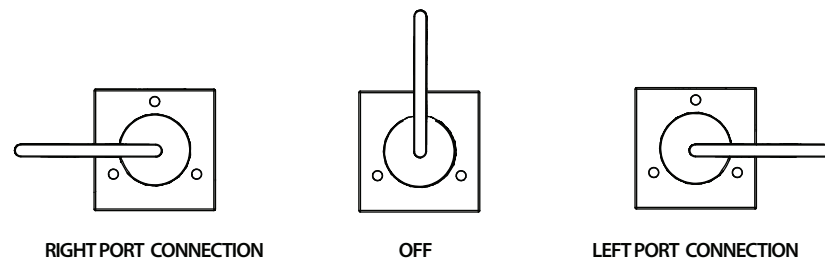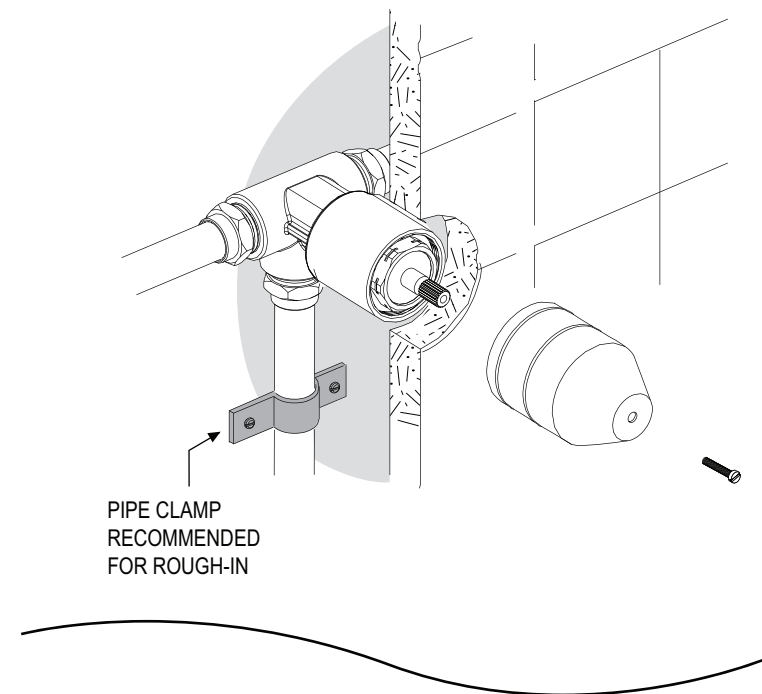

* IF PEX PIPING IS TO BE USED, DO NOT USE PEX WITH A DIAMETER OF LESS THAN 3/4" FOR MAXIMUM FLOW FROM THE VALVE