
FEATURES:
- Brass construction
- Shut-Off Volume Control Valve
- Single Mixer control
- Factory preset at 38ºC (100.4ºF)
- Temperature range from 15ºC (59ºF) to 60ºC (140ºF)
- Safety stop with override function
- Flow Rate 4QR100/ 4QR000 (1/2˝) : Tub 7.0 gpm @ 50 psi
  Shower 7.0 gpm @ 50 psi

  4QR300/ 4PR000 (3/4˝) : Tub 10.0 gpm @ 50 psi
  Shower 10.0 gpm @ 50 psi

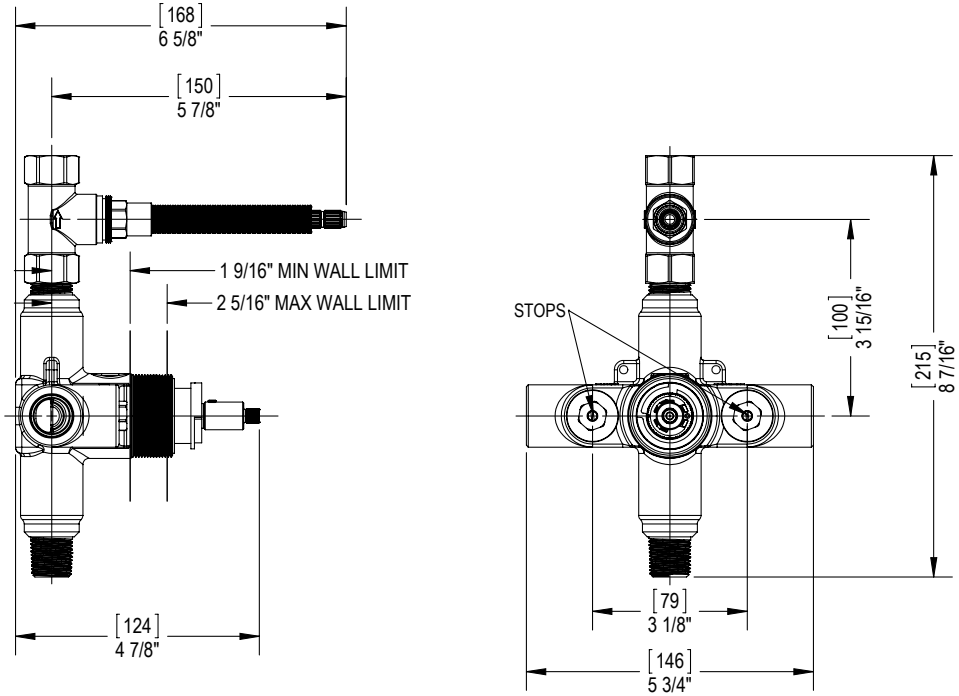

CONTACT US:
If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit **www.rubinet.com**

170704

THE **Rubinet** FAUCET COMPANY

ASSEMBLY INSTRUCTION 4QR100 (4QR000) / 4QR300 (4PR000)

TEMPERATURE CONTROL VALVE WITH BUILT-IN STOPS & VOLUME CONTROL VALVE ROUGH-IN





4QR100 (1/2˝)
4QR000 (1/2˝)

4QR300 (3/4˝)
4PR000 (3/4˝)

REMOVAL OF FIXTURE:
Always turn the water supply off before removing the existing fixture or disassembling a valve. Open all fixture handles to relieve water pressure and to ensure that the water has been successfully turned off.

1

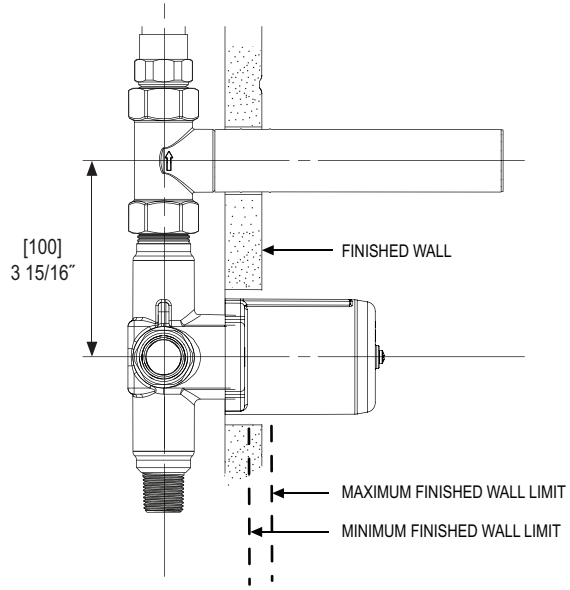

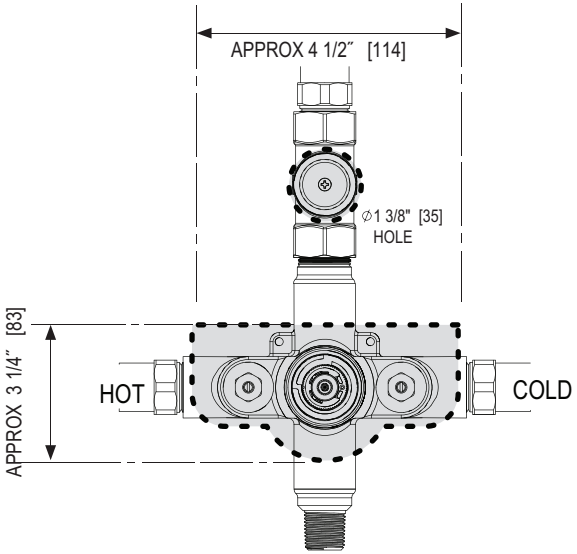


LEAVE OPENING FOR ACCESS TO STOPS WHEN CUTTING THE WALL TILES

PROTECTIVE COVER **MUST NOT BE REMOVED** WHEN PLASTERING AND/OR TILING.

4QR100 (4QR000) / 4QR300 (4PR000)

2

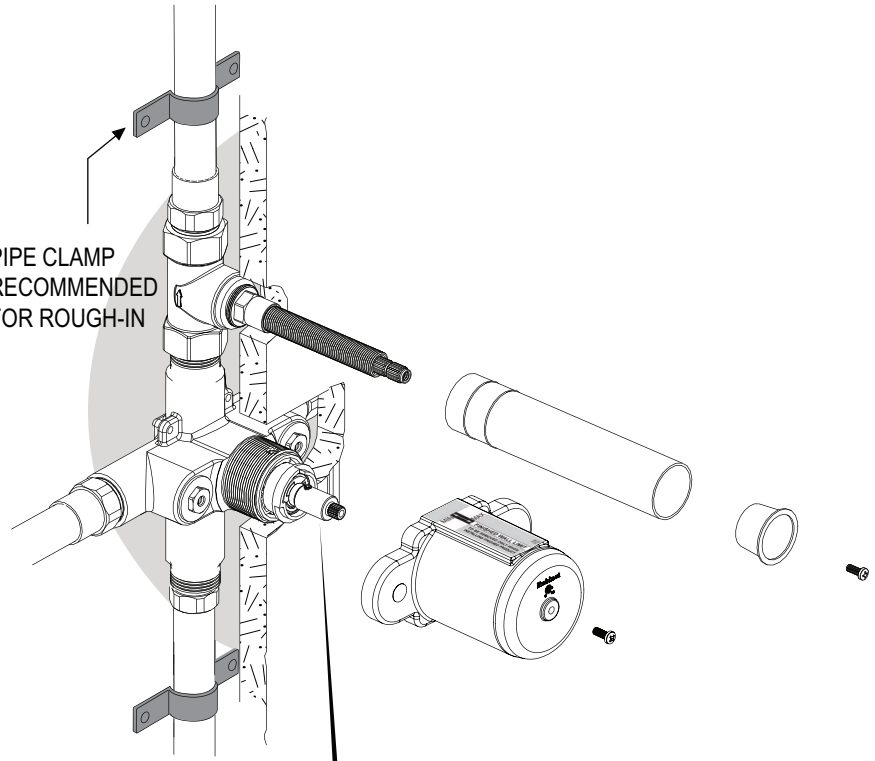

FACTORY CALIBRATED POSITION
(at 38°C / 100°F)
Red marks should be aligned
at 12 O'Clock position

*** IF PEX PIPING IS TO BE USED,** DO NOT USE PEX WITH A DIAMETER OF LESS THAN 3/4″ FOR MAXIMUM FLOW FROM THE VALVE