



ASSEMBLY INSTRUCTION**1GHOL or R****WALL MOUNT LAVATORY SET****1GHOL****1GHOR****REMOVAL OF FAUCET:**



Always turn the water supply off before removing the existing faucet or disassembling a valve. Open both faucet handles to relieve water pressure and to ensure that the water has been successfully turned off.

CARE OF FAUCET:


The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.

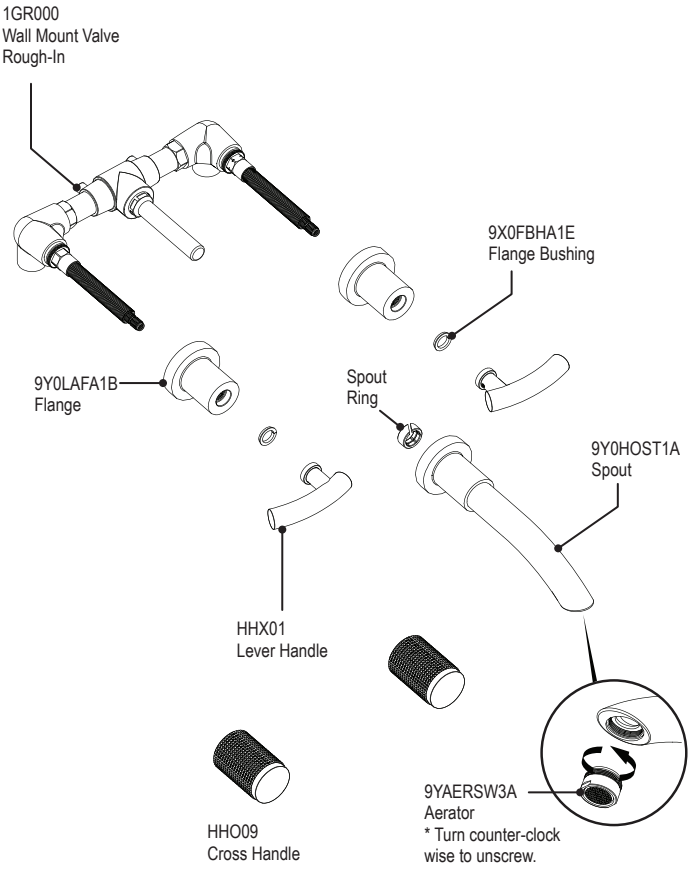



1

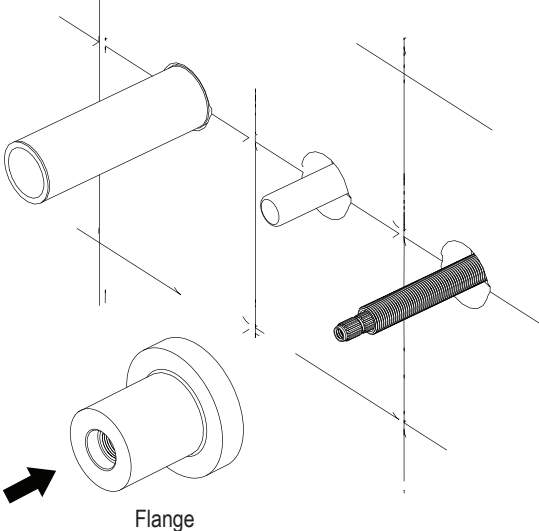

MUST CUT FLUSH
TO THE FLANGE TRIM
* $1 \frac{7}{8}''$ (47.5mm)
from the finished wall

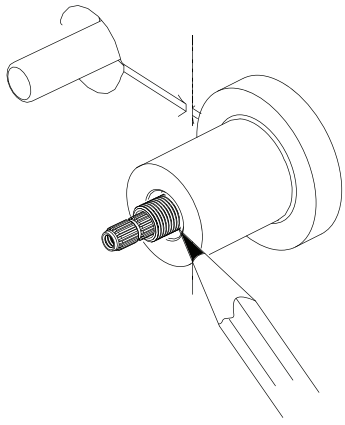


2



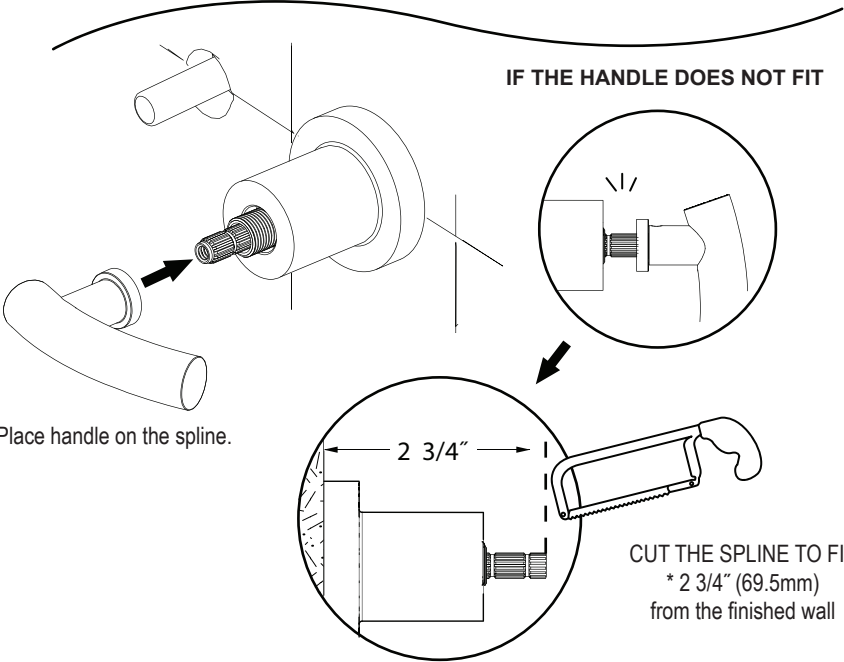
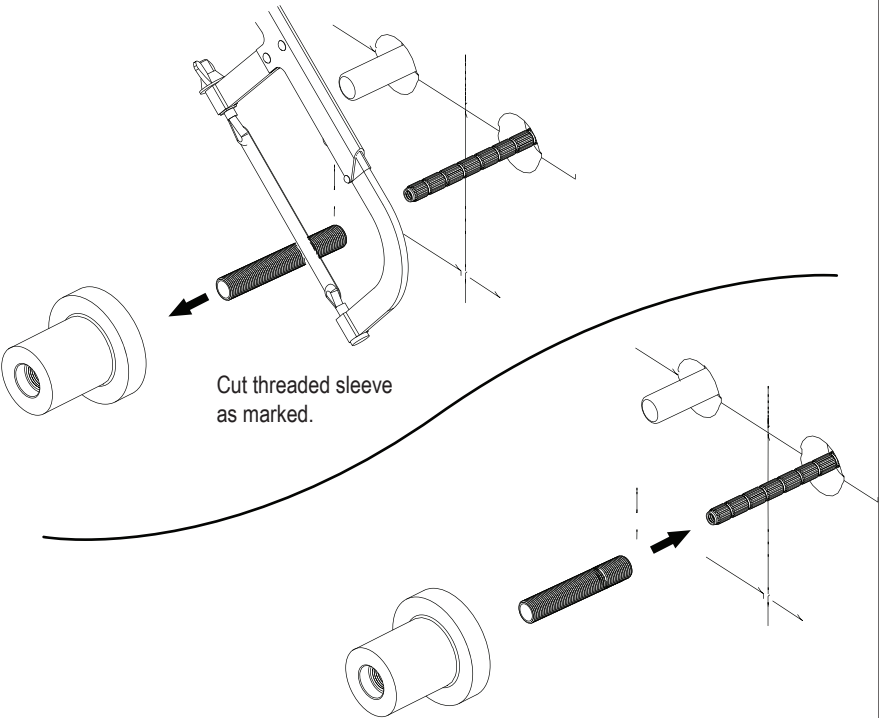


3



Turn each cartridge
splines into **OFF** position
before installing handles

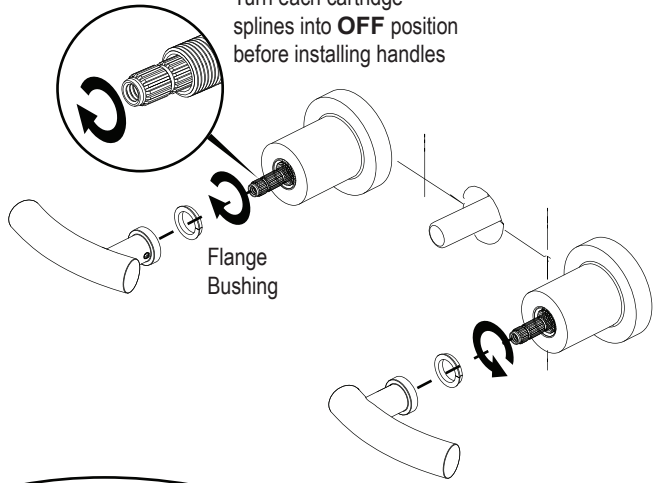

* Cut the Slip-Fit Shank 1 5/8" long from the
finished wall and **MUST REMOVE ANY
BURRS** before installing the Wall Spout.



ROUND HANDLE INSTALLATION

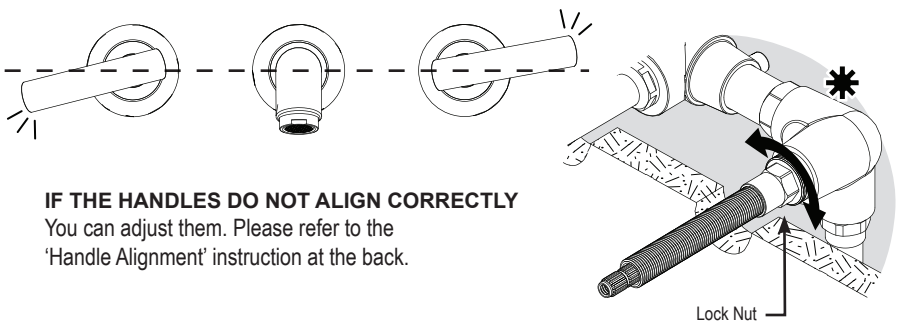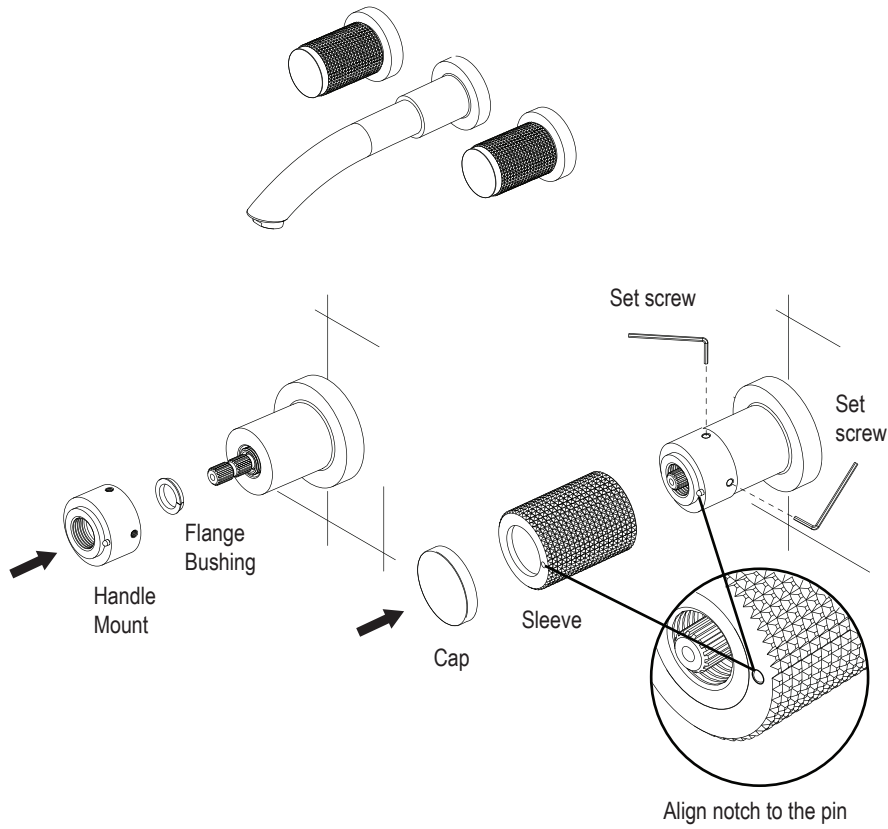


HANDLE ALIGNMENT (1G)


1




LOCK NUT
Loosen the lock nut using
* **17mm Deep Socket.**
1/2" Drive

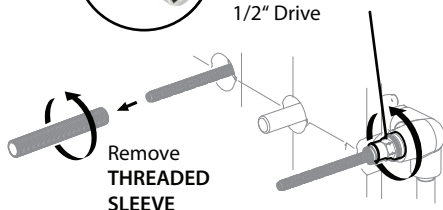

2

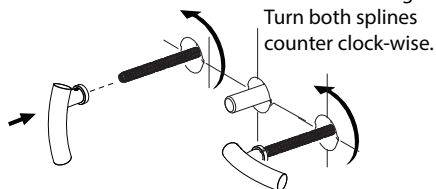


3



Once cartridge valves are loose, screw them
back into the faucet using the handle.
Stop when you feel a noticeable resistance.
Then remove handles.


4

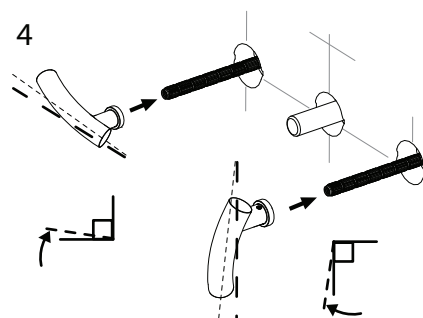

Replace Left Handle (hot) **one tooth off**
from the **OFF** position as shown.


And Right Handle (cold) **one tooth off**
from the **ON** position as shown.

5



Turn the handles to the desired alignment.
(This will unscrew the cartridge)
This adjustment should not be more than 25°.

6

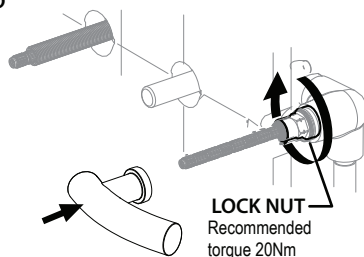

Tighten Lock Nut using **17mm deep socket**
wrench to secure cartridge valve position.


*Use handle to hold spline while tightening.

FEATURES:

- Brass construction with choice of 21 finishes
- Two Round or Lever handles
- Quarter-turn ceramic disk cartridges
- 1.2 gpm @ 50 psi (Helps meet CalGreen regulation)

APPROVAL:

- AB1953 / NSF61
- ASME A 112.18.1
- CSA B125.1

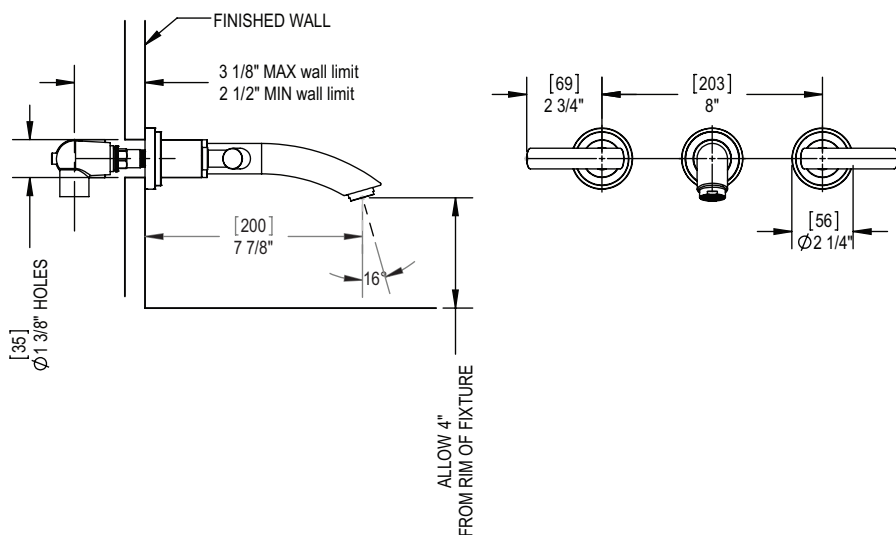

CONTACT US:

If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com