THE Rubinet FAUCET COMPANY

ASSEMBLY INSTRUCTION 3FHXL or C

FLOOR MOUNT TUB FILLER WITH HAND HELD SHOWER




3FHXL




3FHXC

REMOVAL OF FIXTURE:
Always turn the water supply off before removing the existing fixture or disassembling a valve. Open both fixture handles to relieve water pressure and to ensure that the water has been successfully turned off.


CARE OF FIXTURE:
The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.

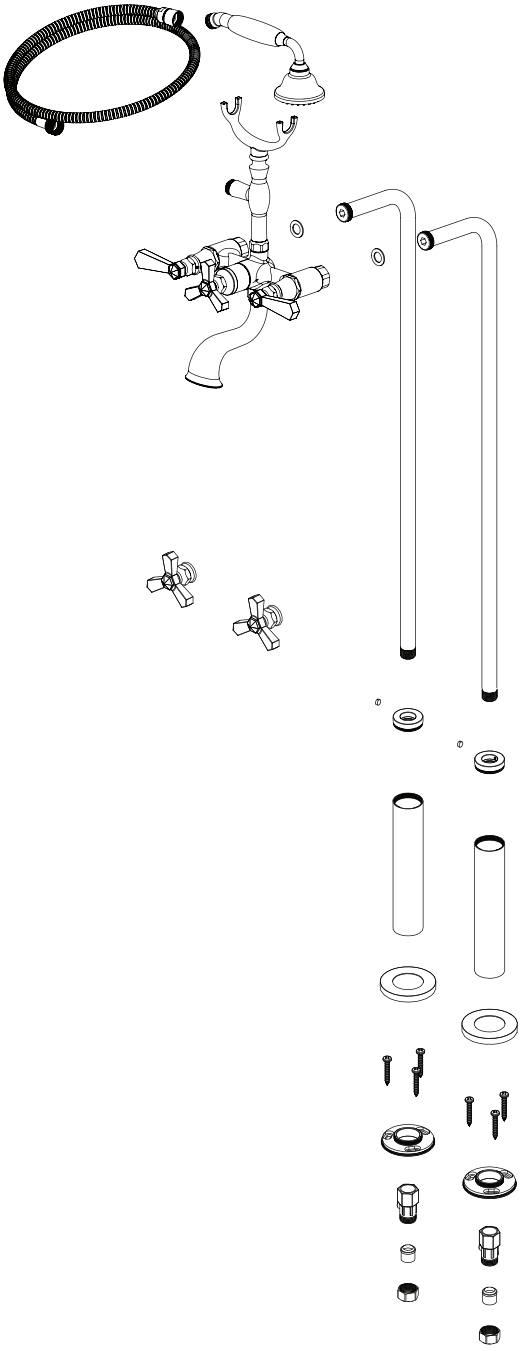


1

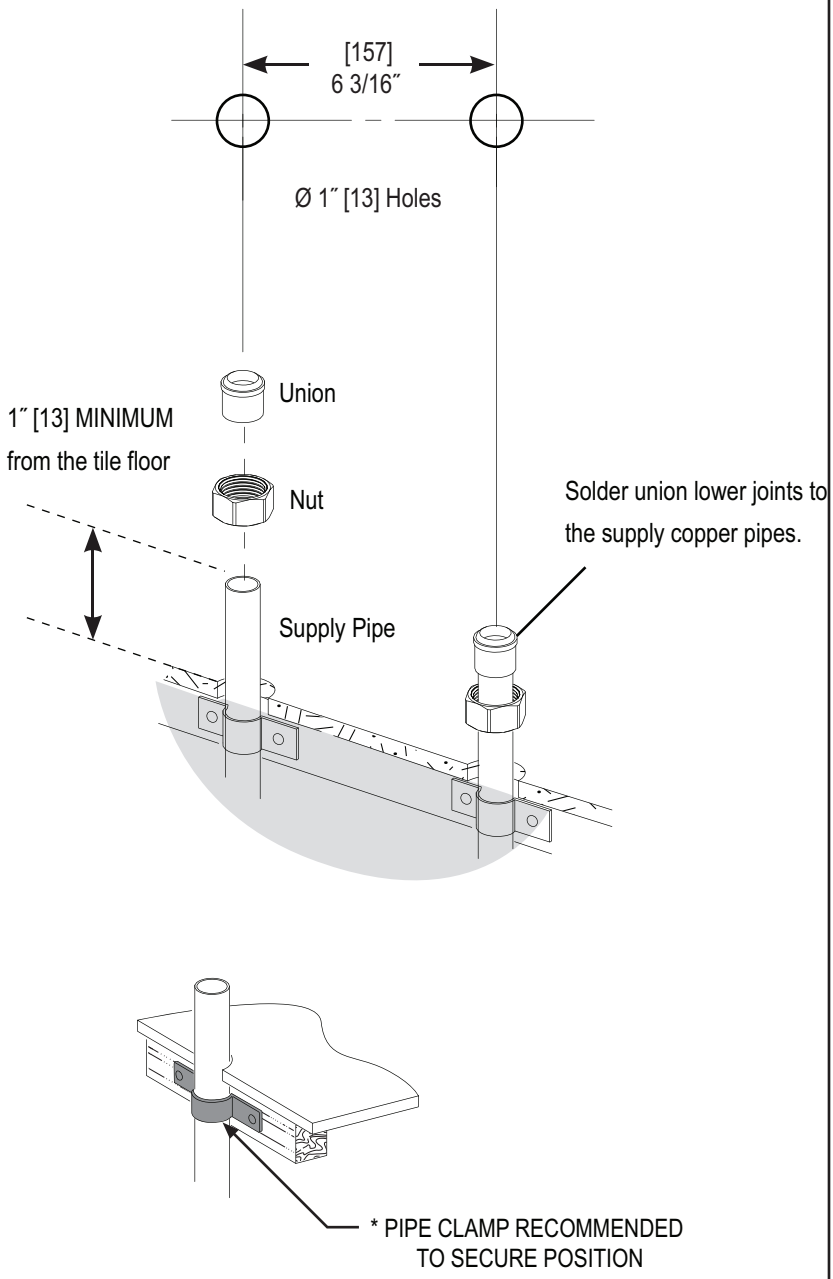
[157]
6 3/16″
Ø 1″ [13] Holes
Union
1″ [13] MINIMUM
from the tile floor
Nut
Solder union lower joints to
the supply copper pipes.
Supply Pipe
* PIPE CLAMP RECOMMENDED
TO SECURE POSITION


2

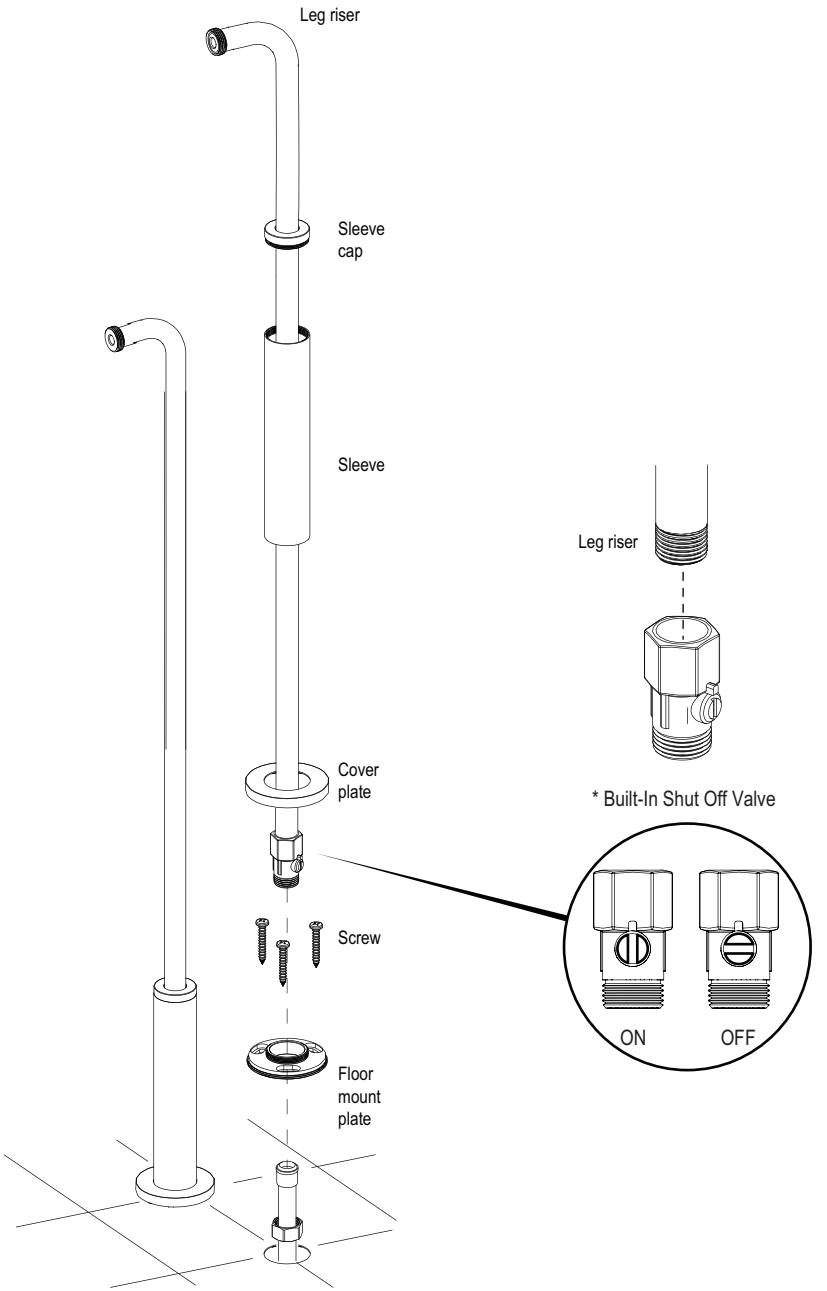
Leg riser
Sleeve cap
Sleeve
Cover plate
Screw
Floor mount plate
Leg riser
* Built-In Shut Off Valve
ON
OFF

3

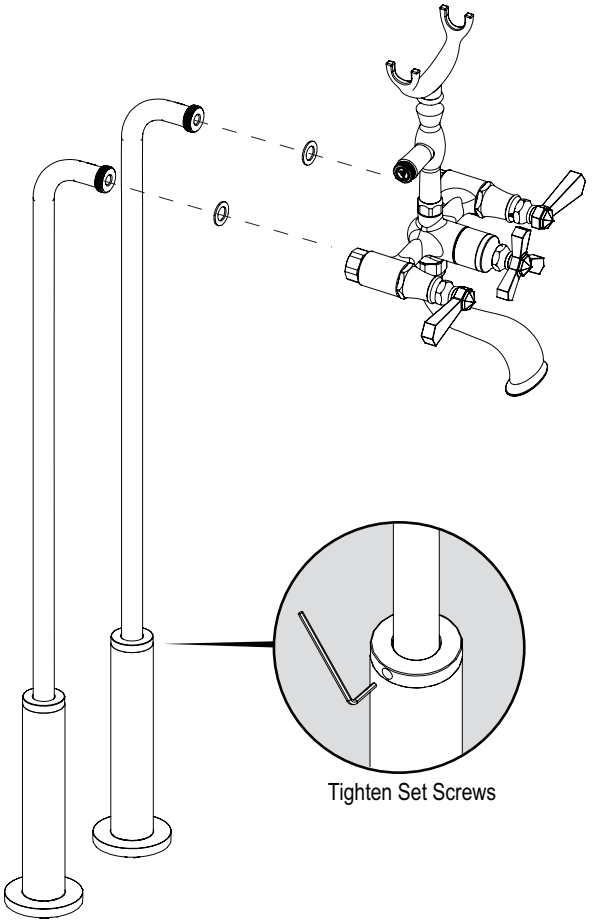

4

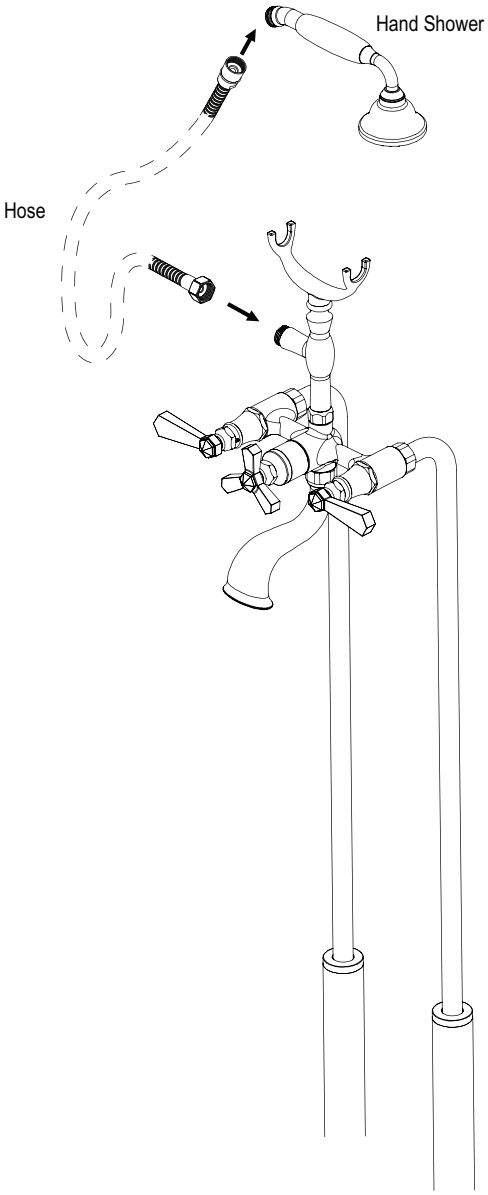


REMOVING DIVERTER CARTRIDGE

1. Remove the diverter handle. (center)

2. Remove the shaft using wrench.

3. Remove diverter cartridge.

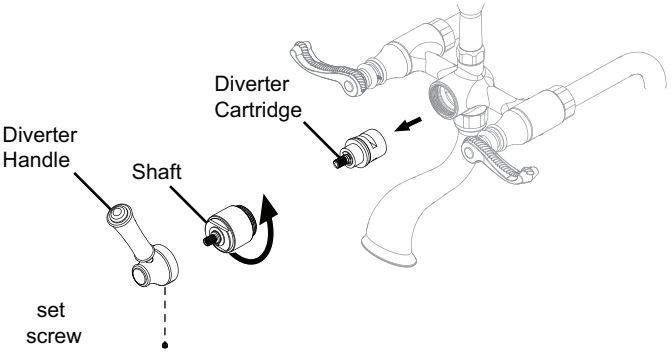

REPLACING DIVERTER CARTRIDGE
Align notch to the matching hole to ensure proper assembly

