


* Adjust the top side Brass Nut so that the correct sidebody height is achieved using the JIG as shown.


After adjusting the valve height, tighten the brass nuts on both top & bottom side to secure.

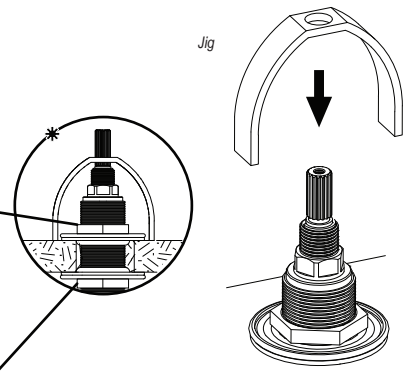


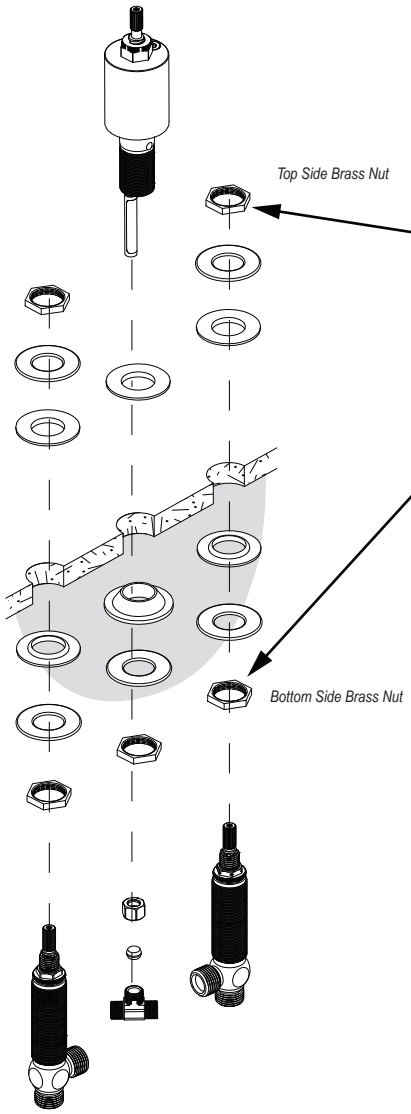


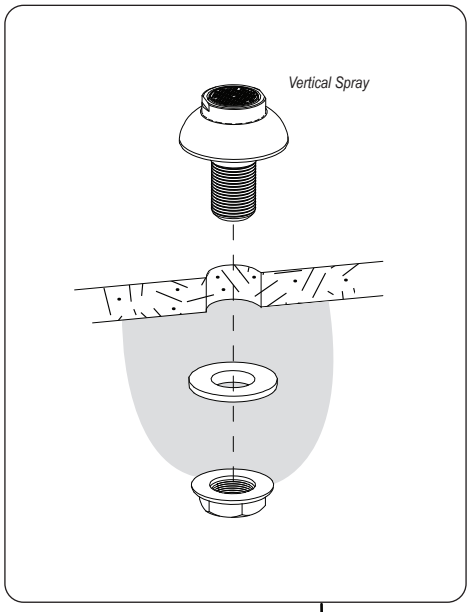

The outlet hole on the bidet valve body must be positioned to the side (left / right) into the cavity of the bidet ceramic.

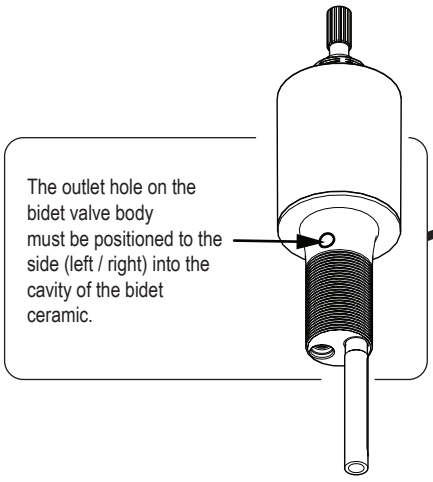


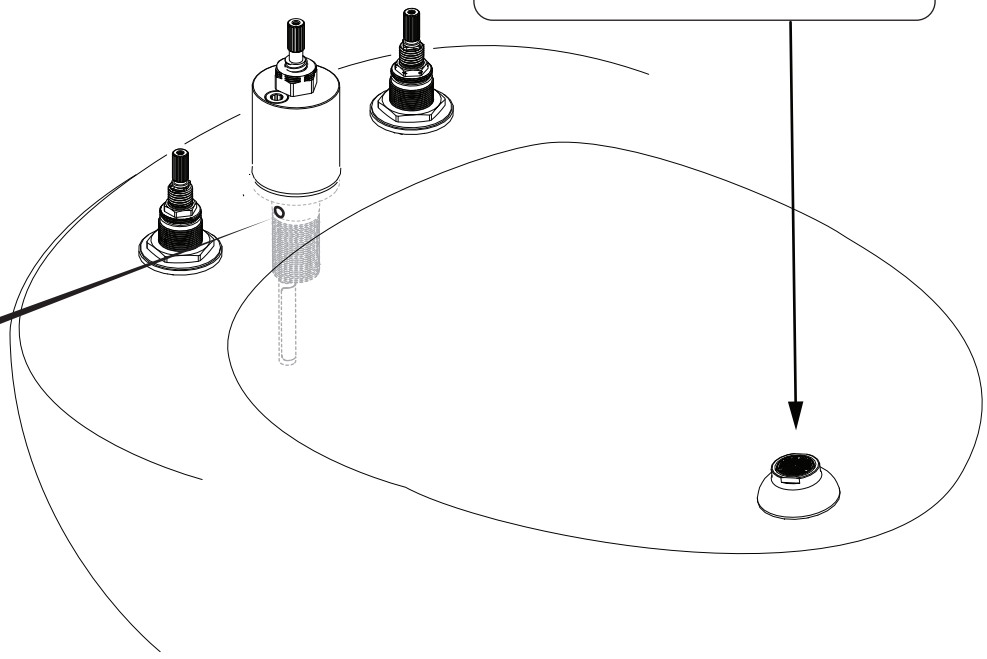

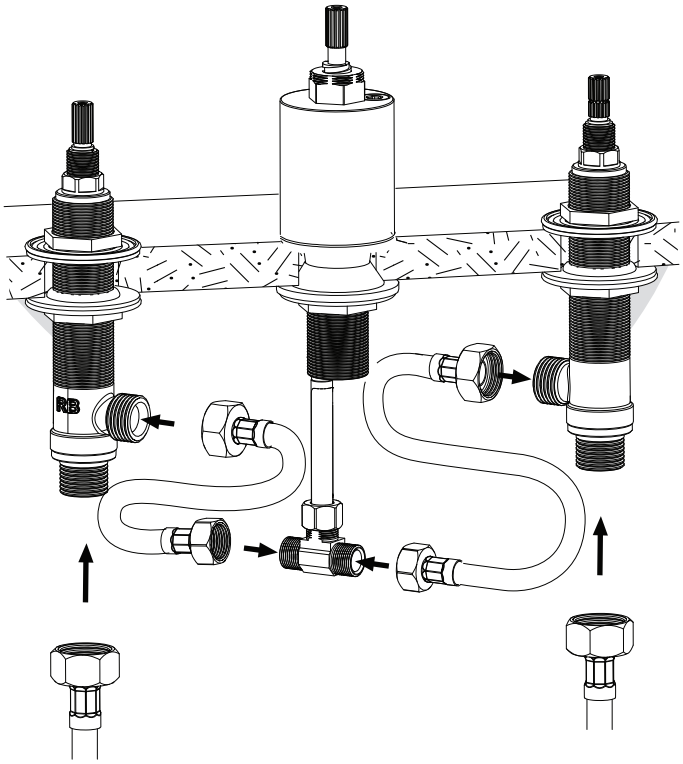


Water Supply (Hot)

Water Supply (Cold)

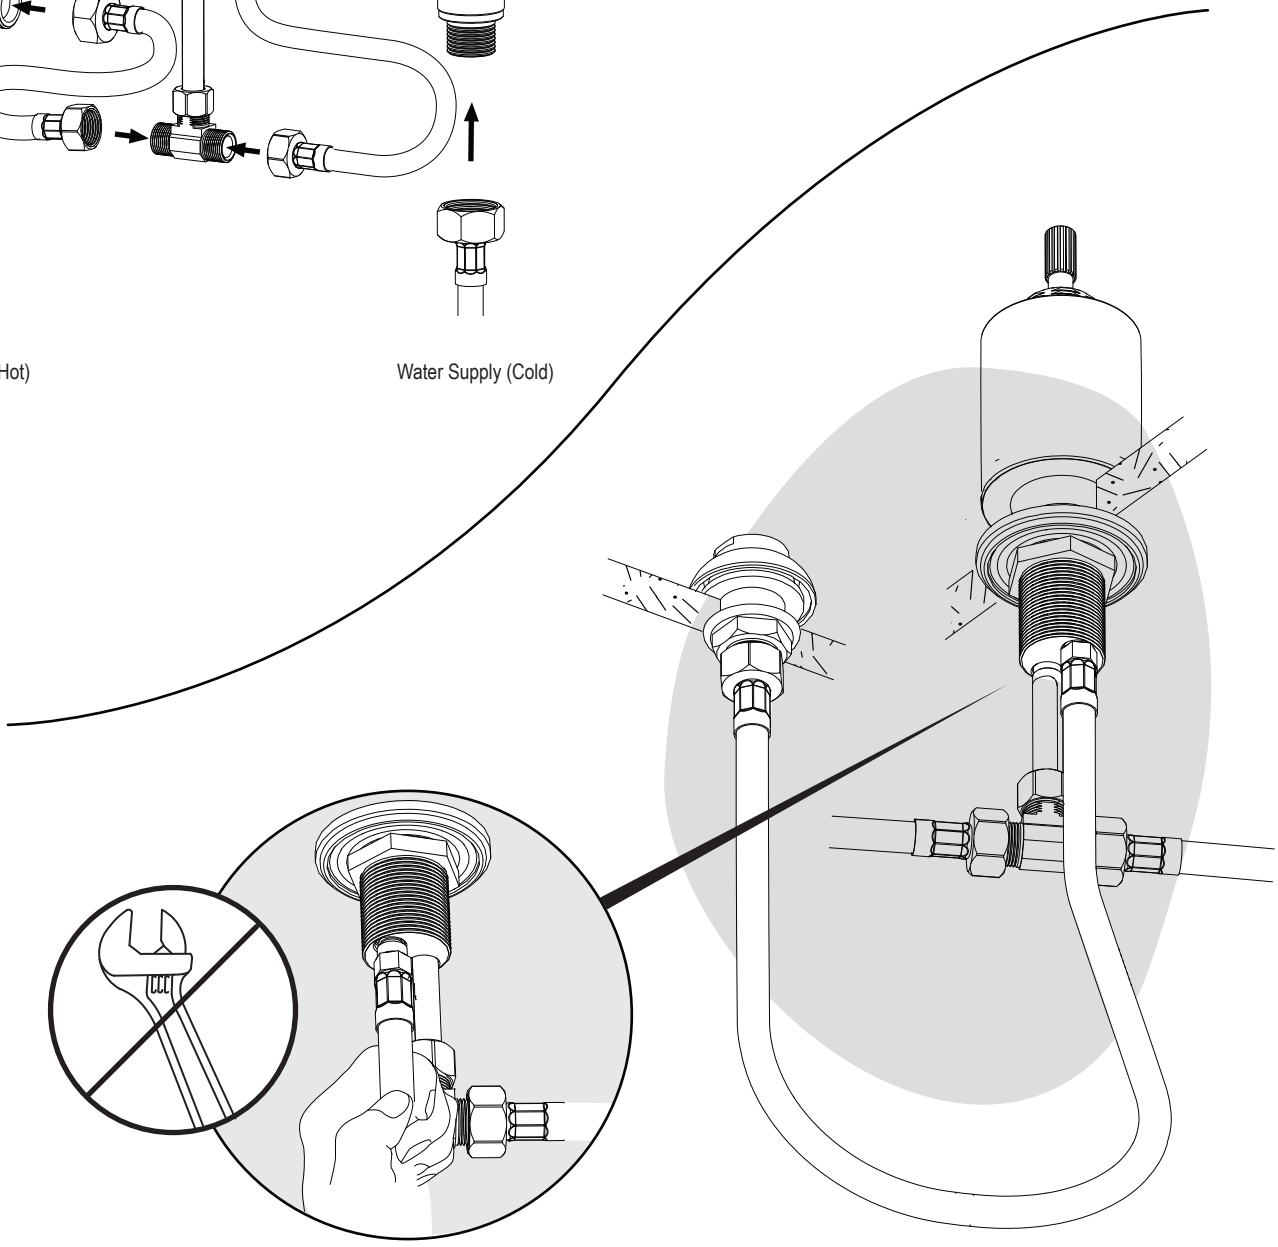

***HAND TIGHTEN ONLY.**
Overtightening may damage the hose washer which will result leaking.

1

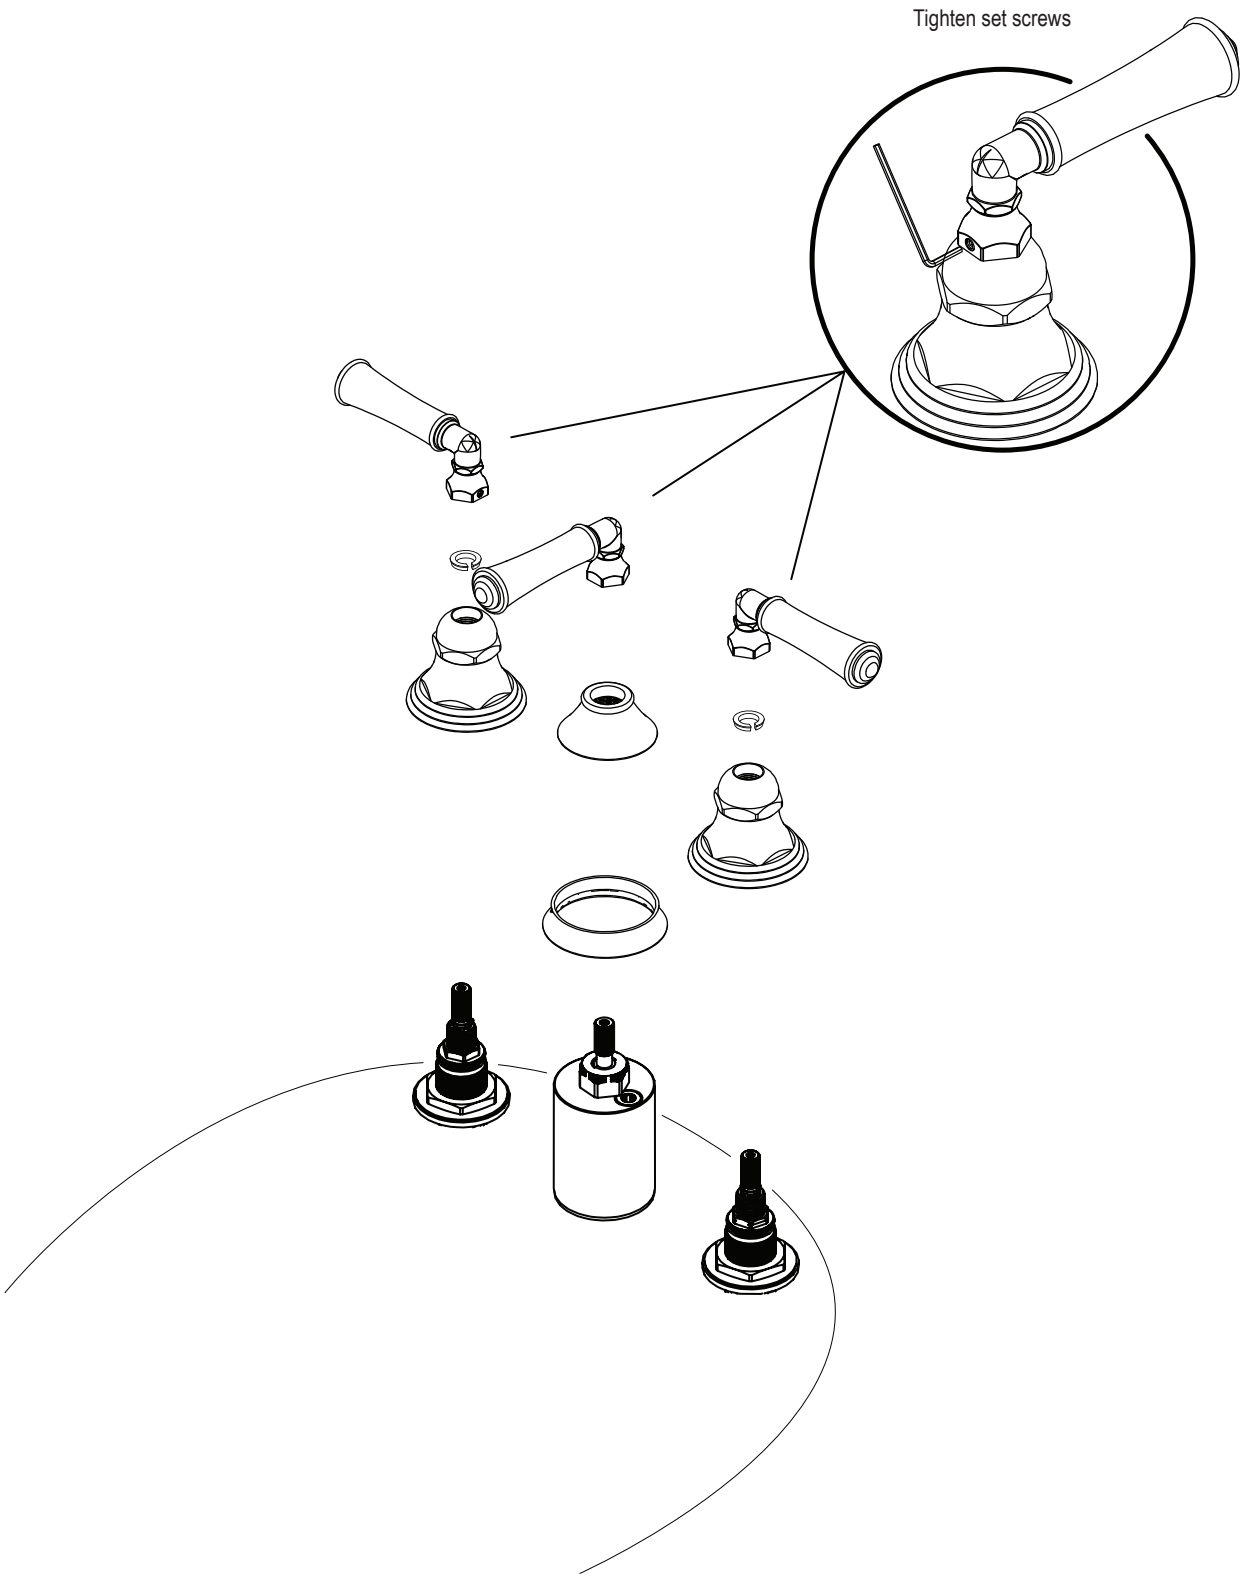

TEL: 905-851-6781
FAX: 905-851-8031
TOLL FREE: 800-461-5901