

ASSEMBLY INSTRUCTION**3XHOL**

THREE WAY DIVERTER WITH SHUT-OFF IN BETWEEN FUNCTIONS

**3XHOL****REMOVAL OF FIXTURE:**

Always turn the water supply off before removing the existing fixture or disassembling a valve. Open all fixture handles to relieve water pressure and to ensure that the water has been successfully turned off.


CARE OF FIXTURE:

The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.




CONTACT US:

If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: **905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com**



3XR100
Rough-In Valve

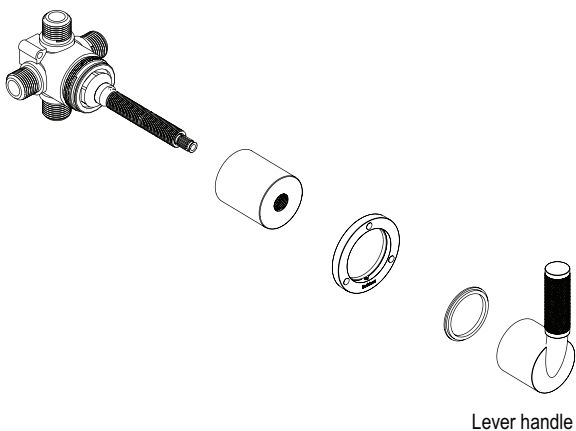

1

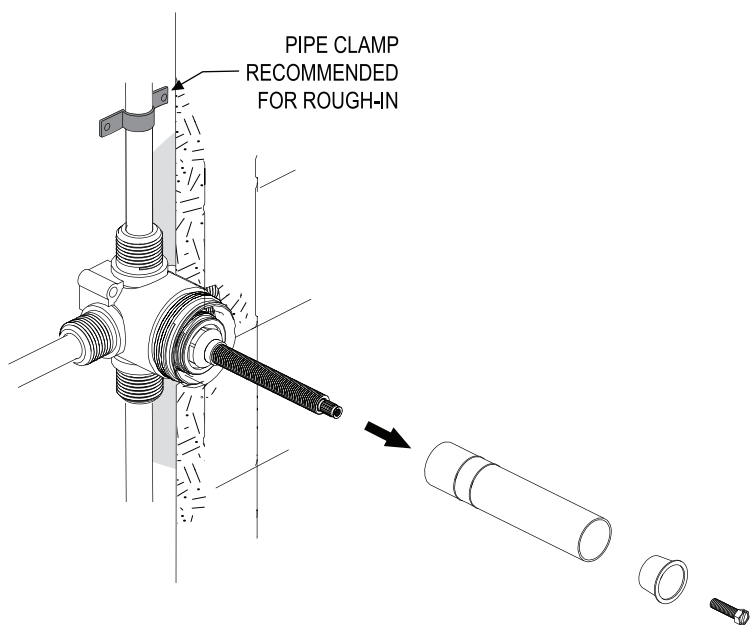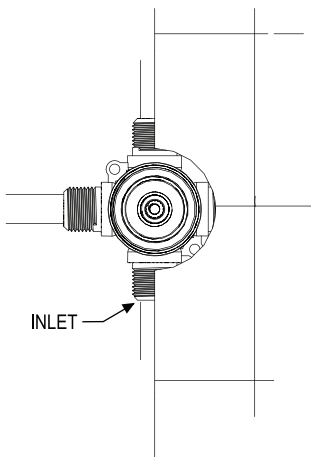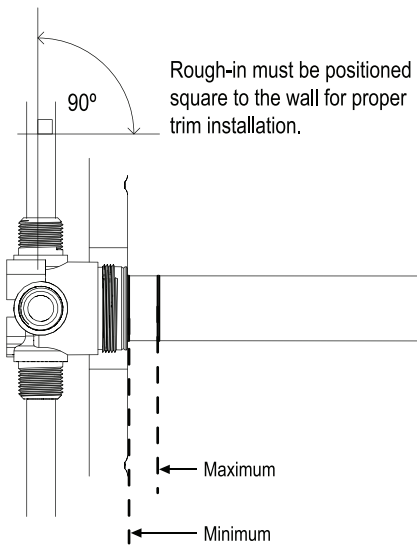



2

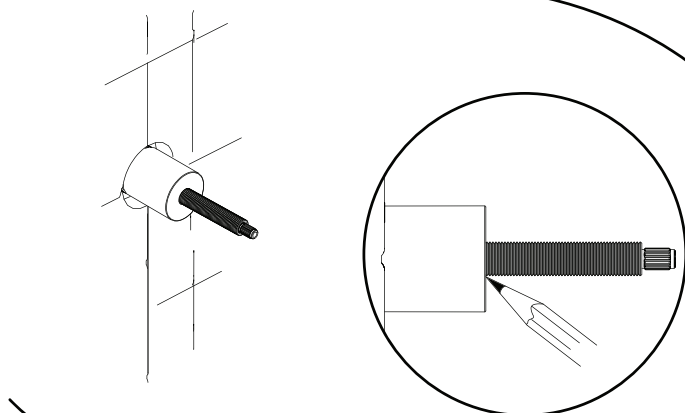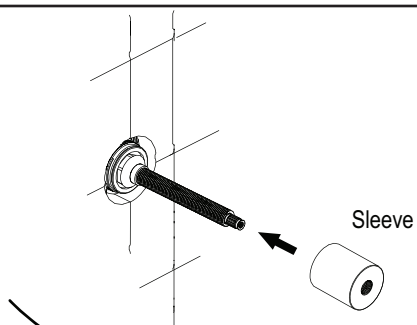




Mark threaded sleeve

Cut threaded sleeve where marked

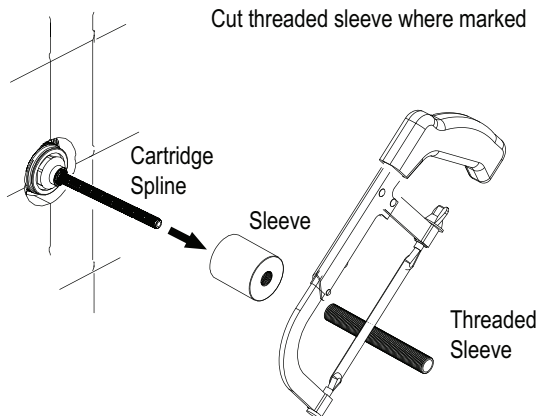




Hand tight only

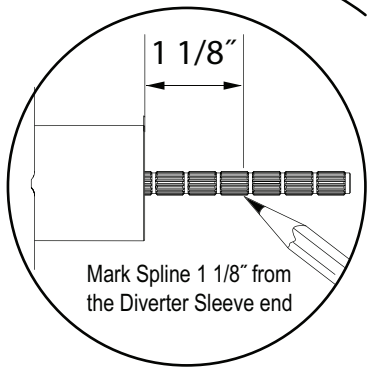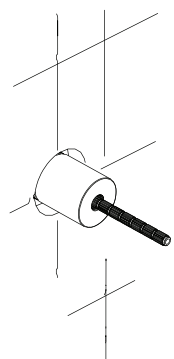

Mark Spline 1 1/8" from the Diverter Sleeve end

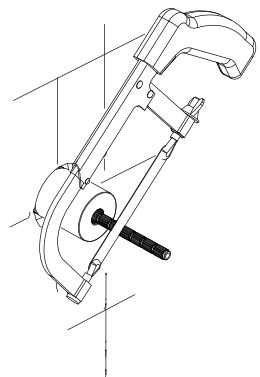

Cut spline where marked

