



Melinda 8

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| MODEL 191                                                                                    |                          |
| 66.5" x 35.5" x 23.5"<br>Optional pedestal: 50" x 35.25" x 3"                                |                          |
| FREESTANDING<br>81 gal to overflow                                                           |                          |
| Acrylic CXL™                                                                                 | DoloMatte™               |
| 121 lbs / 55 kg                                                                              | <SOAKER> 136 lbs / 62 kg |
| Filling this tub to the maximum may require an above average size or dedicated water heater. |                          |

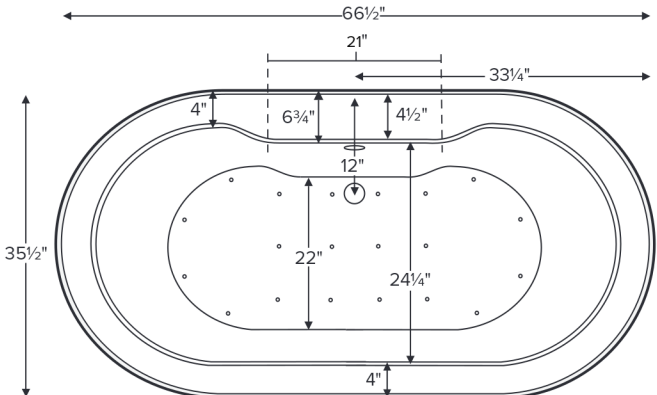


The Melinda 8 features a 4.5"-wide flat deck on the drain side for mounting faucetry.  
Shown with Air Massage Package.

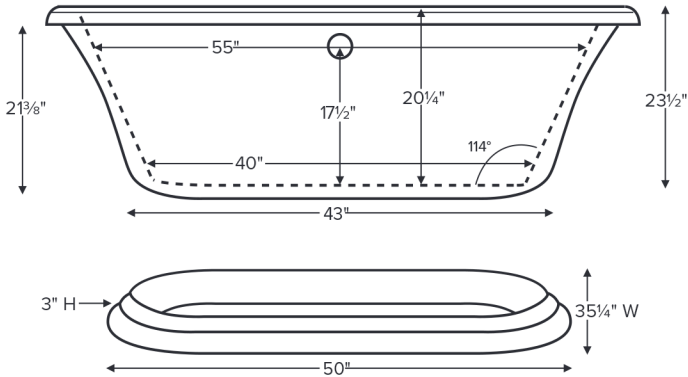

Drain Rough-In Measurements

| A      | B   | C      |
|--------|-----|--------|
| 6 3/4" | 12" | 5 1/4" |

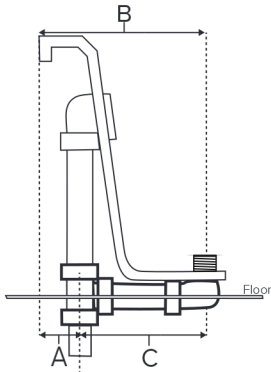

ELECTRICAL COMPONENTS & SPECIFICATIONS

| Hydrotherapy Package                                                                                                                                                                                  | Components Included          | 110V GFCI |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------|
| Air Massage                                                                                                                                                                                           | heated blower                | 1-15 amp  |
| Air Massage Elite                                                                                                                                                                                     | heated blower, chromatherapy | 1-15 amp  |
| Electrical requirements may change with the addition of optional therapy components.<br>See specific option details or installation information.<br>CSA Certified C/US; ANSI Z124.1 and ANSI 112.19.7 |                              |           |

IMPORTANT ORDERING & INSTALLATION INFORMATION:

- Before ordering or installing, please consider future access to equipment.
- This tub comes equipped with an access panel to facilitate installation of valves and the waste and overflow.
- Optional pedestal ring does not increase the height of the tub.
- Air baths require job site preparations for remote mounting the blower.
- Hydrotherapy equipment may ship loose for remote installation depending on tub model. See package content on the following page for details.
- MTI will eliminate the access panel upon request. Installation will be more difficult.
- Radiance placed on floor locations will affect placement of air jets.
- All tubs are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. Dolomatte meets ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

• Before discarding tub crate, check for accessories that may be packaged inside.  
• All product measurements are ±1/2".  
• Specifications and configurations are subject to change without notice.  
• Measurements herein supersede all others published prior to publication date below.

