


FEATURES:

- All brass construction.
- Available in all finishes. Warranty varies according to finish selection.
- Thermostatic valve cartridge P/N: 18.30.301
- Volume control cartridge P/N: 18.30.011
- Certified to meet or exceed the following codes and standards:
ASME A112.18.1/CSAB 125.1-2011


- Installation height from floor to center of valve to be determined by homeowner or installer.
- Do not rough-out without copper rough-in template. Guide will be sent ahead upon request.

TechData
SPECIFICATIONS
Butler Mill
3/4" Exposed Thermostatic
Shower Set with
Diverter & Handshower
Cross Handle

1.0098950

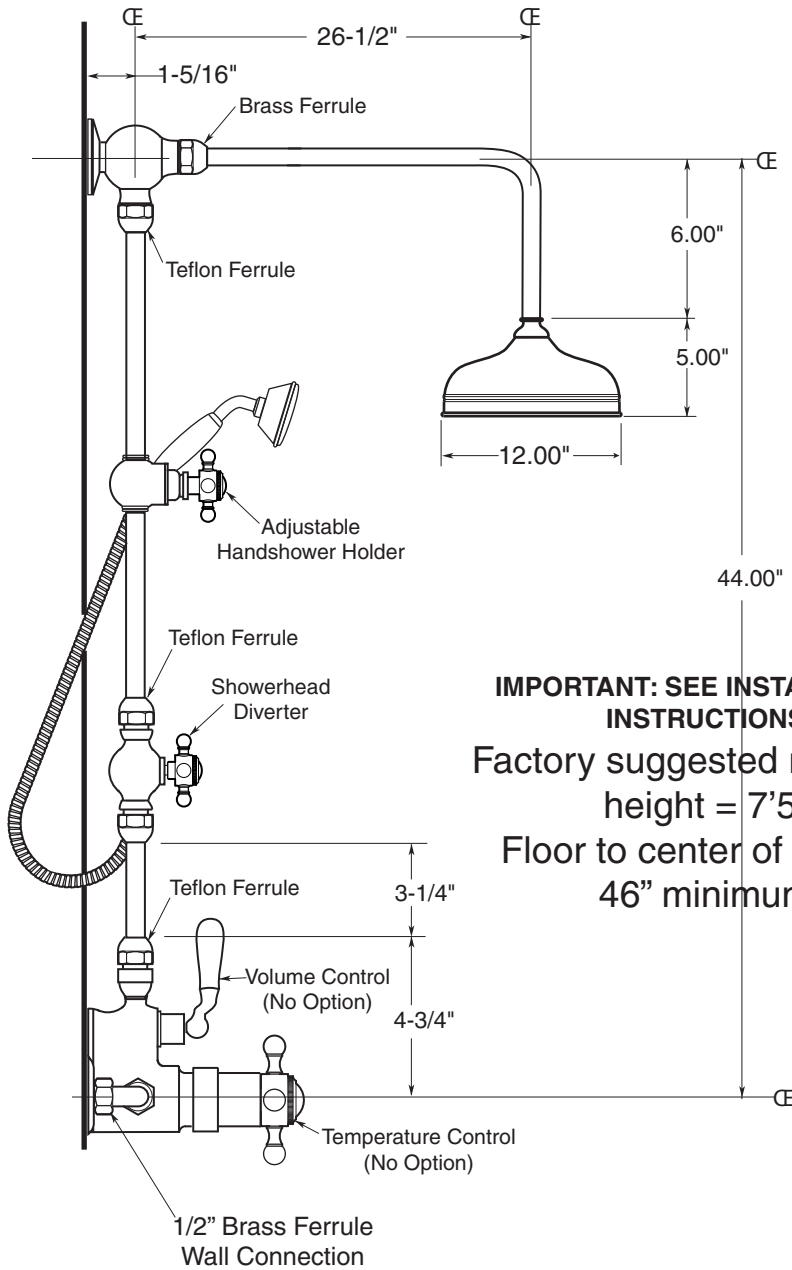

IMPORTANT: SEE INSTALLATION INSTRUCTIONS
Factory suggested minimum height = 7'5"
Floor to center of valve = 46" minimum

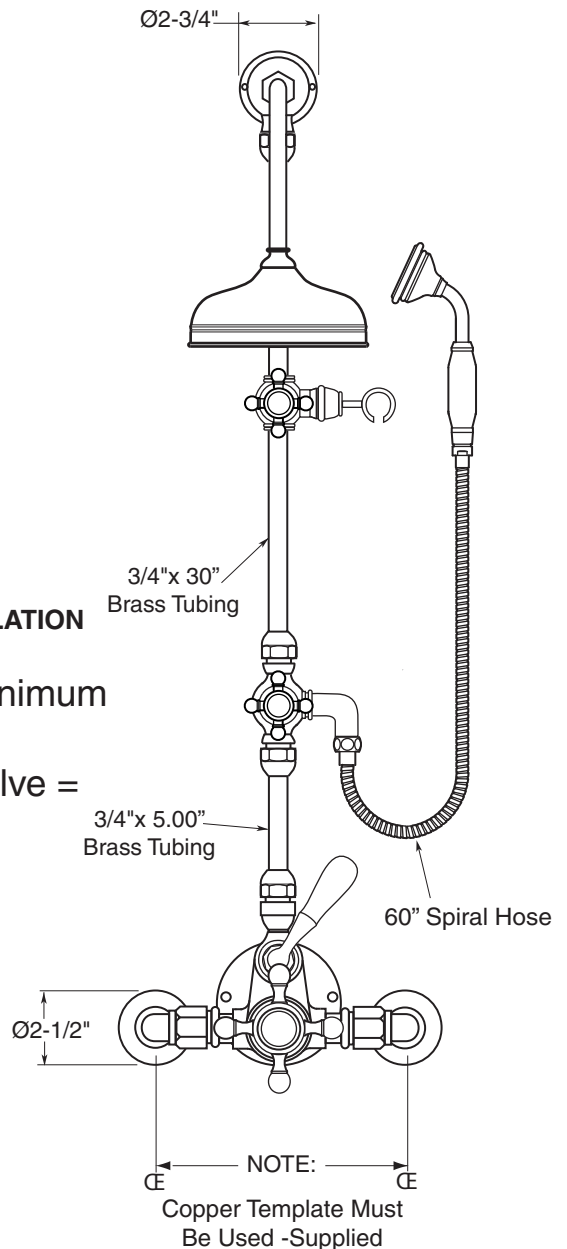

Note: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.