


230S-29-10

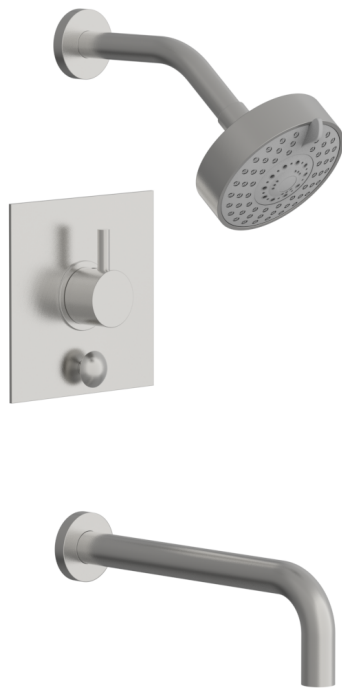


■ PRODUCT FEATURES

- Style: Contemporary
- Collection: Basic II
- Temperature Controlled By Pressure Balance
- Lever Handle
- Square Plate
-

■ TECHNICAL DETAILS

Access Hole Diameter: 5"
Handle Turn Angle: 115°
Spout Reach: 10"
Connection Type: Female 1/2" NPT Connection
Installation Type: Wall Mounted
Primary Material: Brass
Valve Material: Ceramic
Shower Flow Restriction: 1.8 gpm
Spout Flow Restriction: Full Flow
Water Pressure Maximum: 85 PSI
Water Pressure Minimum: 20 PSI
Water Pressure Recommended: 60 PSI

■ PRODUCT DIMENSIONS

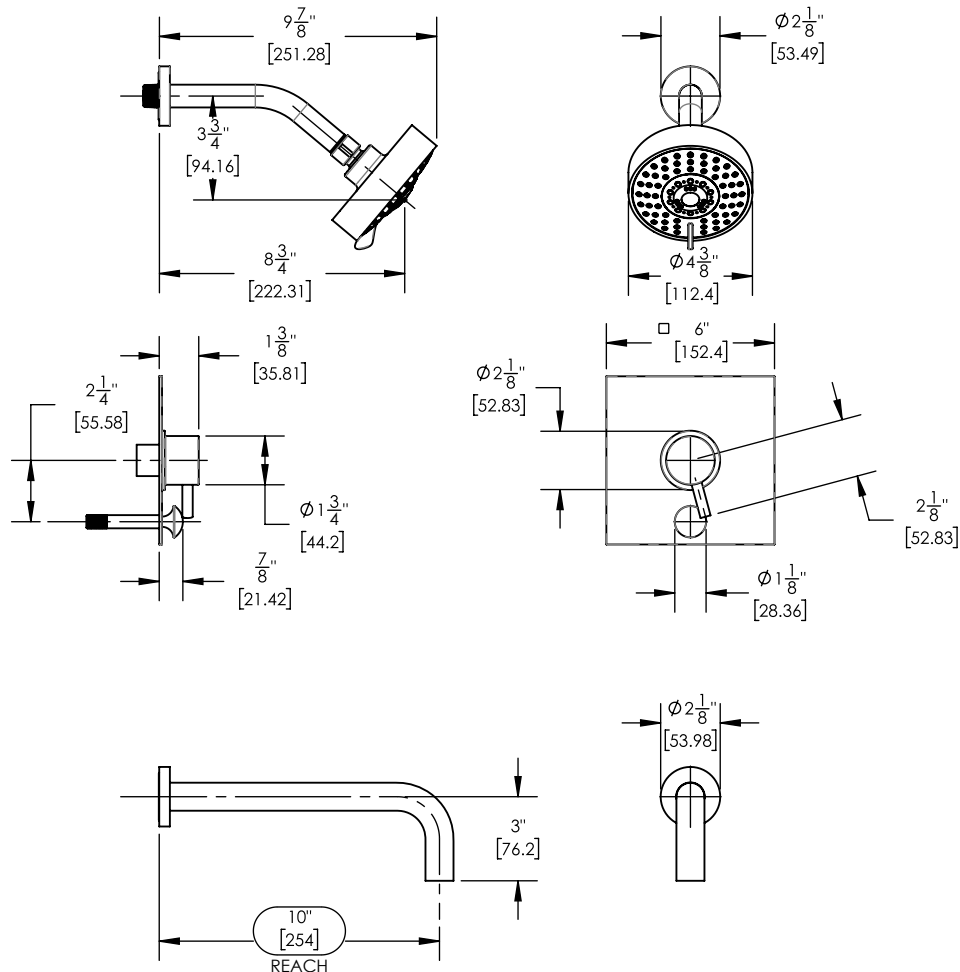

www.phylrich.com

1261 Logan Avenue, Costa Mesa, California 92626.
Phone: 714.361.4800 Fax: 714.617.3120

Rev-



CODES & STANDARDS

ASME A112.181/ CSA B1251, ASME 112.18.2/ CSA B125.2, ANSI NSF, CEC

WARRANTY

Mechanical Warranty: 10 Years from date of purchase.
Finish Warranty: See catalog for further information.