TARA Two-way diverter for deck-mounted tub installation - Chrome

TARA

29 140 892 Product version from 6/30/2015



- Integrated diverter
- 1-1/4" hole diameter
- Flange diameter 2-1/8"
- 1/2" connection
- Water flow rate limited to max. 17.1 gpm


(ADA)

Chrome	29 140 892-00
Brushed Platinum	29 140 892-06
Platinum	29 140 892-08
Dark Chrome	29 140 892-19
Brushed Durabrass (23kt Gold)	29 140 892-28
Matte Black	29 140 892-33
Brushed Dark Brass (PVD)	29 140 892-39
Brushed Bronze (PVD)	29 140 892-42
Brushed Dark Bronze (PVD)	29 140 892-43
Brushed Champagne (22kt Gold)	29 140 892-46
Champagne (22kt Gold)	29 140 892-47
Brushed Chrome	29 140 892-93
Brushed Dark Platinum	29 140 892-99

TARA Two-way diverter for deck-mounted tub installation - Chrome

29 140 892 Product version from 6/30/2015

mm [inches]

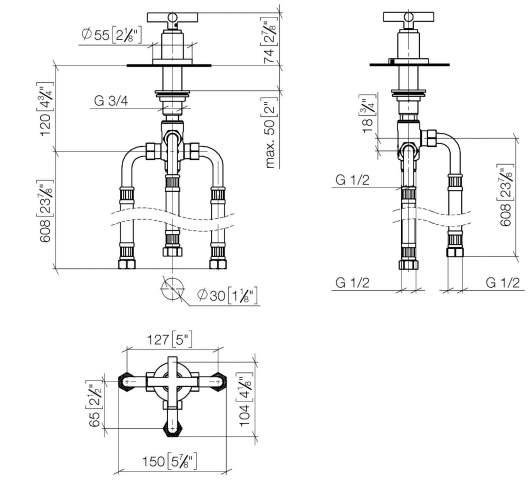

Flow rate chart



Codes & Standards


ASME A112.18.1	California Energy Commission (CEC)	cUPC	DIN 4109
ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen

Certificates and sustainability

WRAS_1911	LGA_29	IAPMO_4976	EPD-DOR-20230287-IBA1-EN Environmental.product-declarat
WRAS_260902			

TARA Two-way diverter for deck-mounted tub installation - Chrome

29 140 892 Product version from 6/30/2015

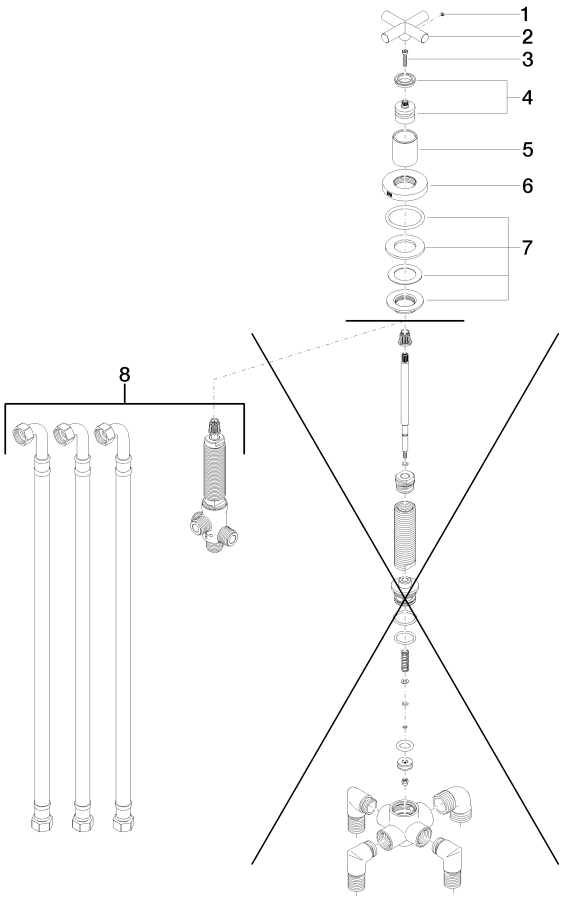

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
5	09 21 02 140-00	sleeve	1.00	26
1	09 31 11 055 90	pin	1.00	14
8	90 17 09 051 00 90	diverter	1.00	14
4	90 12 12 007 00-00	base	1.00	26
7	04 23 10 004 03 90	fixing set	1.00	14
2	09 20 89 011-00	handle	1.00	26
6	09 27 89 102-00	rosette	1.00	26
3	90 30 30 075 00 90	screw	1.00	14