DORN BRACHT

LULU Concealed thermostat with one-way diverter - Chrome

LULU

36 425 710 Product version up to 8/24/2020



- Cover plate 5-7/8" x 3-1/2"
- Temperature control handle with safety lock at 100 °F/ 38°C
- Max. temperature can be set on the trim

(ADA)

(ADA)

Chrome	36 425 710-00 0010
Brushed Platinum	36 425 710-06 0010

Required article



Concealed thermostat for one- and two-way outlets - 35 426 970-90 0010
- Max. rough in depth 5-3/8"
- Min. rough in depth 3-1/8"

Required article



xGRID Installation track 21.85" - 12 360 970 90

Recommended article




xGRID Mounting bracket for drywall construction - 12 340 970 90


LULU Concealed thermostat with one-way diverter - Chrome

36 425 710 Product version up to 8/24/2020

mm [inches]

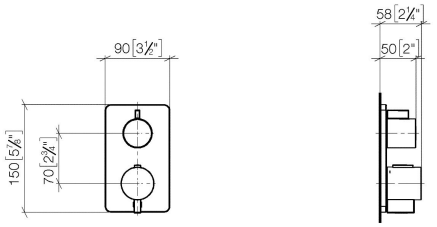

Flow rate chart

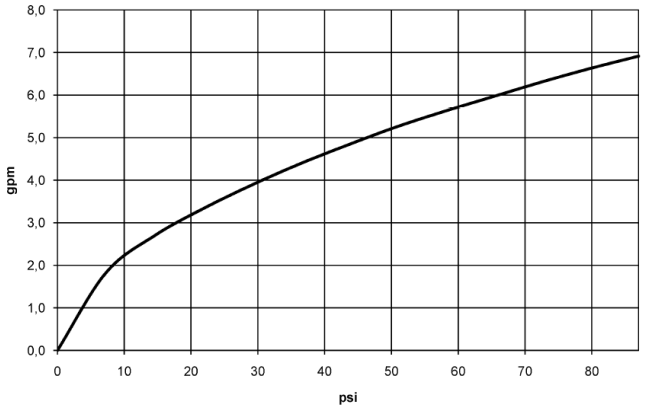

Codes & Standards

ADA	ASME A112.18.1	cUPC

LULU Concealed thermostat with one-way diverter - Chrome

36 425 710 Product version up to 8/24/2020


Certificates and sustainability

IAPMO_4976 (	EPD-DOR-20230287-IBA1-EN Environmental.product-declarat

DORN BRACHT

LULU Concealed thermostat with one-way diverter - Chrome

36 425 710 Product version up to 8/24/2020

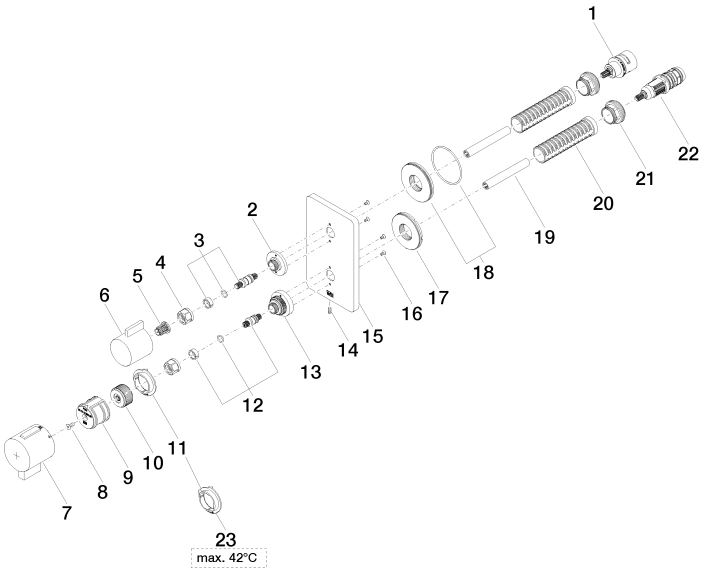

DORN BRACHT

LULU Concealed thermostat with one-way diverter - Chrome

36 425 710 Product version up to 8/24/2020

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
17	09 30 01 296 90	disc	1.00	14
5	90 12 12 002 00 90	fixing cap	1.00	14
14	09 31 11 134 90	pin	1.00	14
23	09 28 10 189 90	regulator	1.00	14
15	09 11 02 246-00	plate	1.00	26
22	90 15 02 013 00 90	cartridge	1.00	14
18	90 30 01 190 00 90	disc	1.00	14
16	09 30 30 157 90	screw	4.00	14
1	90 90 03 166 00 90	top	1.00	14
10	09 12 12 054 90	base	1.00	14
2	09 12 12 053-00	base	1.00	26
13	09 12 12 051-00	base	1.00	26
6	09 20 67 006-00	handle	1.00	82
7	90 17 33 019 00-00	handle	1.00	26
11	09 28 10 190 90	regulator	1.00	14
21	09 24 04 257 90	nut	2.00	14
19	90 23 01 124 00 90	sleeve	2.00	14
9	90 12 12 052 00 90	base	1.00	14
4	90 23 30 023 00 90	nut	2.00	14
20	90 18 40 077 01 90	spindle	2.00	14
8	90 30 30 124 00 90	screw	1.00	14
12	04 29 06 024 01-00	spindle	1.00	26
3	04 29 06 111 01-00	spindle	1.00	26