DORN BRACHT

# Concealed thermostat with one-way diverter - Chrome

SERIES SPECIFIC

36 425 970 Product version up to 8/24/2020



- Cover plate Ø 5-7/8"
- Temperature control handle with safety lock at 100 °F/ 38°C
- Max. temperature can be set on the trim

**(ADA)**

(ADA)

| | |
|---|---|
| Chrome | 36 425 970-00 0010 |
| Brushed Platinum | 36 425 970-06 0010 |
| Platinum | 36 425 970-08 0010 |
| Dark Chrome | 36 425 970-19 0010 |
| Light Gold (PVD) | 36 425 970-26 0010 |
| Brushed Light Gold (PVD) | 36 425 970-27 0010 |
| Brushed Durabrass (23kt Gold) | 36 425 970-28 0010 |
| Matte Black | 36 425 970-33 0010 |
| Brushed Gold (PVD) | 36 425 970-37 0010 |
| Brushed Dark Brass (PVD) | 36 425 970-39 0010 |
| Brushed Bronze (PVD) | 36 425 970-42 0010 |
| Brushed Dark Bronze (PVD) | 36 425 970-43 0010 |
| Brushed Champagne (22kt Gold) | 36 425 970-46 0010 |
| Champagne (22kt Gold) | 36 425 970-47 0010 |
| Brushed Chrome | 36 425 970-93 0010 |
| Brushed Dark Platinum | 36 425 970-99 0010 |

## Required article



**Concealed thermostat for one- and two-way outlets -** 35 426 970-90 0010
- Max. rough in depth 5-3/8"
- Min. rough in depth 3-1/8"

## Required article



**xGRID Installation track 21.85" -** 12 360 970 90

## Recommended article



**xGRID Mounting bracket for drywall construction -** 12 340 970 90


DORN BRACHT

# Concealed thermostat with one-way diverter - Chrome


SERIES SPECIFIC

36 425 970 Product version up to 8/24/2020

mm [inches]

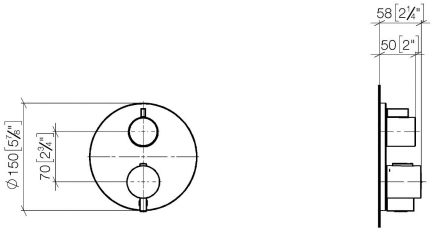


## Flow rate chart

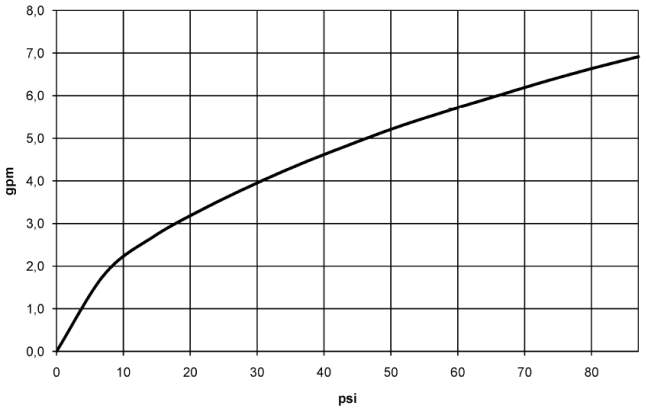


## Codes & Standards

| | | |
|---|---|---|
| ADA | ASME A112.18.1 | cUPC |

## Certificates and sustainability


| | |
|---|---|
| IAPMO_4976 ( | EPD-DOR-20230287 -IBA1-EN Environmental.product-declarat |

DORN BRACHT

# Concealed thermostat with one-way diverter - Chrome

SERIES SPECIFIC

36 425 970 Product version up to 8/24/2020

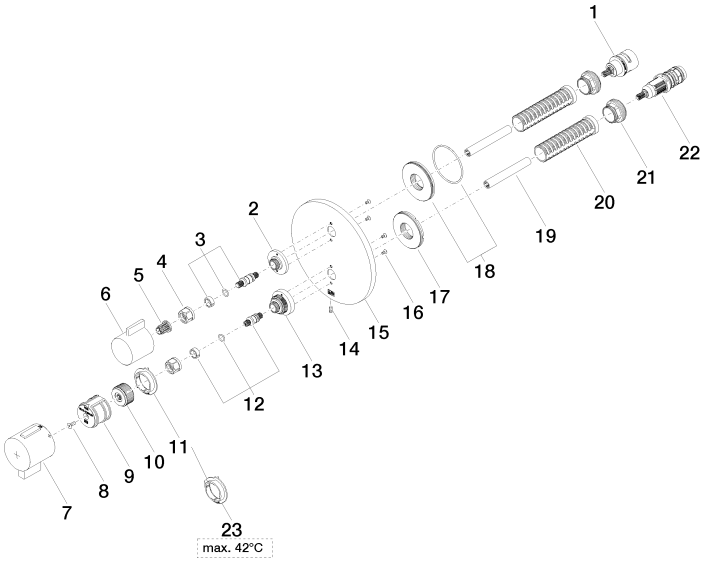

DORN BRACHT

# Concealed thermostat with one-way diverter - Chrome

SERIES SPECIFIC

36 425 970 Product version up to 8/24/2020

## Spare parts list

| Number | Item Number | Designation | Number of units | Lead time |
|---|---|---|---|---|
| 17 | 09 30 01 296 90 | disc | 1.00 | 14 |
| 5 | 90 12 12 002 00 90 | fixing cap | 1.00 | 14 |
| 14 | 09 31 11 134 90 | pin | 1.00 | 14 |
| 22 | 90 15 02 013 00 90 | cartridge | 1.00 | 14 |
| 16 | 09 30 30 157 90 | screw | 4.00 | 14 |
| 6 | 09 20 67 006-00 | handle | 1.00 | 82 |
| 13 | 09 12 12 051-00 | base | 1.00 | 26 |
| 2 | 09 12 12 053-00 | base | 1.00 | 26 |
| 11 | 09 28 10 190 90 | regulator | 1.00 | 14 |
| 21 | 09 24 04 257 90 | nut | 2.00 | 14 |
| 7 | 90 17 33 019 00-00 | handle | 1.00 | 26 |
| 23 | 09 28 10 189 90 | regulator | 1.00 | 14 |
| 18 | 90 30 01 190 00 90 | disc | 1.00 | 14 |
| 15 | 09 11 02 242-00 | plate | 1.00 | 26 |
| 10 | 09 12 12 054 90 | base | 1.00 | 14 |
| 1 | 90 90 03 166 00 90 | top | 1.00 | 14 |
| 4 | 90 23 30 023 00 90 | nut | 2.00 | 14 |
| 9 | 90 12 12 052 00 90 | base | 1.00 | 14 |
| 19 | 90 23 01 124 00 90 | sleeve | 2.00 | 14 |
| 3 | 04 29 06 111 01-00 | spindle | 1.00 | 26 |
| 8 | 90 30 30 124 00 90 | screw | 1.00 | 14 |
| 20 | 90 18 40 077 01 90 | spindle | 2.00 | 14 |
| 12 | 04 29 06 024 01-00 | spindle | 1.00 | 26 |