





36 426 845 Product version from 6/30/2022




- Diverter with integrated volume control
- Cover plate 5-7/8" x 3-1/2"
- Temperature control handle with safety lock at 100 °F/ 38°C
- Max. temperature can be set on the trim
- single flow function only

	Matte Black	36 426 845-33 0010
	Chrome	36 426 845-00 0010
	Brushed Platinum	36 426 845-06 0010
	Dark Chrome	36 426 845-19 0010
	Brushed Light Gold	36 426 845-27 0010
	Brushed Chrome	36 426 845-93 0010
	Brushed Dark Platinum	36 426 845-99 0010


**Required article**

	<b>Concealed thermostat for one- and two-way outlets -</b> •Max. rough in depth 5-3/8" •Min. rough in depth 3-1/8"	35 426 970-90 0010
---	--	--------------------


**Recommended article**

	<b>xGRID Mounting bracket for drywall construction -</b>	12 340 970 90
---	--	---------------

**Required article**


	<b>xGRID Installation track 21.85" -</b>	12 360 970 90
---	--	---------------

**Recommended article**

	<b>Concealed wall elbow -</b> •Min. rough in depth " •Max. rough in depth "	35 085 970-90 0010
---	---	--------------------

36 426 845 Product version from 6/30/2022

mm [inches]

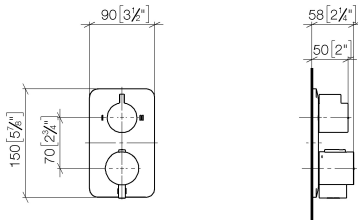

#### Codes & Standards

ADA

California Energy  
Commission  
(CEC)

