








36 428 845 Product version from 6/30/2022




- rotary diverter with volume control and shut-off function
- cover plate 150 x 90 mm
- hot water temperature limiter, can be preset
- temperature control handle with safety limit stop at 38°C
- single flow function only

	Matte Black	36 428 845-33 0010
	Chrome	36 428 845-00 0010
	Brushed Platinum	36 428 845-06 0010
	Dark Chrome	36 428 845-19 0010
	Brushed Light Gold	36 428 845-27 0010
	Brushed Chrome	36 428 845-93 0010
	Brushed Dark Platinum	36 428 845-99 0010


Required miscellaneous

	Concealed thermostat for three-way outlets - •max. recess depth 136 mm •min. recess depth 80 mm	35 428 970-90 0010
---	--	--------------------


Required miscellaneous

	xGRID Installation track 555 mm -	12 360 970 90
---	--	---------------

Recommended miscellaneous

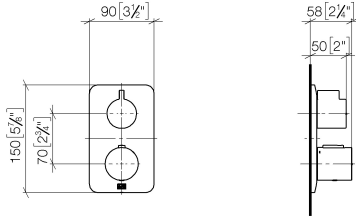
	xGRID Attachment set for integrating in the dry wall construction -	12 340 970 90
---	--	---------------

Recommended miscellaneous

	Concealed wall elbow - •min. recess depth mm •max. recess depth mm	35 085 970-90 0010
---	---	--------------------

36 428 845 Product version from 6/30/2022

mm [inches]



Codes & Standards

ADA

California Energy
Commission
(CEC)

