

# HUNLEY BRIDGE FAUCET 12" ARTICULATED SPOUT

## Model # 7600-12



### PRODUCT DESCRIPTION


- Compatible with Reverse Osmosis filtration systems.
- Articulated with 12" reach.
- 1.75 gpm maximum flow rate.
- Aerated stream.
- Solid brass or stainless steel construction.
- Lever handles.
- Spout swivels 360 degrees.
- Reversible or removable Hot/Cold indicator ring.
- Equipped with diverter for optional side spray.
- Reinforced braided connection hoses.

### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- NSF 61, 372
- CALGreen
- ADA Compliant

- Max Counter Thickness 2-3/8"
- Minimum Install Hole Size 1-3/8"

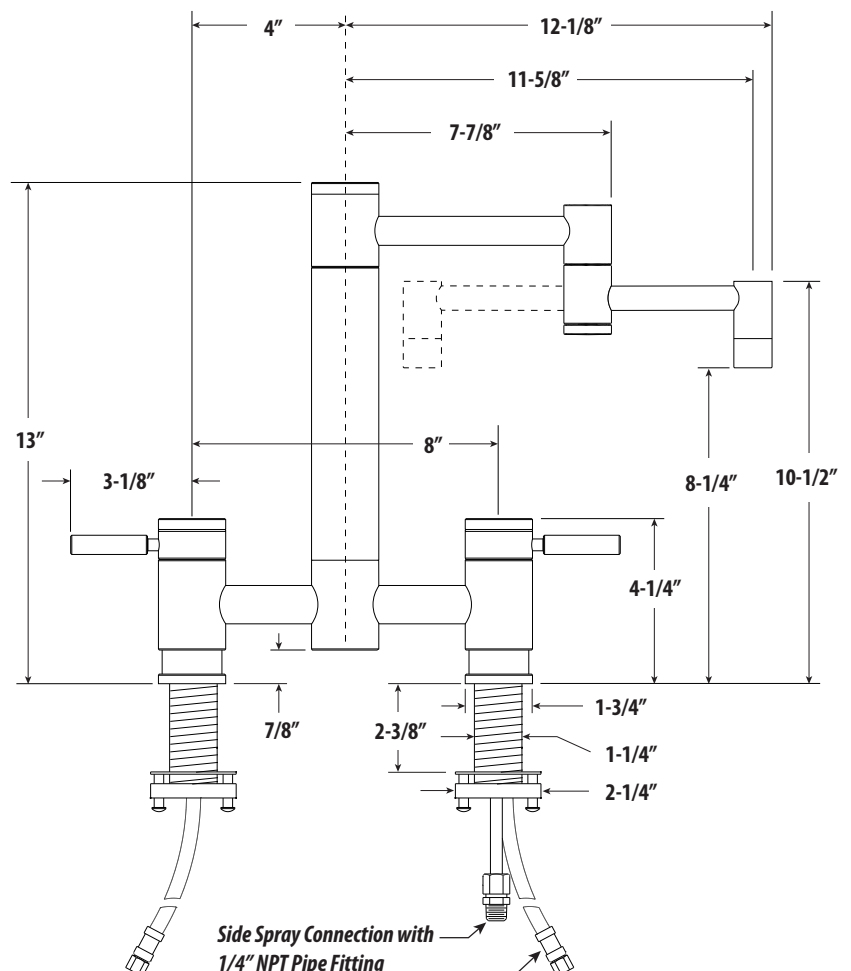

Side Spray Connection with  
1/4" NPT Pipe Fitting

Supply Hoses - 20" Long with  
3/8" Compression Fittings



DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA

## AVAILABLE IN 32 FINISHES + SOLID STAINLESS STEEL

Almond - 01	Black Nickel - BLN	Distressed Antique Copper - DAC	Polished Gold - PG	Unlaquered Polished Brass - UPB
Antique Brass - AB	Black-Oil Rubbed Bronze - ORB	Distressed American Bronze - DAMB	Polished Nickel - PN	Venetian Bronze - VB
Antique Bronze - ABZ	Biscuit - 07	Distressed Antique Pewter - DAP	Satin Chrome - SC	Weathered Brass - WB
Antique Copper - AC	Caribbean Bronze - CB	Euro-White - EW	Satin Gold - SG	Weathered Copper - WC
American Bronze - AMB	Chocolate Bronze - CHB	Matte Black - MB	Satin Nickel - SN	White - WT
Antique Pewter - AP	Chrome - CH	Polished Brass - PB	Stainless Steel - SS*	
Black - 06	Distressed Antique Brass - DAB	Polished Copper - PC	Tuscan Brass - TB	

\*Contemporary Styles Only