FULTON BRIDGE FAUCET W/ SIDE SPRAY

Model # 7825-1

- Max Counter Thickness 2-3/8”
- Minimum Install Hole Size 1-3/8"

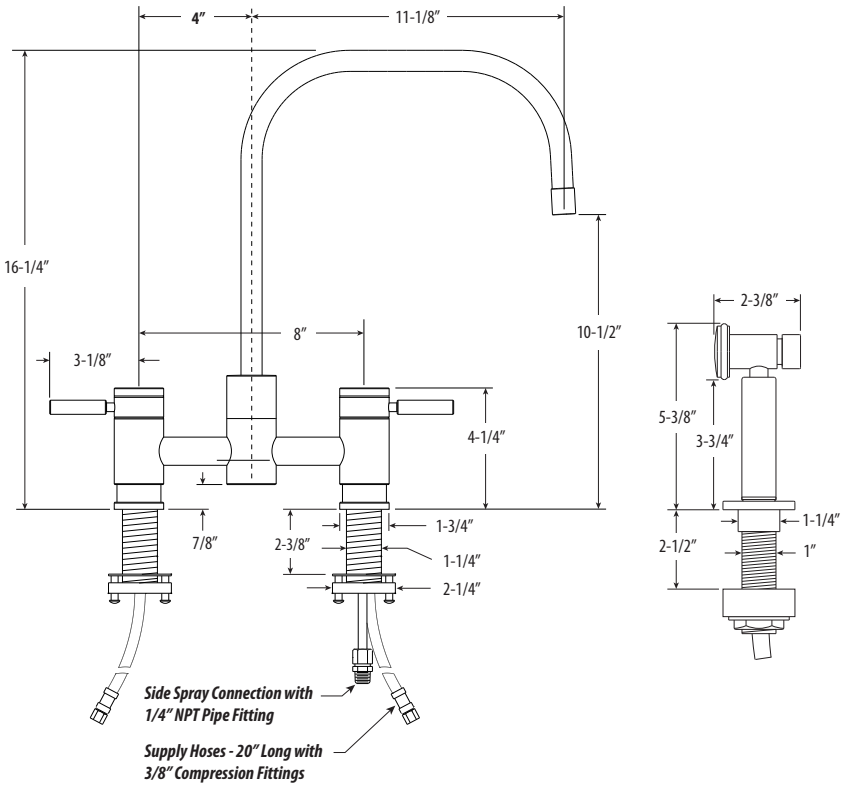

ECO BRASS
HIGH PERFORMANCE LEAD FREE BRASS

DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA

PRODUCT DESCRIPTION

- Suite includes Side Spray.
- Two-holed Bridge Faucet design.
- Part of the Fulton Contemporary Suite.
- 2 Bend U-Spout with **11-1/8”** reach.
- 360 degree swivel spout.
- Equipped with diverter for optional side spray.
- Solid brass or stainless steel construction.
- Double lever handles.
- 1.75 gpm maximum flow rate.
- Aerated stream.
- Compatible with Reverse Osmosis filtration systems.
- Reversible or removable Hot/Cold indicator rings.
- Reinforced braided connection hoses.
- Lifetime Functional Warranty.
- Made in the USA.

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- **ASME A112.18.1**
- **CSA B125.1**
- **NSF 61, 372**
- **CALGreen**
- **ADA Compliant**

AVAILABLE IN 29 FINISHES + SOLID STAINLESS STEEL

Antique Brass - AB
Antique Bronze - ABZ
Antique Copper - AC
American Bronze - AMB
Antique Pewter - AP
Gloss Black - GB
Black Nickel - BLN
Black-Oil Rubbed Bronze - ORB
Caribbean Bronze - CB
Chocolate Bronze - CHB
Chrome - CH
Distressed Antique Brass - DAB
Distressed Antique Copper - DAC
Distressed American Bronze - DAMB
Distressed Antique Pewter - DAP
Matte Black - MB
Polished Brass - PB
Polished Copper - PC
Polished Gold - PG
Polished Nickel - PN
Satin Chrome - SC
Satin Gold - SG
Satin Nickel - SN
*Stainless Steel - SS**
Tuscan Brass - TB
Unlaquered Polished Brass - UPB
Venetian Bronze - VB
Weathered Brass - WB
Weathered Copper - WC