


Submitted Model No.: _____

Specific Features: _____

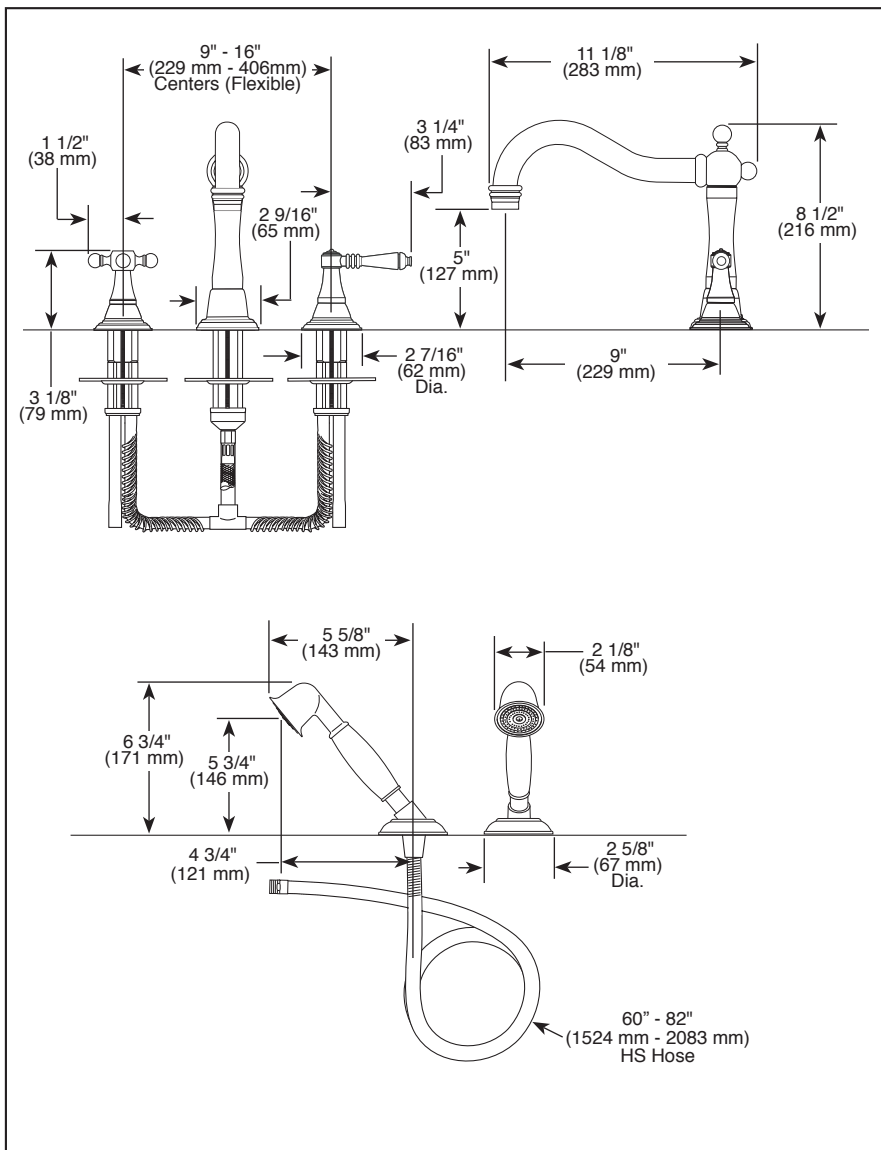

▲ Designate Proper Finish Suffix

BRIZO®

ROMAN TUB/WHIRLPOOL FAUCET TRIM

- Tresa® Bath Collection
- Three Hole Installation (T67336 & T67338 Series)
- Four Hole Installation (T67436 & T67438 Series)
- Rough-In Kit Must Also be Ordered to Complete Installation (R64707 for Four Hole and R62707 for Three Hole)

STANDARD SPECIFICATIONS:

- Trim Only for two handle Roman Tub faucet for concealed mounting
- Temperature and volume controlled with handles.
- Rough-In kit must also be ordered to complete installation (R64707 for four hole and R62707 for three hole). There are separate specification sheets on each rough-in kit if more details are required.
- Handshower flows 2.0 gpm @ 80 psi
- Minimum 4 1/2" (114 mm) to maximum 8" (203 mm) distance between holes
- Accommodates up to 2 1/2" deck thickness.
- 60" - 82" (1524 mm - 2083 mm) stretchable finished metal hose

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ☑ Indicates compliance to ICC/ANSI A117.1 - Valve control only

