



California Faucets®


TIBURON™

DELUXE WALL TUB SPOUT

Features

- 8-1/2" to center spout projection
- Max flow rate: 16 gpm (60.6 L/min)
- For use with StyleTherm, 3-VR or 2-VR valves
- Solid brass construction
- Over 30 finishes including 15 PVD finishes

D-65

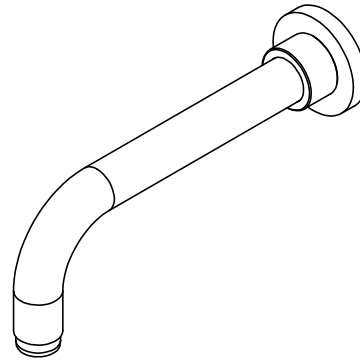

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1

THROUGH-HOLE SPECIFICATIONS

MIN	RECOMMENDED	MAX
Ø 1"	Ø 1-1/4"	Ø 1-15/16"

