



Features


- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- 16gpm (60.6 L/min) max flow rate at 60 psi
- For use with StyleTherm, StyleTherm Vista, PB2-R or 2-VR



Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1

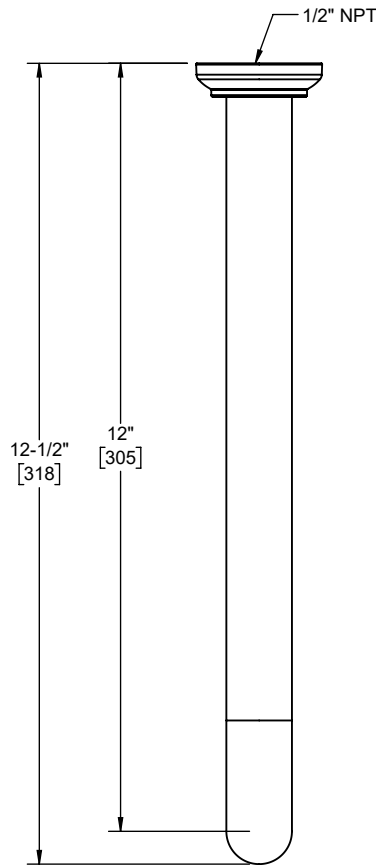

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	MAX
Ø1" [25]	Ø1-1/4" [32]	Ø1-15/16" [50]

