


artos[®]

F202-6

TECHNICAL SPECIFICATIONS

quarto 3-hole deck mount tub
filler, cube control

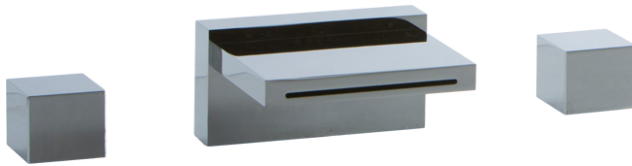

FEATURES

Front Ribbon Water Flow

OPERATING PRESSURE

Minimum: 15 psi

Maximum: 75 psi

Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW RATE

Tub Filler: 15.0 USGPM

artos[®]

F202-6

PRODUCT DIMENSIONS

quarto 3-hole deck mount tub
filler, cube control

