

## PREFAB Shower Floor Kit 32"

### QM PREFAB SHOWER FLOOR | Shower pan:



- 100% Post-Consumer Recycled PET with a recyclable Superdry membrane.
- Pre-Sealed Superdry Waterproofing
- Pre Sloped
- 140 psi compressive strength,.
- Wide Drain Support
- Easily trim or expand with dry-pack mortar.
- UV resistant and built to withstand indoor and outdoor use.

#### Kit includes:

- Shower Pan
- Drain support
- Linear Drain
- Band
- Inside and Outside Corners
- Coupling



### Shower Pan Specifications

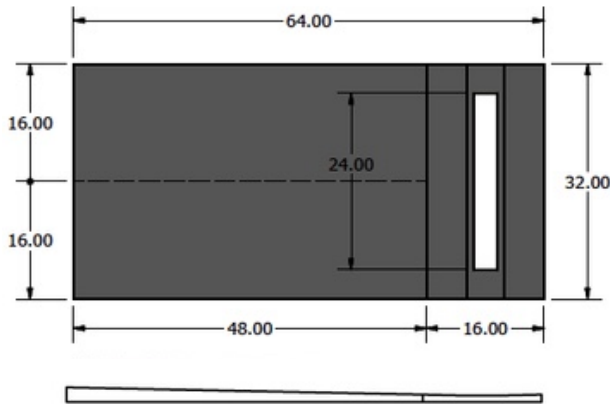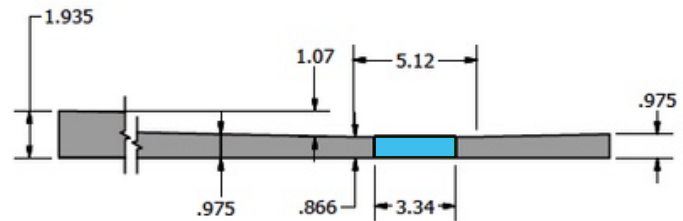

### Drain: Delmar Delta 24"

#### Flange Edge (Vertical Outlet)



SP32.33.300.24F BK ●  
SP32.33.300.24F BZ ●  
SP32.33.300.24F GD ●  
SP32.33.300.24F PS ●  
SP32.33.300.24F ST ●

#### Flange Edge (Side Outlet)



SP32.33.300.24FSO BK ●  
SP32.33.300.24FSO BZ ●  
SP32.33.300.24FSO GD ●  
SP32.33.300.24FSO PS ●  
SP32.33.300.24FSO ST ●



Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer. Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superseded or voided data. [Contact us if you have any question at: info@qm-us.com](mailto:info@qm-us.com)

## PREFAB Shower Floor Kit 40"

### QM PREFAB SHOWER FLOOR | Shower pan:



- 100% Post-Consumer Recycled PET with a recyclable Superdry membrane.
- Pre-Sealed Superdry Waterproofing
- Pre Sloped
- 140 psi compressive strength,.
- Wide Drain Support
- Easily trim or expand with dry-pack mortar.
- UV resistant and built to withstand indoor and outdoor use.

#### Kit includes:

- Shower Pan
- Drain support
- Linear Drain
- Band
- Inside and Outside Corners
- Coupling



### Shower Pan Specifications

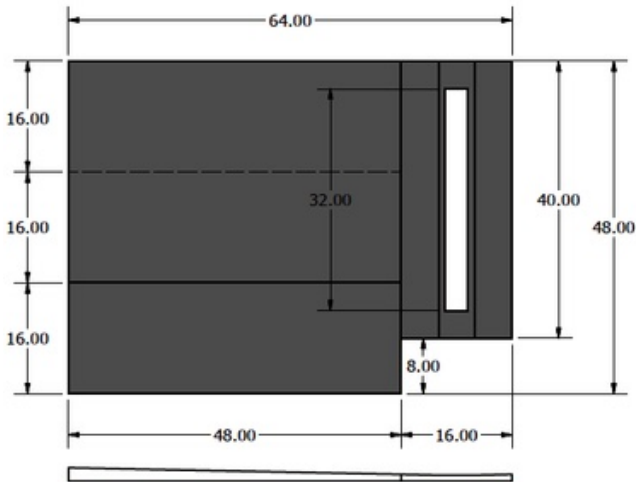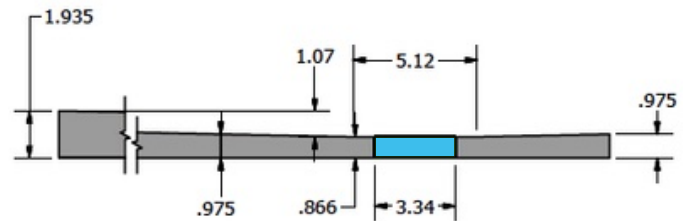

### Drain: Delmar Delta 32"

#### Flange Edge (Vertical Outlet)



- SP40.33.300.32F BK ●
- SP40.33.300.32F BZ ●
- SP40.33.300.32F GD ●
- SP40.33.300.32F PS ●
- SP40.33.300.32F ST ●

#### Flange Edge (Side Outlet)



- SP40.33.300.32FSO BK ●
- SP40.33.300.32FSO BZ ●
- SP40.33.300.32FSO GD ●
- SP40.33.300.32FSO PS ●
- SP40.33.300.32FSO ST ●



Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer. Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superseded or voided data. [Contact us if you have any question at: info@qm-us.com](mailto:info@qm-us.com)

## PREFAB Shower Floor Kit 48"

### QM PREFAB SHOWER FLOOR | Shower pan:



- 100% Post-Consumer Recycled PET with a recyclable Superdry membrane.
- Pre-Sealed Superdry Waterproofing
- Pre Sloped
- 140 psi compressive strength,.
- Wide Drain Support
- Easily trim or expand with dry-pack mortar.
- UV resistant and built to withstand indoor and outdoor use.

#### Kit includes:

- Shower Pan
- Drain support
- Linear Drain
- Band
- Inside and Outside Corners
- Coupling



### Shower Pan Specifications

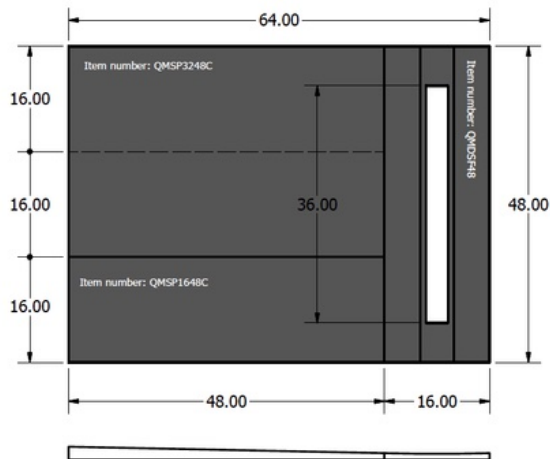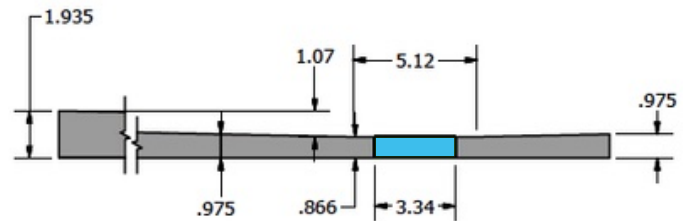

### Drain: Delmar Delta 36"

#### Flange Edge (Vertical Outlet)



- SP48.33.300.36F BK
- SP48.33.300.36F BZ
- SP48.33.300.36F GD
- SP48.33.300.36F PS
- SP48.33.300.36F ST

#### Flange Edge (Side Outlet)



- SP48.33.300.36FSO BK
- SP48.33.300.36FSO BZ
- SP48.33.300.36FSO GD
- SP48.33.300.36FSO PS
- SP48.33.300.36FSO ST




Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer. Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superseded or voided data. [Contact us if you have any question at: info@qm-us.com](mailto:info@qm-us.com)

## PREFAB Shower Floor Kit 58"

### QM PREFAB SHOWER FLOOR | Shower pan:



- 100% Post-Consumer Recycled PET with a recyclable Superdry membrane.
- Pre-Sealed Superdry Waterproofing
- Pre Sloped
- 140 psi compressive strength,.
- Wide Drain Support
- Easily trim or expand with dry-pack mortar.
- UV resistant and built to withstand indoor and outdoor use.

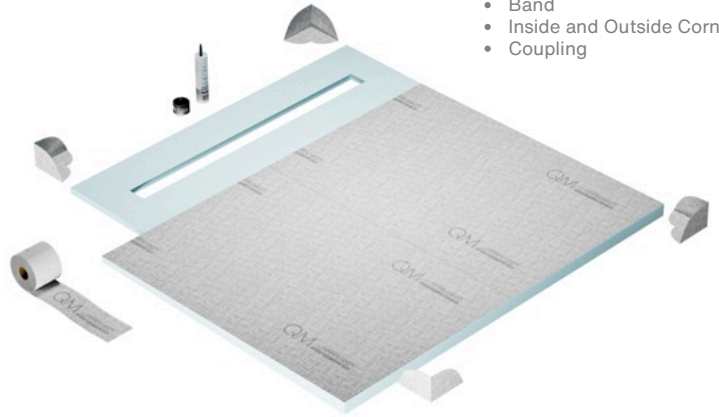

#### Kit includes:

- Shower Pan
- Drain support
- Linear Drain
- Band
- Inside and Outside Corners
- Coupling

### Shower Pan Specifications

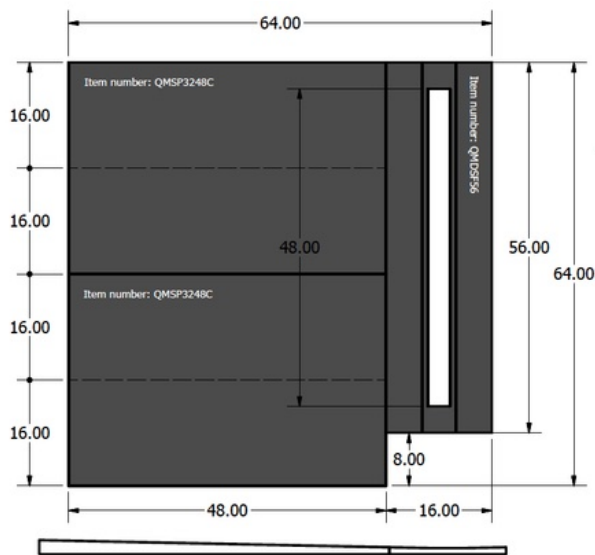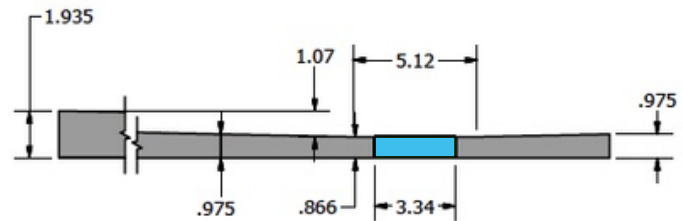

### Drain: Delmar Delta 48"

#### Flange Edge (Vertical Outlet)



- SP56.33.300.48F BK
- SP56.33.300.48F BZ
- SP56.33.300.48F GD
- SP56.33.300.48F PS
- SP56.33.300.48F ST

#### Flange Edge (Side Outlet)



- SP56.33.300.48FSO BK
- SP56.33.300.48FSO BZ
- SP56.33.300.48FSO GD
- SP56.33.300.48FSO PS
- SP56.33.300.48FSO ST



Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer. Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superseded or voided data. [Contact us if you have any question at: info@qm-us.com](mailto:info@qm-us.com)

## PREFAB Shower Floor Kit 64"

### QM PREFAB SHOWER FLOOR | Shower pan:



- 100% Post-Consumer Recycled PET with a recyclable Superdry membrane.
- Pre-Sealed Superdry Waterproofing
- Pre Sloped
- 140 psi compressive strength,.
- Wide Drain Support
- Easily trim or expand with dry-pack mortar.
- UV resistant and built to withstand indoor and outdoor use.



#### Kit includes:

- Shower Pan
- Drain support
- Linear Drain
- Band
- Inside and Outside Corners
- Coupling

### Shower Pan Specifications

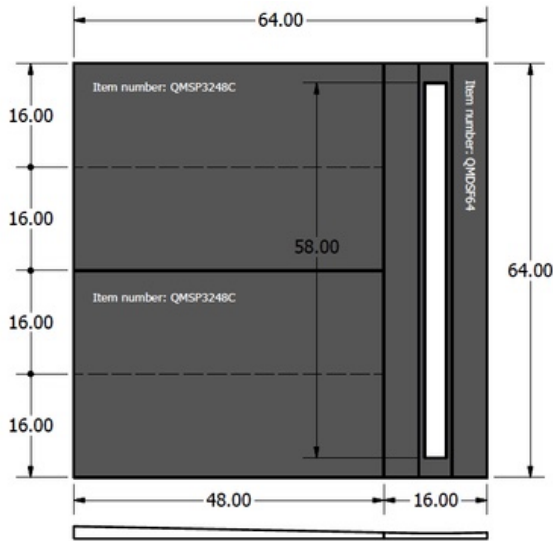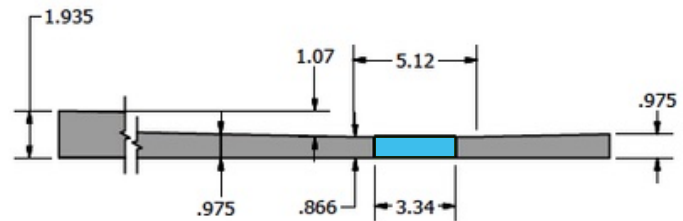

### Drain: Delmar Delta 48"

#### Flange Edge (Vertical Outlet)



SP64.33.300.58F BK  
SP64.33.300.58F BZ  
SP64.33.300.58F GD  
SP64.33.300.58F PS  
SP64.33.300.58F ST

#### Flange Edge (Side Outlet)



SP64.33.300.58FSO BK  
SP64.33.300.58FSO BZ  
SP64.33.300.58FSO GD  
SP64.33.300.58FSO PS  
SP64.33.300.58FSO ST




Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer. Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superseded or voided data. [Contact us if you have any question at: info@qm-us.com](mailto:info@qm-us.com)

## PREFAB Shower Floor Kit 80"

### QM PREFAB SHOWER FLOOR | Shower pan:



- 100% Post-Consumer Recycled PET with a recyclable Superdry membrane.
- Pre-Sealed Superdry Waterproofing
- Pre Sloped
- 140 psi compressive strength,.
- Wide Drain Support
- Easily trim or expand with dry-pack mortar.
- UV resistant and built to withstand indoor and outdoor use.

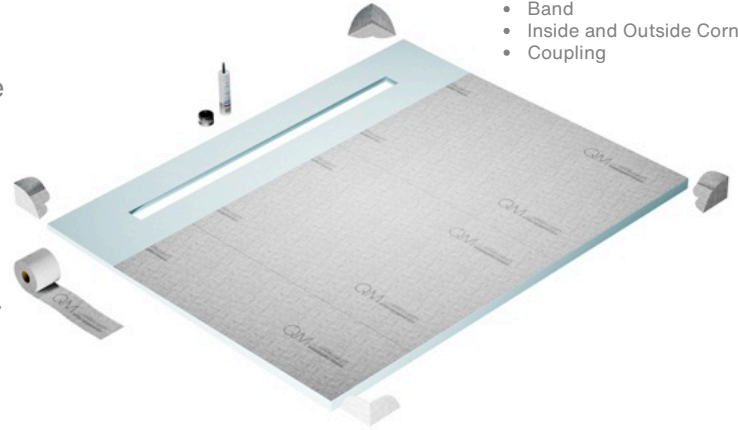

#### Kit includes:

- Shower Pan
- Drain support
- Linear Drain
- Band
- Inside and Outside Corners
- Coupling

### Shower Pan Specifications

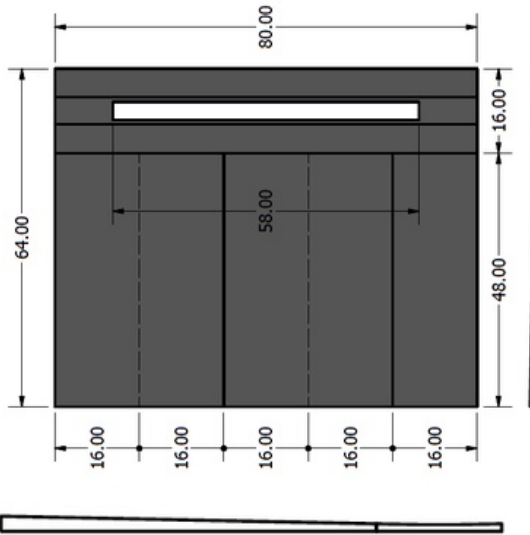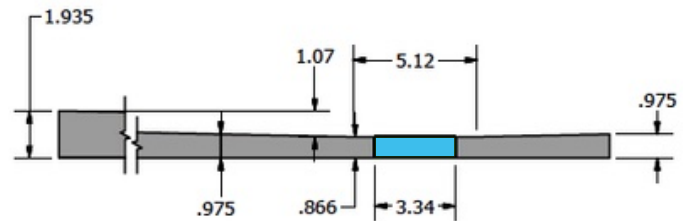

### Drain: Delmar Delta 48"

#### Flange Edge (Vertical Outlet)



- SP80.33.300.58F BK
- SP80.33.300.58F BZ
- SP80.33.300.58F GD
- SP80.33.300.58F PS
- SP80.33.300.58F ST

#### Flange Edge (Side Outlet)



- SP80.33.300.58FSO BK
- SP80.33.300.58FSO BZ
- SP80.33.300.58FSO GD
- SP80.33.300.58FSO PS
- SP80.33.300.58FSO ST



Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer. Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superseded or voided data. [Contact us if you have any question at: info@qm-us.com](mailto:info@qm-us.com)