




Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- 1/4 turn ceramic disc cartridge(s)
- 1.2gpm (4.5 L/min) max flow rate
- Rough valve (VL-R) sold separately

TO-V7002-9

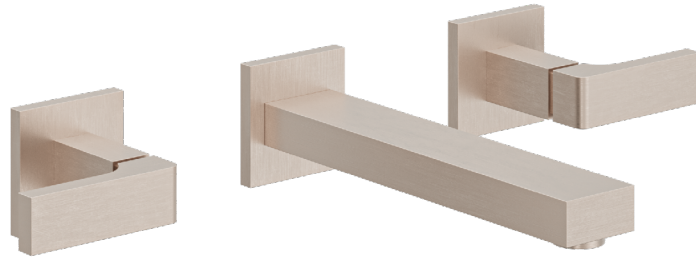

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC & DOE
- EPA WaterSense
- Commonwealth of MA
- ADA compliant

