

SHOWER
Exposed Thermostatic Shower
System w/Handshower (Rough &
Trim)
CD2.02-LC1S

GRAFF®



Information

- Showerhead, 20" Shower Arm, Flange
- Includes Matching Handshower w/Ceramic Handle
- Includes 59" long shower hose
- Optional Metal Handshower Handle - Use code CD2.12-***-**
- Flow rates: showerhead \leq 1.8 max gpm, handshower \leq 1.5 max gpm
- ADA
- CALGreen

SHOWER
Traditional 8" Showerhead
G-8410

GRAFF®




Information

- Sunflower shape
- 112 no-clog, easy-clean rubber spray nozzles
- Metal ball-joint allows for showerhead angle adjustment
- Showerhead flow rate ≤ 1.8 max gpm
- Recommend use with ceiling shower arm
- Recommended for use at no more than 10 degrees tilt
- CALGreen

Finishes



G-8410

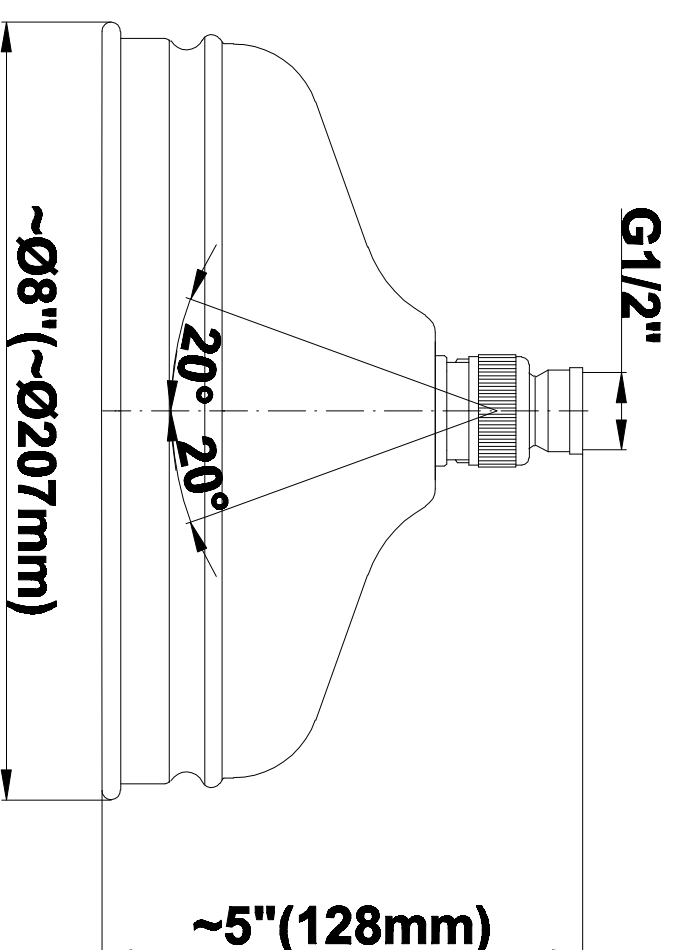


SHOWER
Exposed Thermostatic Valve
G-8900

GRAFF®





Finishes

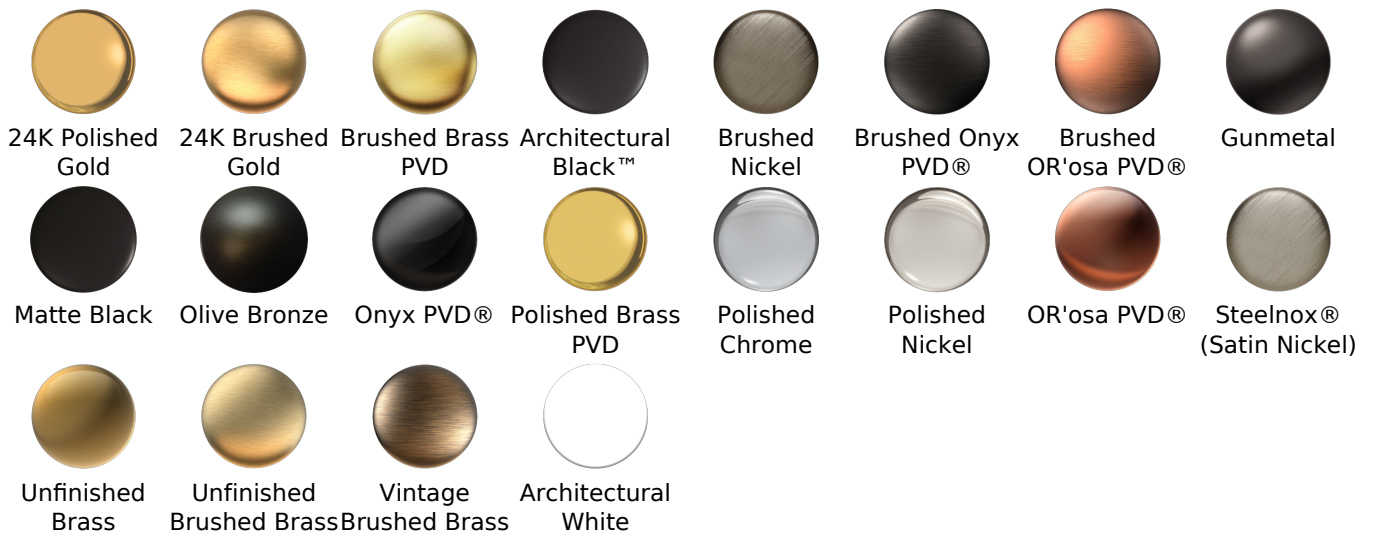

G-8900

Exposed Thermostatic Valve

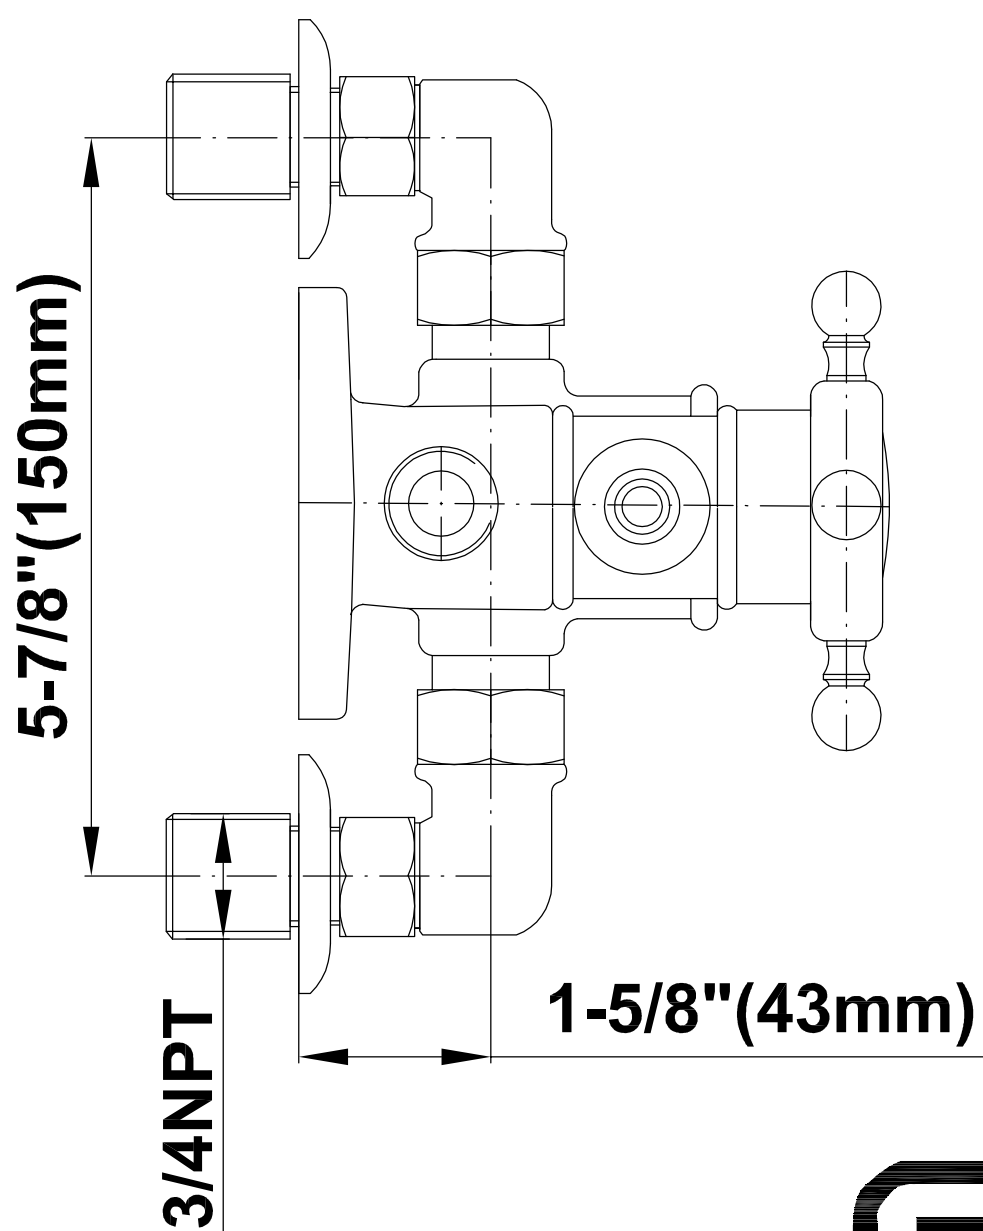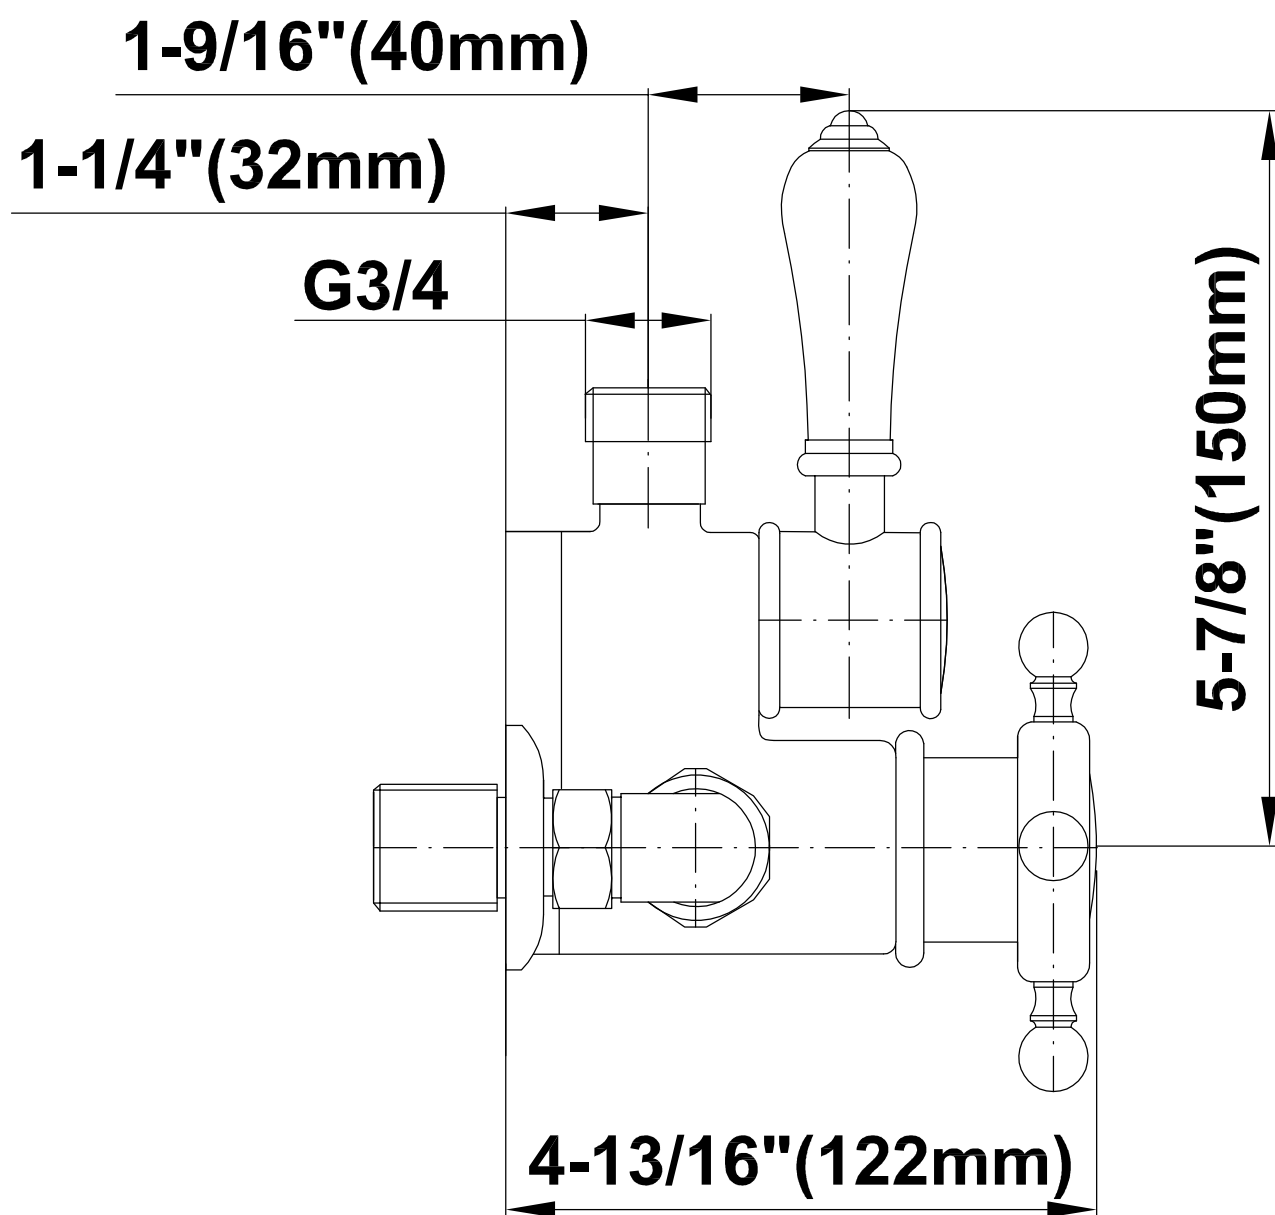

SHOWER
Exposed Riser with Handshower
G-8934-LC1S


GRAFF®



Information

- Includes Matching Handshower w/Ceramic Handle
- Includes 59" long shower hose
- Optional Metal Handshower Handle - Use code CD2.12_***_**
- CALGreen

Finishes

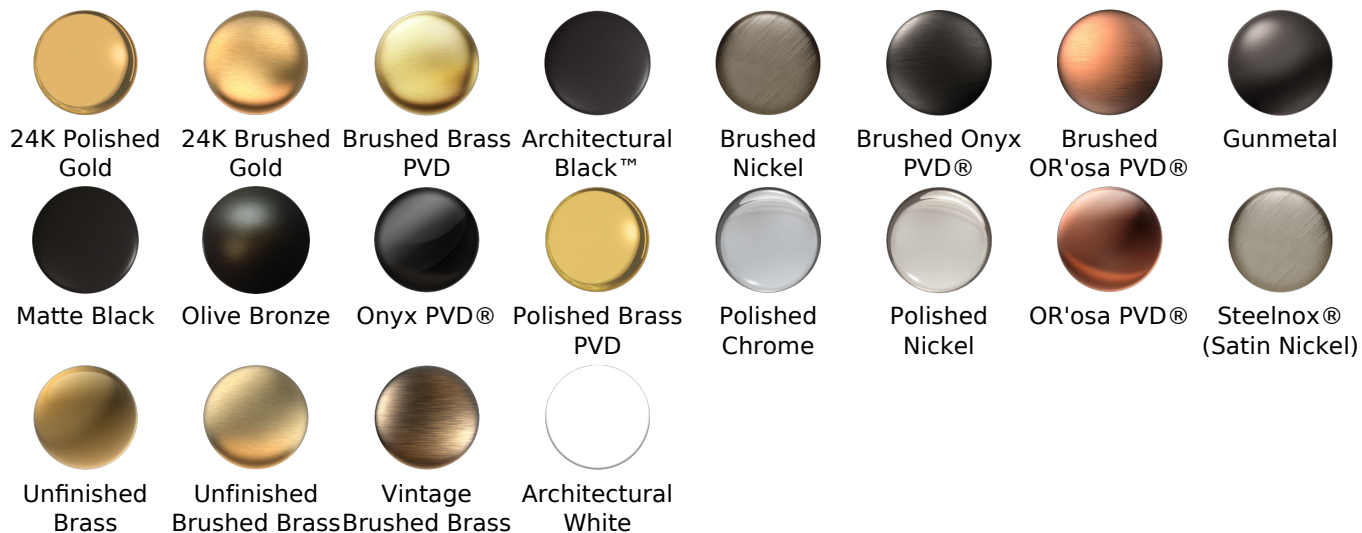

G-8934

Exposed Riser

