

PS140CL

Classic Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Hand Held Shower

artos®

OPERATING SPECIFICATIONS



OPERATING PRESSURE

Minimum: 15 psi

Maximum: 75 psi

Above 90 psi it may be necessary to
install a pressure reducer


OPERATING TEMPERATURE

Maximum 176°F

FLOW CAPACITY

Shower Head: 1.8 GPM

Hand Shower: 1.8 GPM

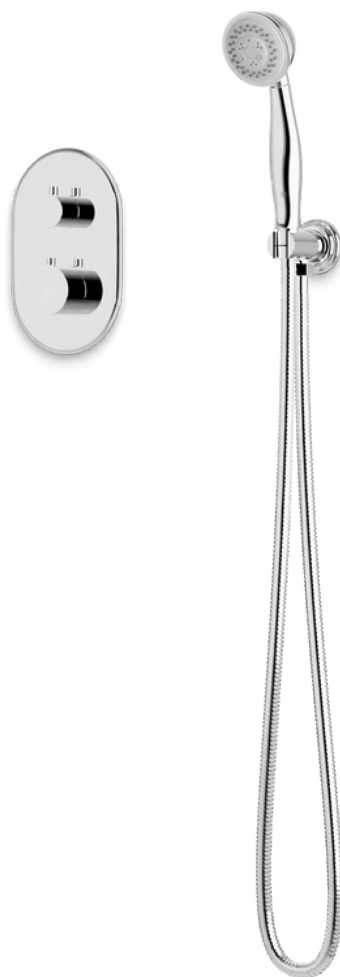

PS140CL


Classic Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Hand Held Shower

artos®

PRODUCT DIMENSIONS

PRODUCT SKU

F903B-62TK

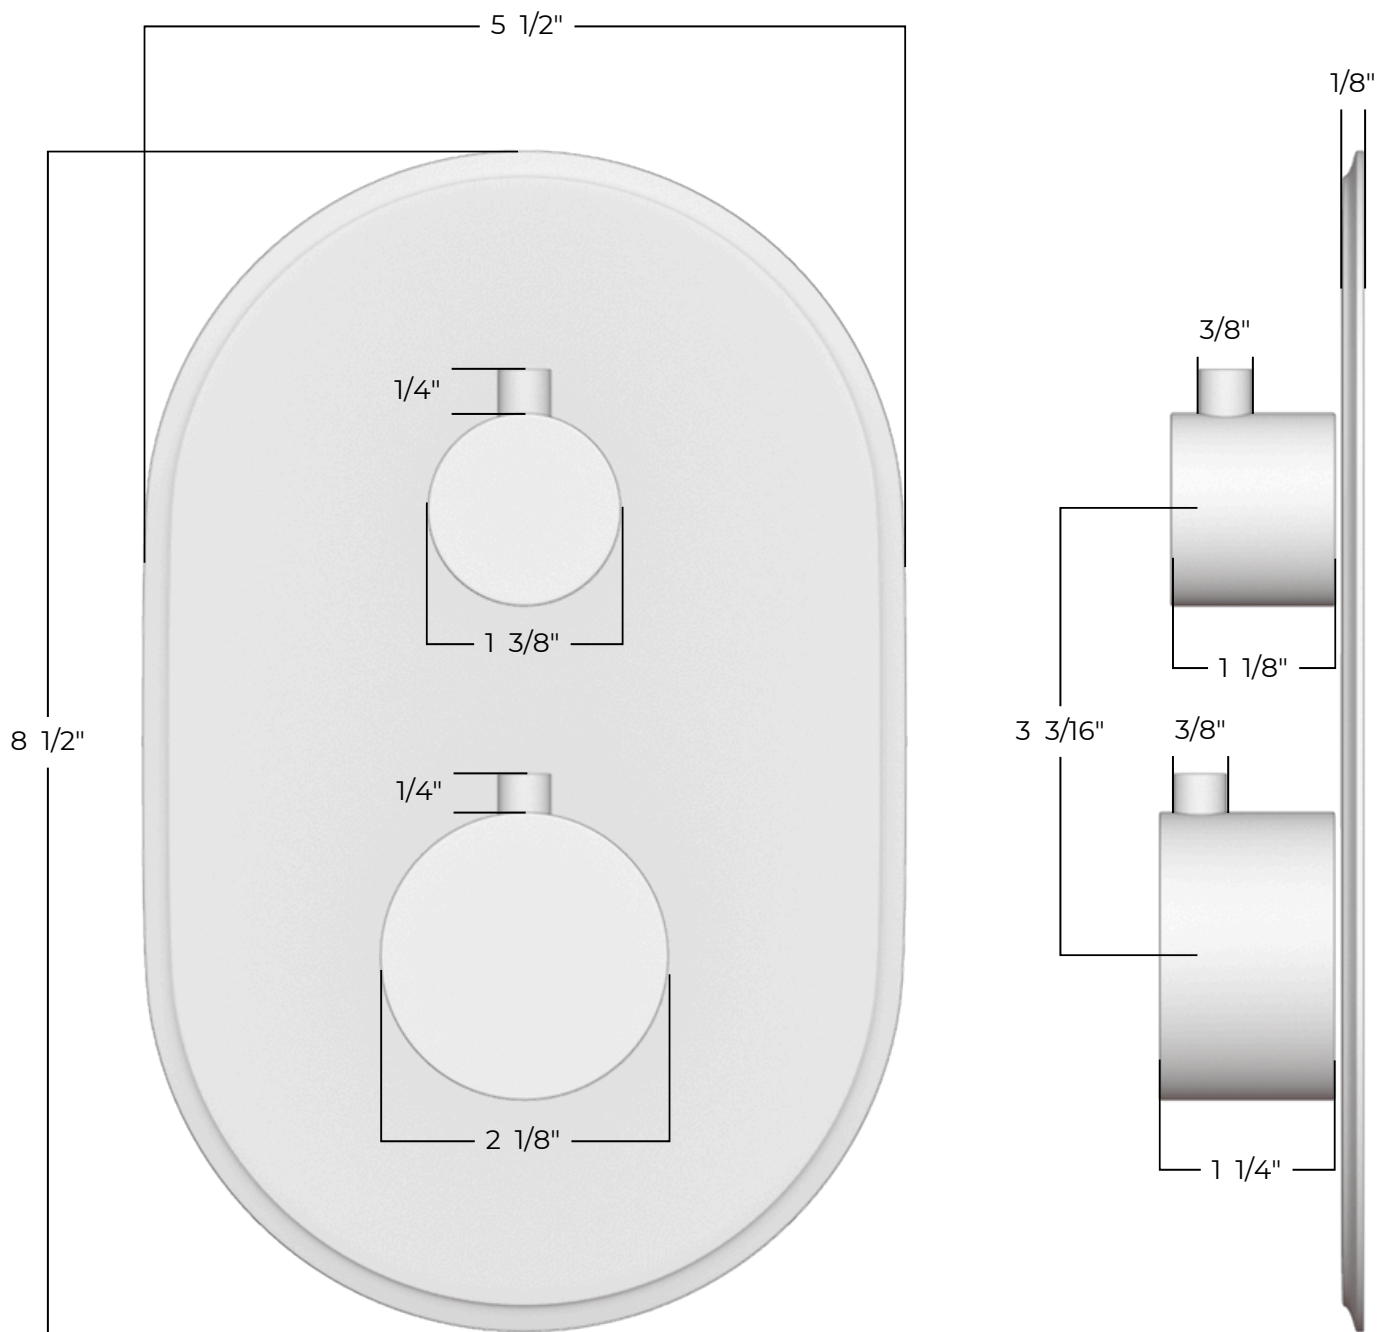

PS140CL


Classic Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Hand Held Shower

artos®

PRODUCT DIMENSIONS

PRODUCT SKU

F902-1CL

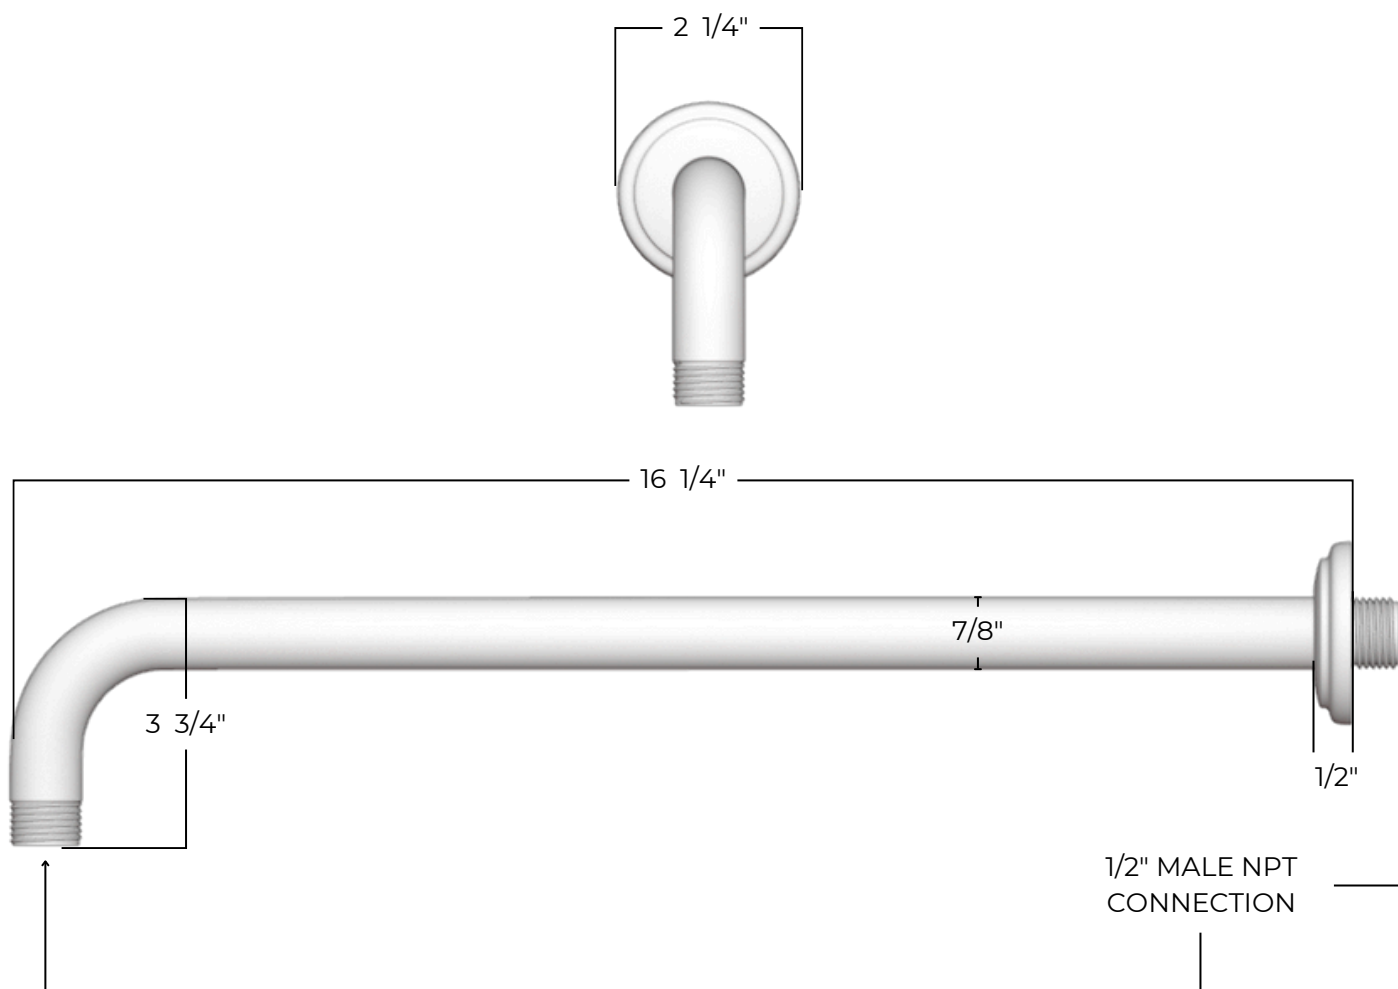

PS140CL



artos®

Classic Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Hand Held Shower

PRODUCT DIMENSIONS

PRODUCT SKU

F901-22

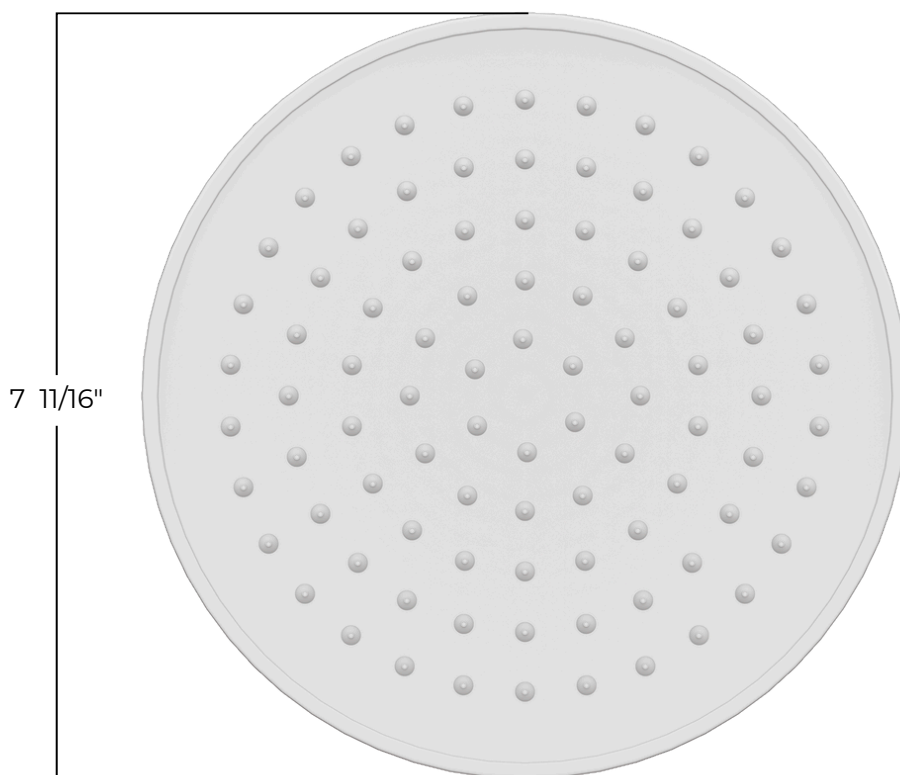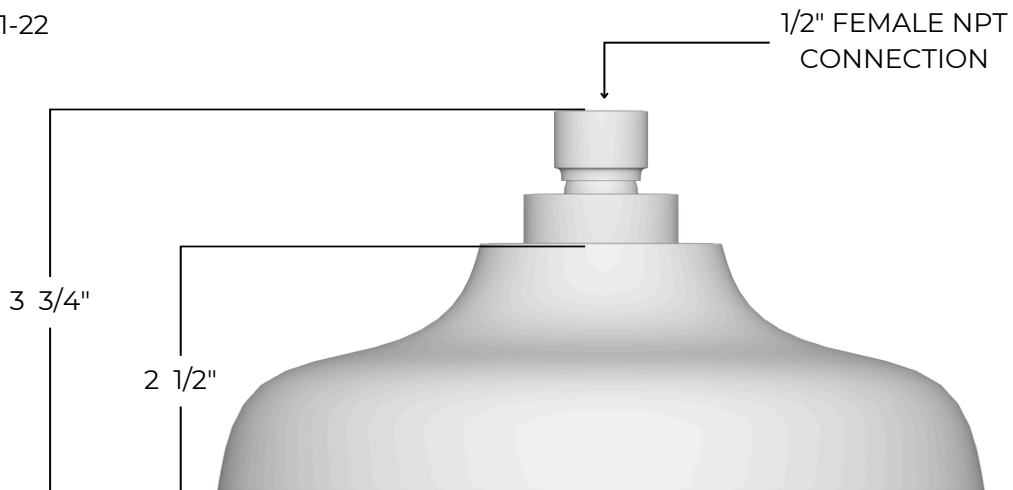

PS140CL


Classic Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Hand Held Shower

artos®

PRODUCT DIMENSIONS

PRODUCT SKU

F902-42CL

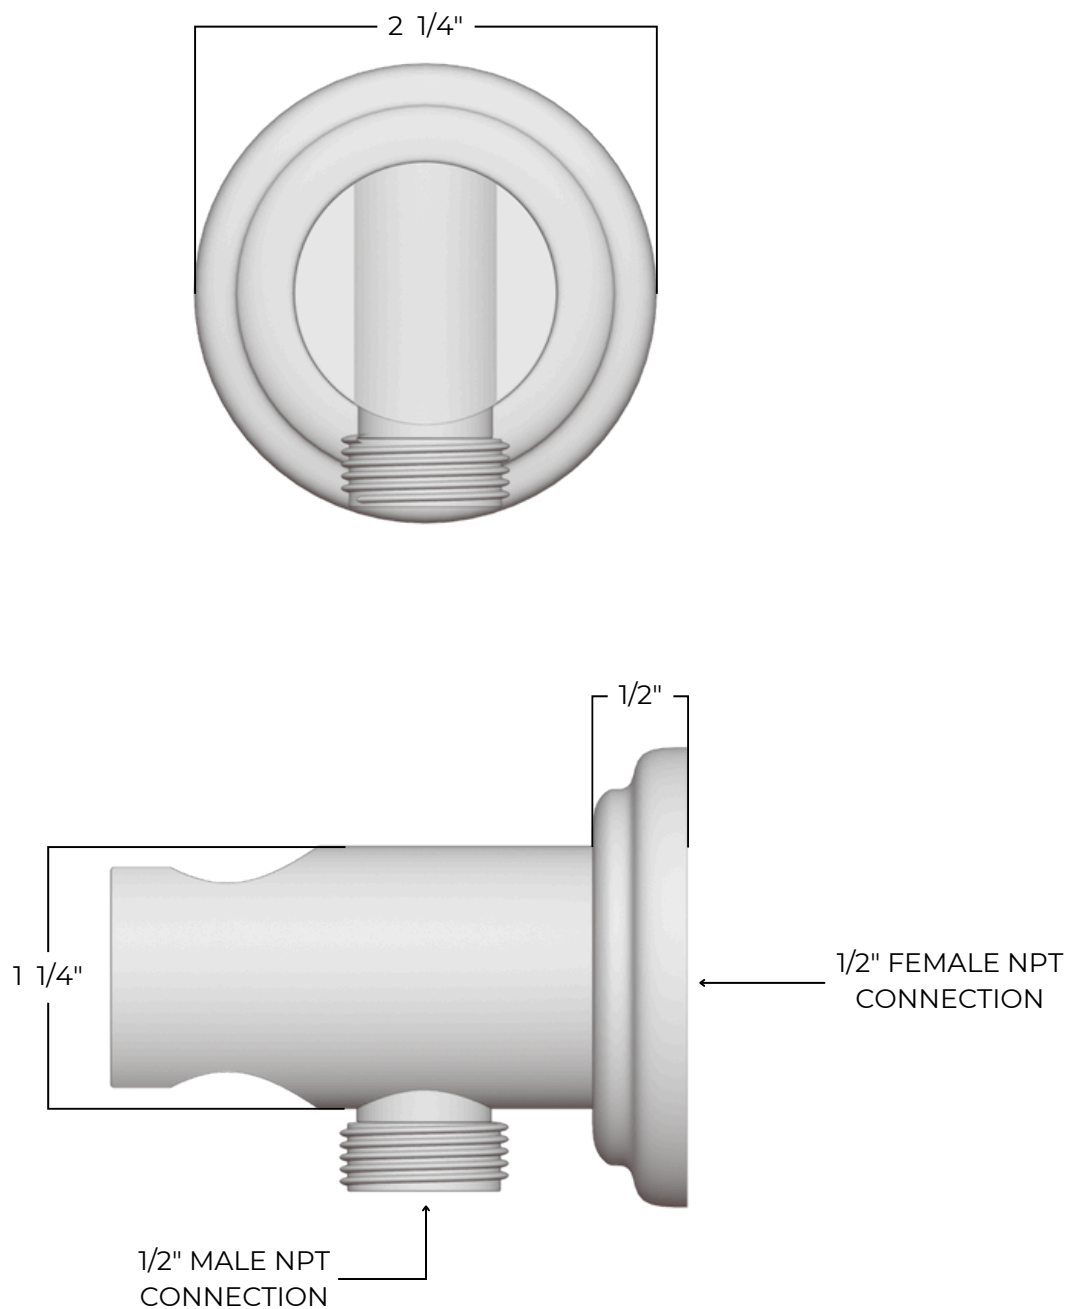

PS140CL


Classic Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Hand Held Shower

artos®

PRODUCT DIMENSIONS

PRODUCT SKU

F901-23

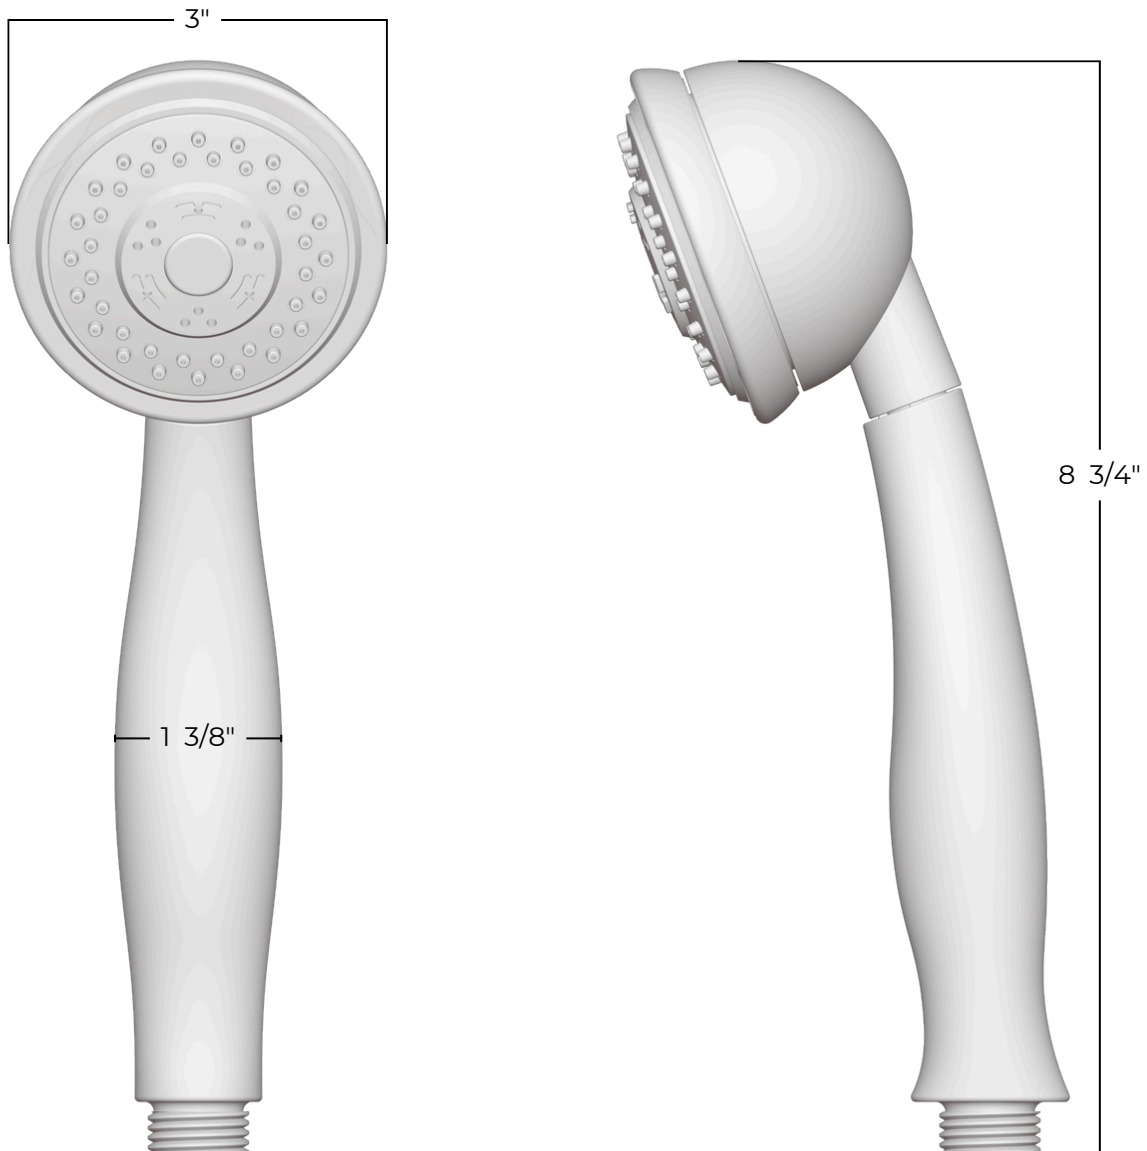

PS140CL


Classic Thermostatic Shower Trim Kit with
Wall Mount Shower Head, Hand Held Shower

artos®

PRODUCT DIMENSIONS

PRODUCT SKU

F902-8

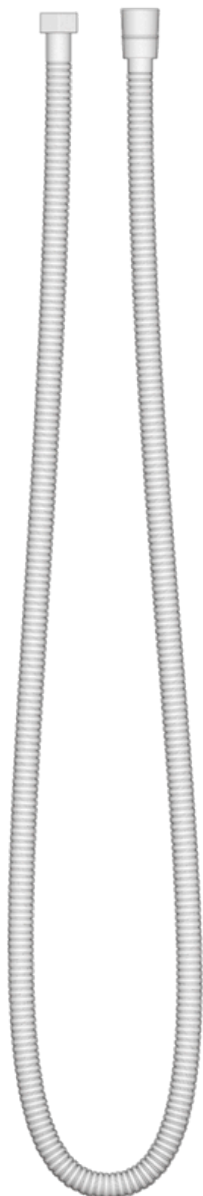

METAL SHOWER HOSE

1/2" FEMALE CONNECTIONS
60" IN LENGTH