

# PS136CL

artos®

Classic Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower on Slide Bar

## OPERATING SPECIFICATIONS

### OPERATING PRESSURE

Minimum: 15 psi

Maximum: 125 psi

Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°

### FLOW CAPACITY

Shower Head: 1.8 USGPM

Hand Shower: 1.8 USGPM

### STANDARDS

ASSE 1016-2011

ASME\_A112.1016-2011

CSA B125:16-11



# PS136CL


artos®

Classic Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower on Slide Bar

## PRODUCT DIMENSIONS

### PRODUCT SKU

F903B-62TK

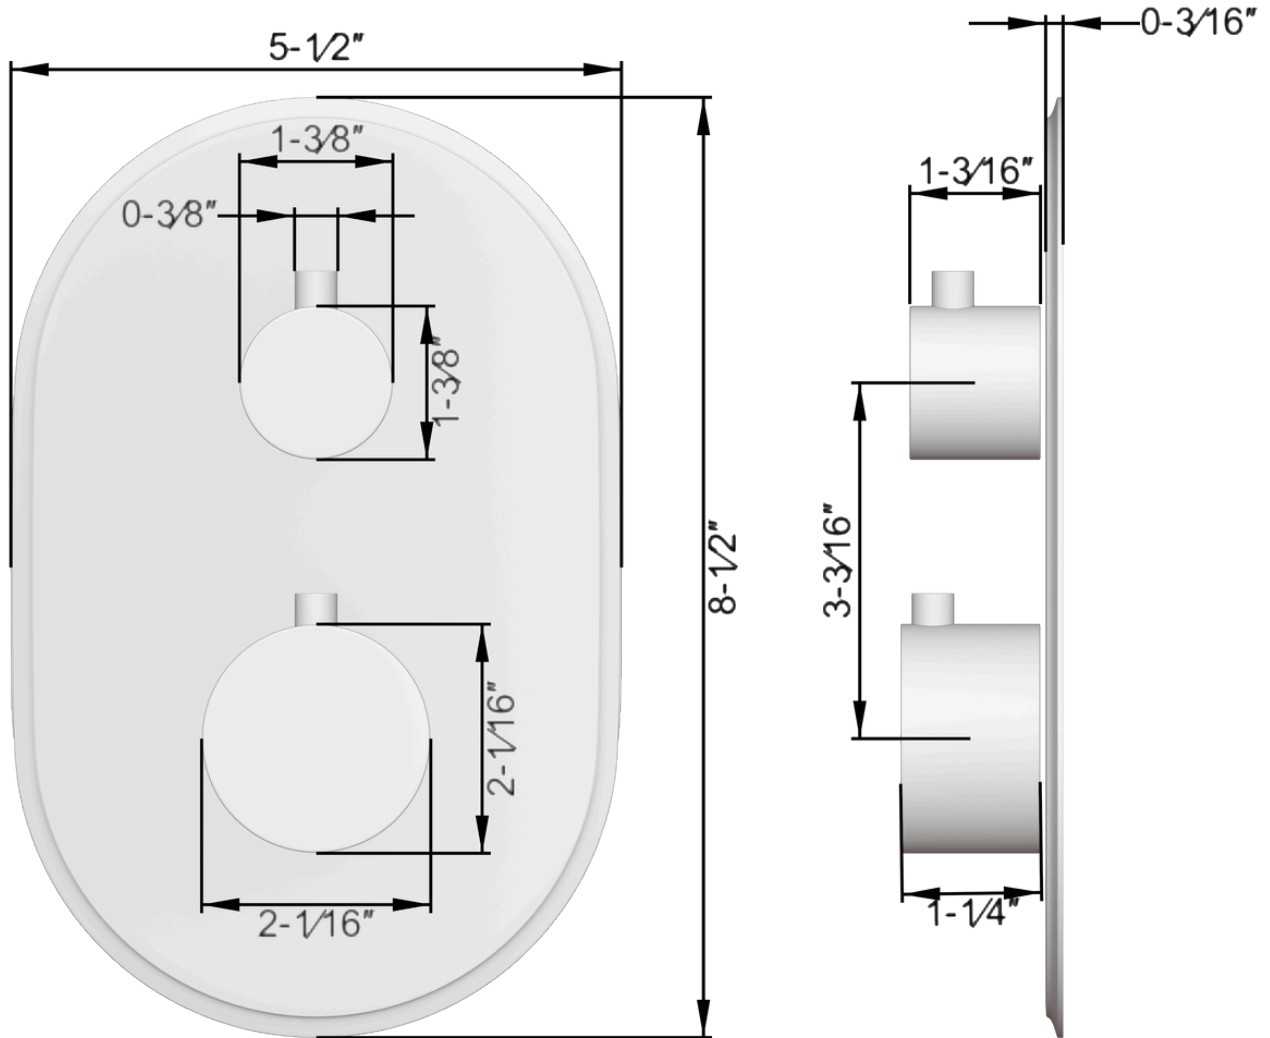

# PS136CL


artos®

Classic Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower on Slide Bar

## PRODUCT DIMENSIONS

### PRODUCT SKU

F902-1CL

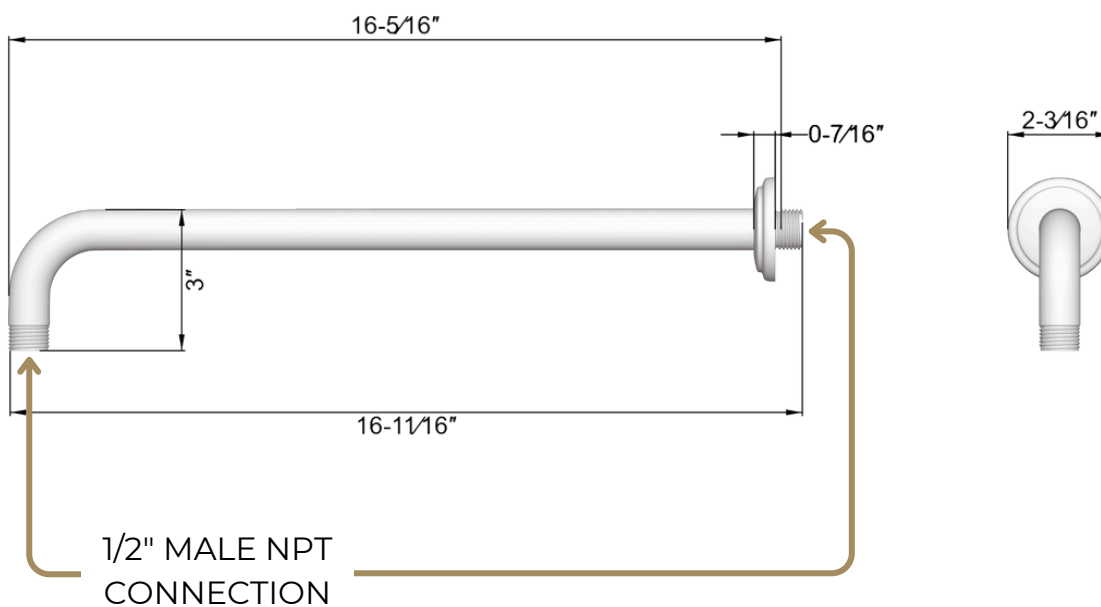

# PS136CL



artos®

Classic Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower on Slide Bar

## PRODUCT DIMENSIONS

### PRODUCT SKU

F901-22

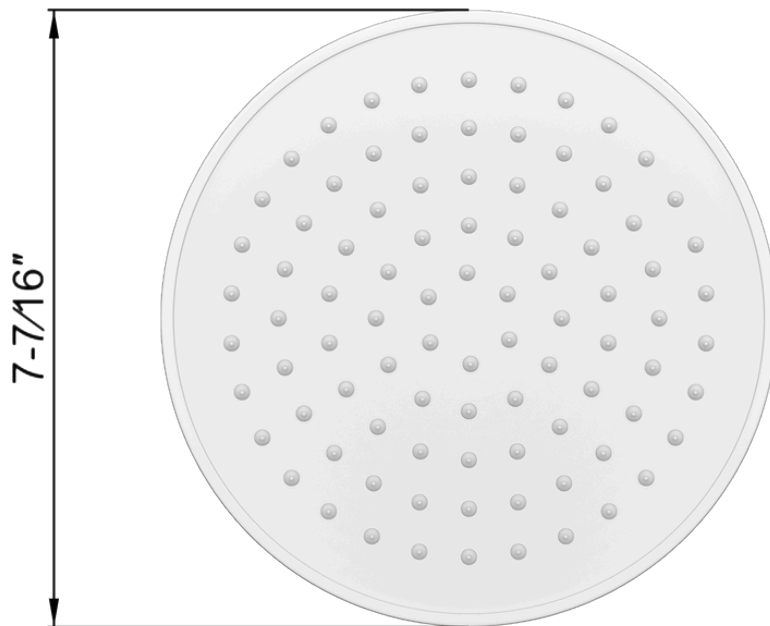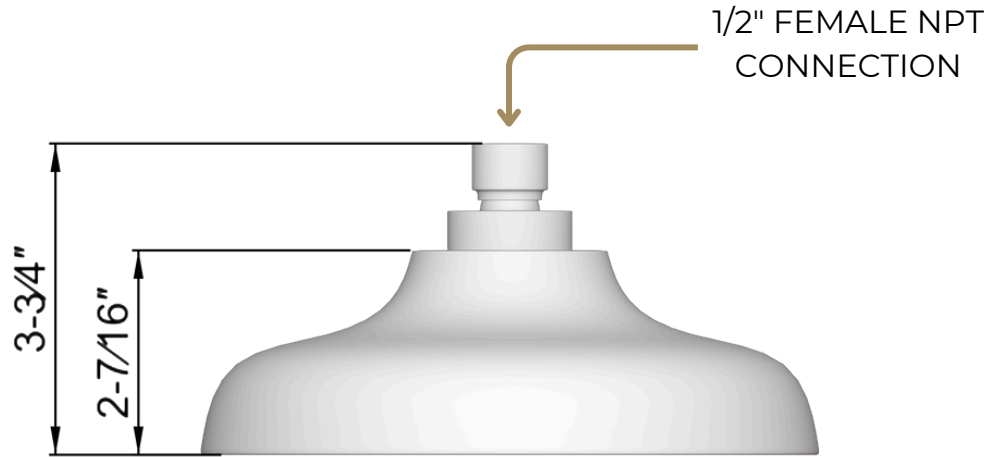

# PS136CL


artos®

Classic Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower on Slide Bar

## PRODUCT DIMENSIONS

### PRODUCT SKU

F907-91

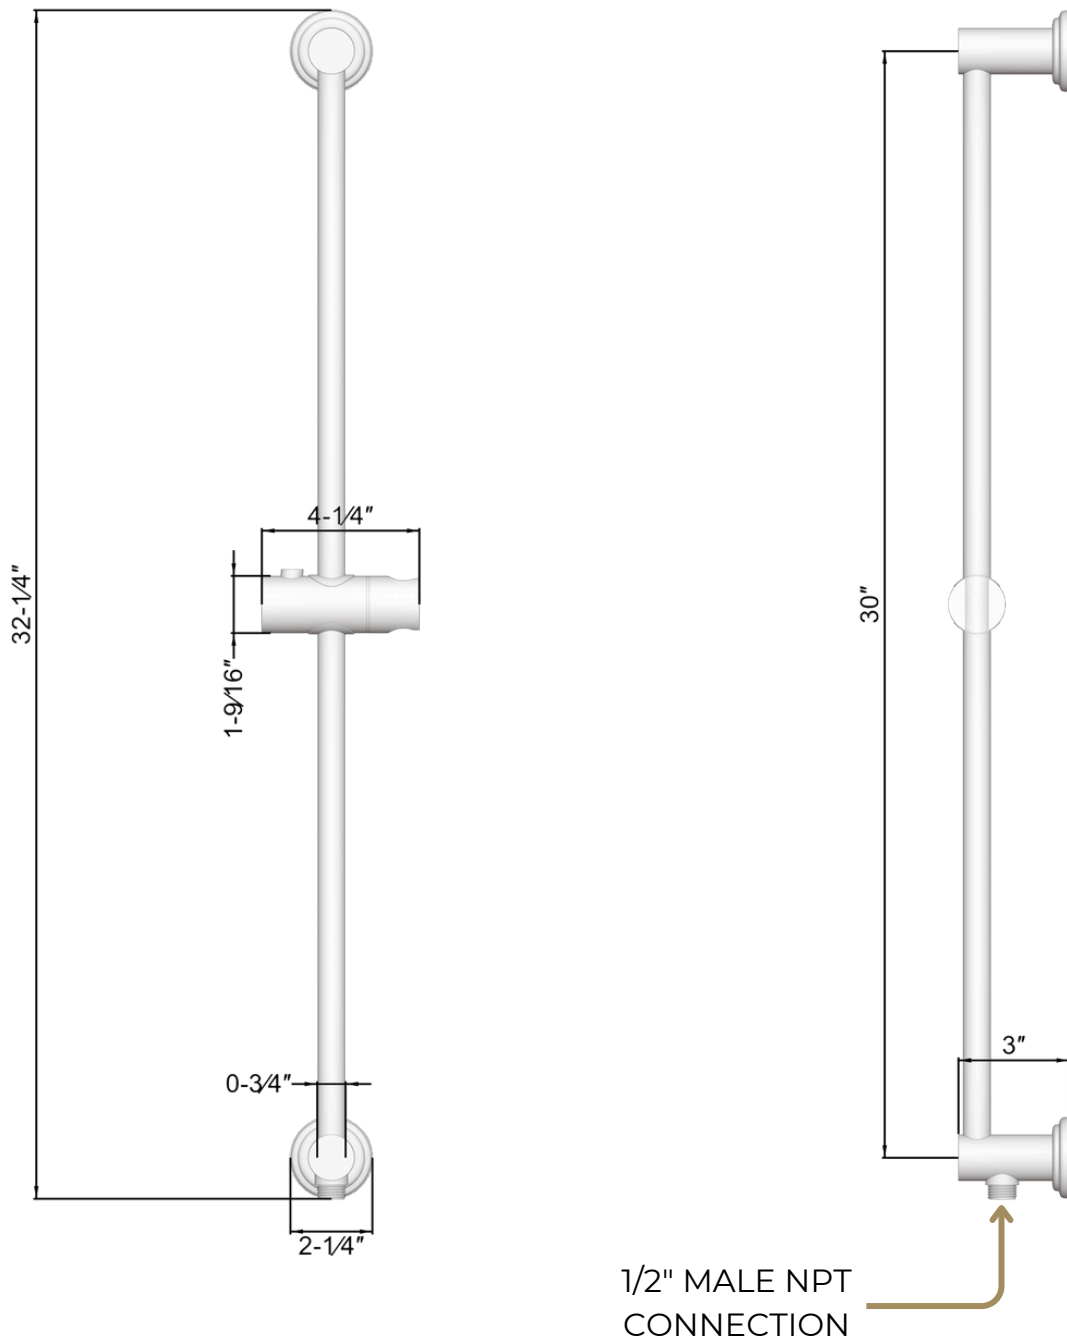

# PS136CL


artos®

Classic Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower on Slide Bar

## PRODUCT DIMENSIONS

### PRODUCT SKU

F901-23

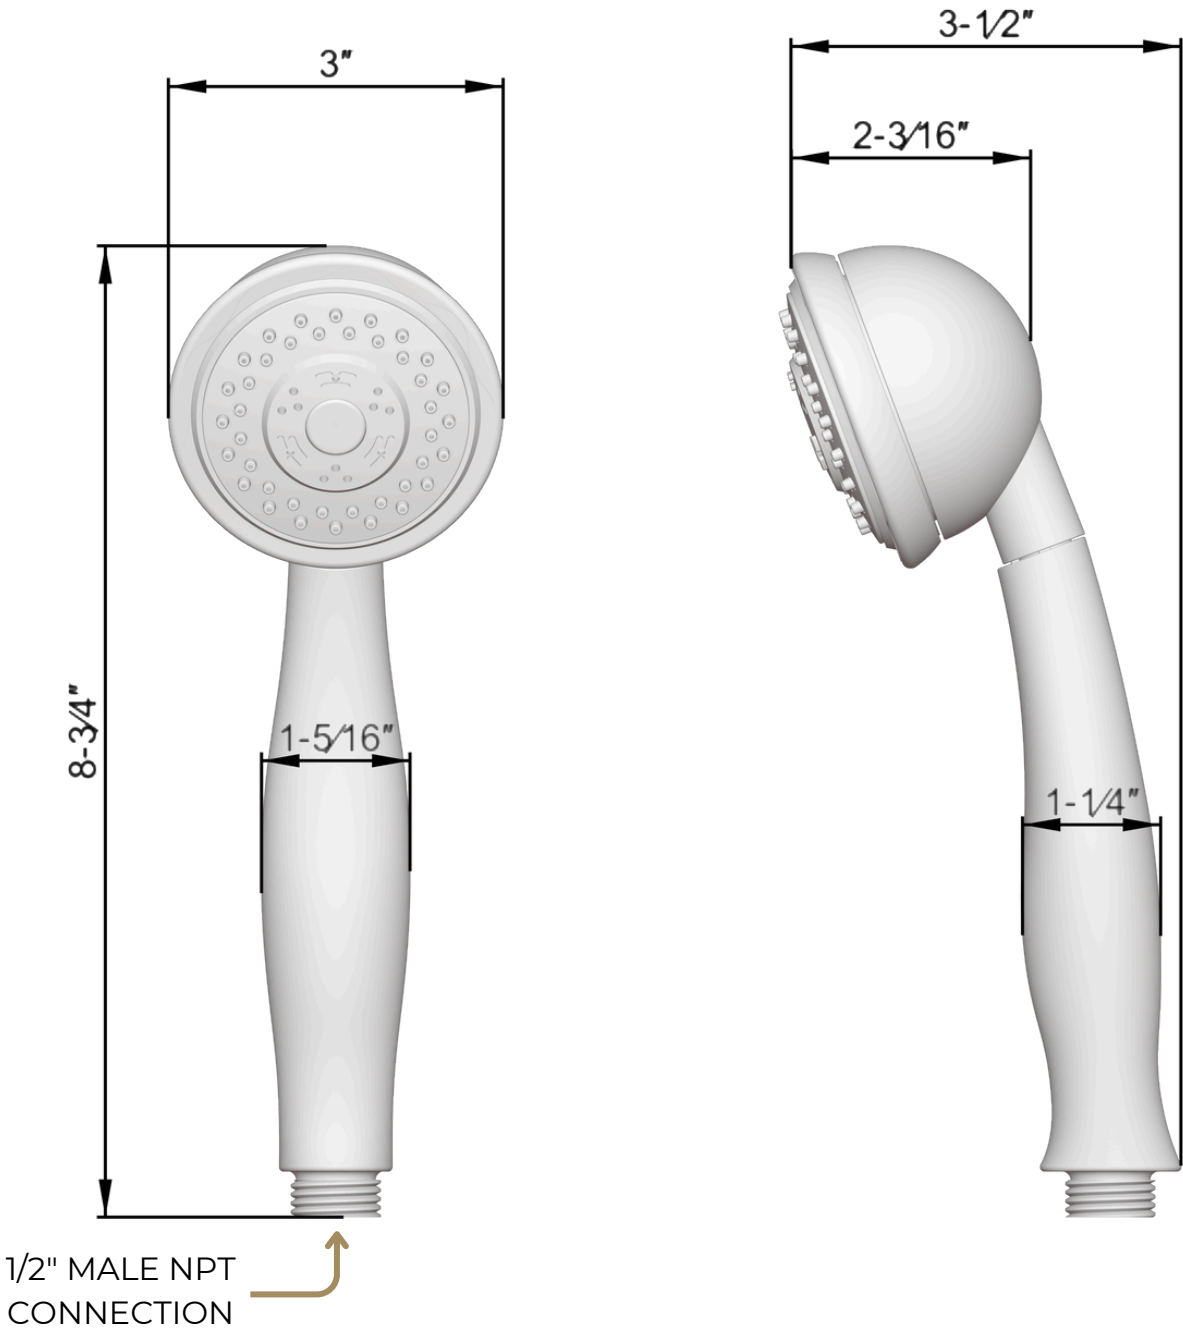

# PS136CL

Classic Thermostatic Shower Trim Kit with Wall Mount Shower Head, Hand Held Shower on Slide Bar


artos®

## PRODUCT DIMENSIONS

---

### PRODUCT SKU

F902-8

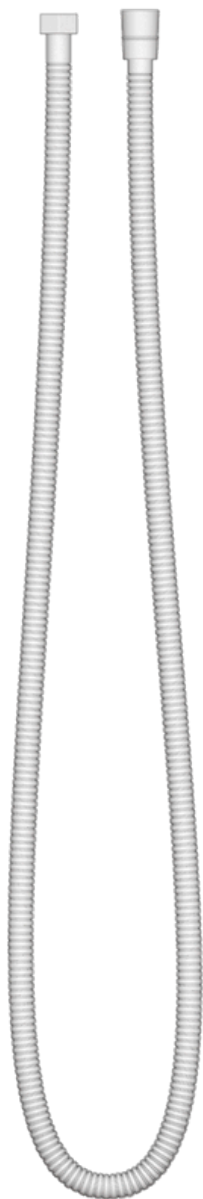

### METAL SHOWER HOSE

1/2" FEMALE NPT CONNECTIONS  
60" IN LENGTH