

artos

F904A-6TK

3/4" thermostatic valve trim
kit only squ+letterbox

OPERATING SPECIFICATIONS

for associated valve | F904A-V0

MIXED WATER TEMPERATURE

Maximum: 120°F

HOT WATER SUPPLY TEMPERATURE

Maximum: 185°F

Minimum: 50°F

Advisable: 150°F- 160°F

Minimum difference between hot mixed temperature 50°F


OPERATING PRESSURE

Maximum: 125psi

Minimum: 20psi

Recommended: 30psi- 95psi

Operating pressures (on hot and cold lines) should be kept as balanced as possible, in order to assure the maximum efficiency.

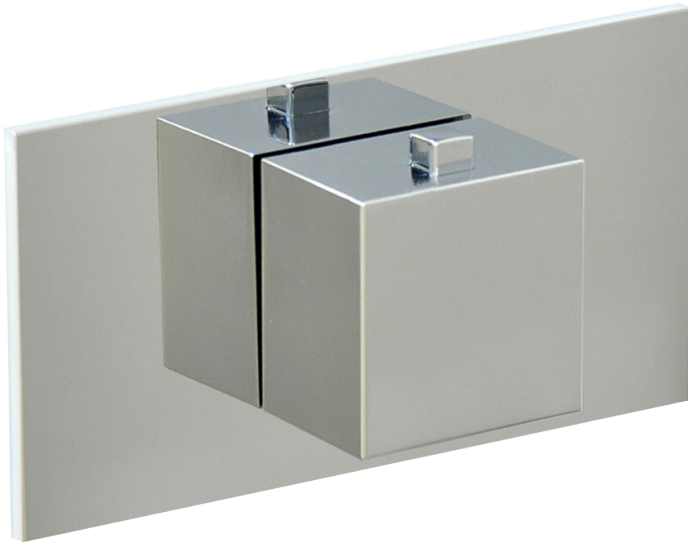

artos

F904A-6TK

PRODUCT DIMENSIONS

3/4" thermostatic valve trim
kit only squ+letterbox

